

Warning, Offer of Sale

 **WARNING**

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.
























This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application including consequences of any failure, and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

Offer of Sale

The items described in this document are hereby offered for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated on the separate page of this document entitled "Offer of Sale".

Index

Introduction		
Direct Acting		“XM” Series
		15mm Solenoid Valve
Stacking		Moduflex Series
		“PVL” Series
Inline		Viking Lite
		Viking Xtreme
		“B” Series
		“ADEX” Series
		“N” Series
Subbase & Manifold		Isys Micro Series
		Isys ISO Series
		Fieldbus Systems
		“DX” ISOMAX Series
		Valvair II
Manual / Mechanical		Directair 2 & 4 Series, Manual/Mechanical
		“42” Lever / Pedal Series
		Viking Xtreme Lever Series
		“M0” Series
		“LV” / “EZ” Lockout Valves
		Brass Poppet / Sliding Seal / “PL”/“VL” / “HV”
Accessories		Control Panel Products
		Sensing
		Flow Controls & Accessories
Safety Guide, Offer of Sale		

Index

<ul style="list-style-type: none"> • Valve Selector Chart (By Flow) • Fieldbus Solutions Guide • Fluid Power Graphic Symbols • Technical Information • 5-Year Warranty 	<p>www.parker.com/pneu/xm</p>	<p>A</p>
<ul style="list-style-type: none"> • Direct Acting Solenoid • 3-Way & 4-Way • Inline • IEM Bar Manifold • Subbase Valve Manifolds • .15 Cv 		
<ul style="list-style-type: none"> • Compact & Simplified Design • Subbase or Manifold Option • 3-Way • NO & NC on Same Manifold • Wide Range of Voltage • .033 to .05 Cv 	<p>www.parker.com/pneu/15mm</p>	<p>C</p> <p>Stacking</p>
<ul style="list-style-type: none"> • Stand Alone Valves • Valve Island • Collective Wiring or Fieldbus Configuration • 3-Way & 4-Way • Modular & Flexible Design • Multiple Pressure Option • Compact & Low Weight • .18 to .80 Cv 		
<ul style="list-style-type: none"> • Compact Composite Design • Modular with a Wide Range of Voltages • 3-Way & 4-Way • Fieldbus Available • .6 to 1.2 Cv 	<p>www.parker.com/pneu/pvl</p>	<p>D</p> <p>Inline</p>
<ul style="list-style-type: none"> • Inline valve. Optional aluminum bar manifolds • 3 valve sizes: 1/8, 1/4 & 3/8. CV: 0.6 to 2.5 • Pressures up to 145 PSIG & temperatures between 14°F to 122°F • Bi-directional WCS spool 		
<ul style="list-style-type: none"> • Extreme Temperature & Pressure Ranges • ATEX Options • 4-Way • Wide Range of Voltages for Mobile Industries • Unique Overmoulded Spool Technology • .7 to 2.7 Cv 	<p>www.parker.com/pneu/vikingx</p>	
<ul style="list-style-type: none"> • Wide Range of Sizes & Flows • Multiple Options • IEM Bar Manifold • 3-Way & 4-Way • Wear Compensating Dynamic Sealing System • .75 to 7.0 Cv 		<p>www.parker.com/pneu/b</p>
<ul style="list-style-type: none"> • 10mm 3-Way • 15mm & 20mm 4-Way • Low Power Consumption • Subbase & Inline Body • Individual & Collective Wiring Solutions • .01 to .47 Cv 	<p>www.parker.com/pneu/adex</p>	
<ul style="list-style-type: none"> • Robust Poppet Design • Fast Response & High Flow • 2-Way & 3-Way • High Maximum Pressure Option • 3.6 to 29.9 Cv 		<p>www.parker.com/pneu/n</p>
<ul style="list-style-type: none"> • Compact Valves with High Flow • Innovative Back to Back Mounting Style with 4 Valves in a 42mm Width • Plug-in Design with Collective Wiring on Fieldbus or 25 Pin Cable • .35 Cv 	<p>www.parker.com/pneu/isysmicro</p>	
<ul style="list-style-type: none"> • ISO Valve Platform, 18mm, 26mm, Size 1, Size 2, & Size 3 Plug-in • Collective Wiring on Fieldbus or 25-Pin or M23 Cable • Non Plug-in Valves with 3-Pin Din or Mini Connectors • .55 to 6.0 Cv 		<p>www.parker.com/pneu/isys</p>
<ul style="list-style-type: none"> • Isys Micro Fieldbus • Moduflex Fieldbus • Isysnet Fieldbus • Turck Fieldbus 	<p>www.parker.com/pneu/isysnet</p>	
<ul style="list-style-type: none"> • ISO Valve Platform, 18mm, 26mm, Size 1, Size 2, & Size 3 • Non Plug-in Valves with 3-Pin Din or Mini Connectors • .55 to 4.15 Cv 		<p>www.parker.com/pneu/isomax</p>
<ul style="list-style-type: none"> • Robust Spool Design • Fast Response & High Flow • Plug-in & Direct Pipe Design • 4-Way • Hazardous Duty Option • 1.9 to 12.0 Cv 	<p>www.parker.com/pneu</p>	
<ul style="list-style-type: none"> • Robust Poppet & Spool Designs • 3-Way & 4-Way • Manual & Mechanical • Plunger, Roller, One-Way Tripper, Button, Hand Lever, Toggle, Treadle • 1/8" & 1/4" NPT • .17 to .83 Cv 		<p>www.parker.com/pneu/directair</p>
<ul style="list-style-type: none"> • Heavy Duty Design • 4-Way • Lever, Pedal Operated • 1/4" & 3/8" NPT • 1.3 to 2.8 Cv 	<p>www.parker.com/pneu/42ser</p>	
<ul style="list-style-type: none"> • Heavy Duty Lever Operated • 4-Way • 1/8 to 1/2" NPT • .7 to 2.7 Cv 		<p>www.parker.com/pneu/vikingx</p>
<ul style="list-style-type: none"> • Heavy Duty Design • Bronze Body • 3-Way & 4-Way, Air Pilot Manual & Mechanical Valves • 1/4" to 1" NPTF Ports • 2.4 to 12.4 Cv 	<p>www.parker.com/pneu</p>	
<ul style="list-style-type: none"> • Compliant with OSHA Standard 29 CFR 1910 • Lockout / Soft Start • 3.7 to 14.0 Cv 		<p>www.parker.com/pneu/lockout</p>
<ul style="list-style-type: none"> • Manual Valves • Lever & Button Operators • 1/8" thru 1/2" Ports • Wide Range of Sizes & Flows • .5 to 1.25 Cv 	<p>www.parker.com/pneu/ssv</p>	
<ul style="list-style-type: none"> • Variety of Control Panel Options - Push Buttons - Indicators - Foot Pedals • Large Selection of Options • Two-Hand Control Conformance with EN 574 		<p>www.parker.com/pneu/cpp</p>
<ul style="list-style-type: none"> • Large Variety of Limit & Pressure Switches • Limit Switches for Standard & Heavy Duty Service • Blocking Valves for Air, Gas & Liquid Service • Threshold Sensors for Monitoring Cylinder Exhaust 	<p>www.parker.com/pneu/limsen</p>	
<ul style="list-style-type: none"> • Flow Controls • Check Valves • Needle Valves • Muffler & Silencers • Relief Valves • Quick Exhaust Valves • Ball Valves • Fittings • Tubing & Hose • Quick Couplings 		<p>www.parker.com/pneu/accessories</p>
<ul style="list-style-type: none"> • Safety Guide • Offer of Sale 		





Viking Lite Inline Series

Air Control Valves


P2LAZ – 1/8"

P2LBZ – 1/4"

P2LCZ – 3/8"

Section D

www.parker.com/pneu/vikingx

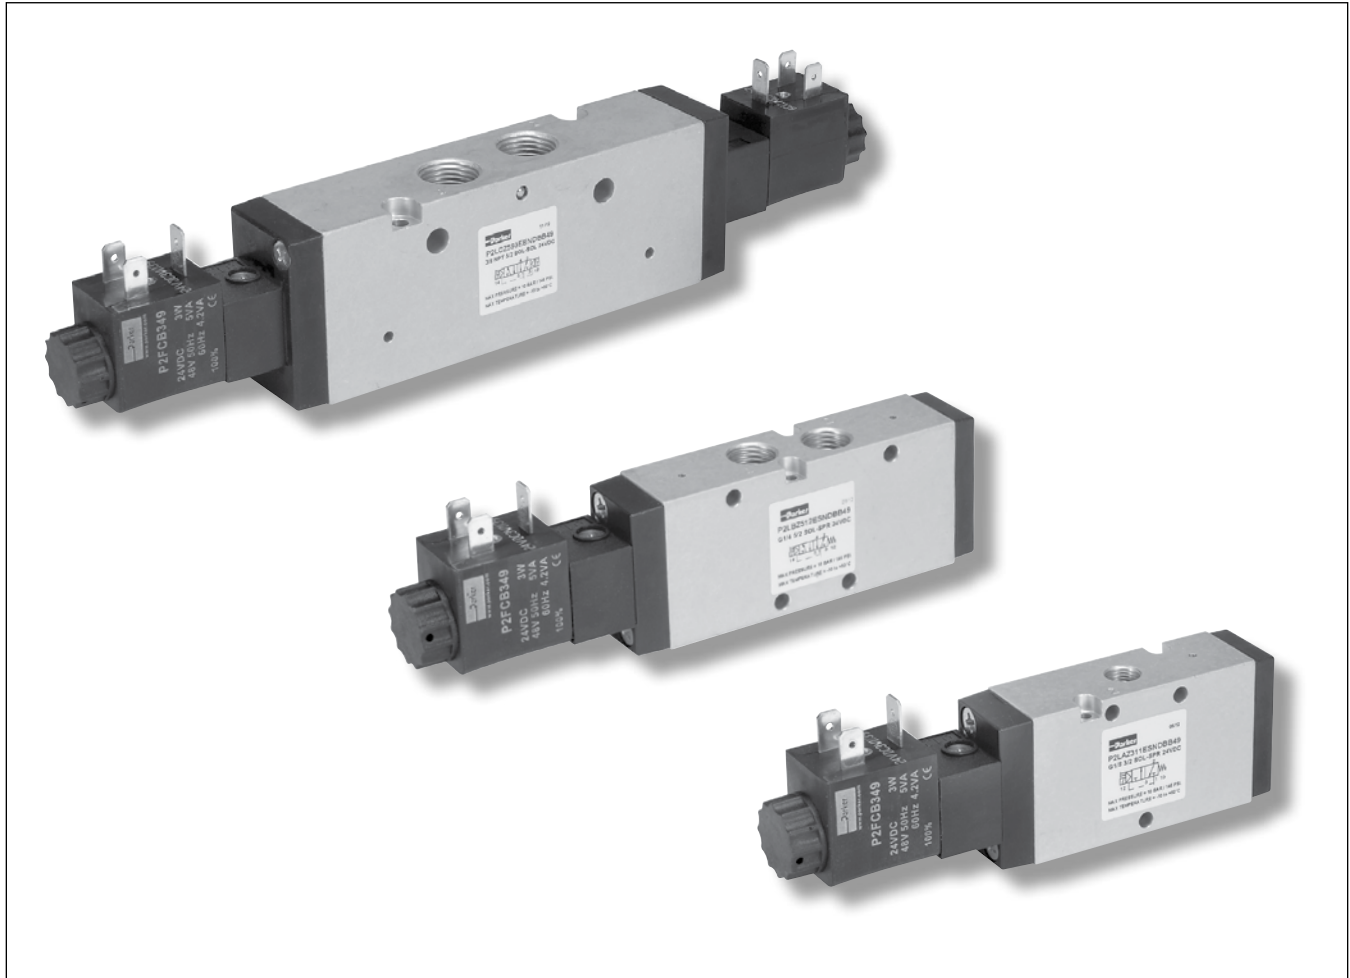

D

Viking Lite

Viking Xtreme

B

ADEX

N

Basic Valve Functions D2

Basic Valve Features D3

Common Part Numbers.....D4-D5

Solenoid Valve Model Number Index D5

IEM Bar Manifolds, Assemblies & Accessories D6

Dimensions.....D6-D10

BOLD ITEMS ARE MOST POPULAR.




Basic Valve Functions

Viking Lite Series Valves Air Control Valves

Single solenoid

3-Way, 2-Position NC (NNP)




Normally Closed:

De-energized position – Solenoid #12 de-energized. Pressure at inlet port 1 blocked, outlet port 2 connected to exhaust port 3.

Energized position – Solenoid #12 energized. Pressure at inlet port 1 connected to outlet port 2, exhaust port 3 is blocked.

Double solenoid

3-Way, 2-Position




Solenoid operator #12 energized last. Pressure at inlet port 1 connected to outlet port 2, exhaust port 3 is blocked.

Solenoid operator #10 energized last. Pressure at inlet port 1 blocked, outlet port 2 connected to exhaust port 3.

Single solenoid

Single pressure at inlet port 1:




De-energized position – Solenoid operator #14 de-energized. Pressure at inlet port 1 connected to outlet port 2. Outlet port 4 connected to exhaust port 5.

Energized position – Solenoid operator #14 energized. Pressure at inlet port 1 connected to outlet port 4. Outlet port 2 connected to exhaust port 3.

Double solenoid


Single pressure at inlet port 1:



Solenoid operator #14 energized last. Pressure at inlet port 1 connected to outlet port 4. Outlet port 2 connected to exhaust port 3.

Solenoid operator #12 energized last. Pressure at inlet port 1 connected to outlet port 2. Outlet port 4 connected to exhaust port 5.

Double solenoid 3-position

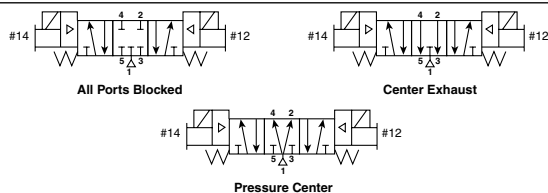

With #12 operator energized – inlet port 1 connected to cylinder port 2, cylinder port 4 connected to exhaust port 5.

With #14 operator energized – inlet port 1 connected to cylinder port 4, cylinder port 2 connected to exhaust port 3.

All Ports Blocked

All ports blocked in the center position.

Center Exhaust


Cylinder ports 2 and 4 connected to exhaust ports 3 and 5 in center position. Port 1 is blocked.

Pressure Center

Pressure port 1 connected to cylinder ports 2 and 4, and exhaust ports 3 and 5 blocked in center position.

Single remote pilot

3-Way, 2-Position NC (NNP)




Normally Closed:

Normal position – Pressure at inlet port 1 blocked, outlet port 2 connected to exhaust port 3.

Operated position – Maintained air signal at port 12. Pressure at inlet port 1 connected to outlet port 2, exhaust port 3 is blocked.

Double solenoid

3-Way, 2-Position




Momentary air signal at port 12 last. Pressure at inlet port 1 connected to outlet port 2, exhaust port 3 is blocked.

Momentary air signal at port 10 last. Pressure at inlet port 1 blocked, outlet port 2 connected to exhaust port 3.

Single remote pilot

Single pressure at inlet port 1:




Normal position – Pressure at inlet port 1 connected to outlet port 2. Outlet port 4 connected to exhaust port 5.

Operated position – Maintained air signal at port 14. Pressure at inlet port 1 connected to outlet port 4. Outlet port 2 connected to exhaust port 3.

Double remote pilot


Single pressure at inlet port 1:



Momentary air signal at port 14 last. Pressure at inlet port 1 connected to outlet port 4. Outlet port 2 connected to exhaust port 3.

Momentary air signal at port 12 last. Pressure at inlet port 1 connected to outlet port 2. Outlet port 4 connected to exhaust port 5.

Double remote pilot 3-position

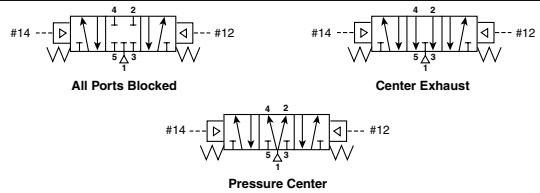

With #12 operator signaled – inlet port 1 connected to cylinder port 2, cylinder port 4 connected to exhaust port 5.

With #14 operator signaled – inlet port 1 connected to cylinder port 4, cylinder port 2 connected to exhaust port 3.

All Ports Blocked

All ports blocked in the center position.

Center Exhaust

Cylinder ports 2 and 4 connected to exhaust ports 3 and 5 in center position. Port 1 is blocked.

Pressure Center

Pressure port 1 connected to cylinder ports 2 and 4, and exhaust ports 3 and 5 blocked in center position.

D

Viking Lite




Viking Xtreme

B

ADEX

N

Specifications

	P2LAZ: 0.6 Cv
	P2LBZ: 1.5 Cv
	P2LCZ: 2.5 Cv

Materials of Construction

- Valve Body: Anodized Aluminum
- Spool: Aluminum
- End Caps: Anodized Aluminum
- Piston: Acetal Plastic / Anodized Aluminum
- End Cover Sealings: Nitrile Rubber
- End Cover Screws: Stainless Steel
- Springs: Stainless Steel
- Spool Seals: Nitrile




Operating Temperature

- Normal: 14°F to 122°F
 (-10°C to 50°C)

Operating Pressure

- Normal: Vacuum to 145 PSIG
 (Vacuum to 10 bar)
- Minimum: Single solenoid - spring return
 43.5 PSIG (3.0 bar)
 Double solenoid - 2-position
 22 PSIG (1.5 bar)
 Double solenoid - 3-position
 43.5 PSIG PSIG (3.0 bar)

Ports

	P2LAX: 1/8" NPT & BSPP
	P2LBX: 1/4" NPT & BSPP
	P2LCX: 3/8" NPT & BSPP

Compliance / Approval

- IP65 Rated, RoHS, CE

Solenoids


- 2.5 Watts
 – 22mm, 3-Pin (DIN 43650),
- 24VDC to 120VAC

Mounting

- Inline
- IEM Aluminum Bar

WCS

- Maximum Performance
 – Low friction - fast response - less wear
- Long Cycle Life
 – Under pressure, radial expansion of the seal occurs to maintain sealing contact with the valve bore
- Non-Lube Service
 – No lubrication required for continuous valve shifting
- Bi-Directional Spool Seals
 – Common spool used for any pressure

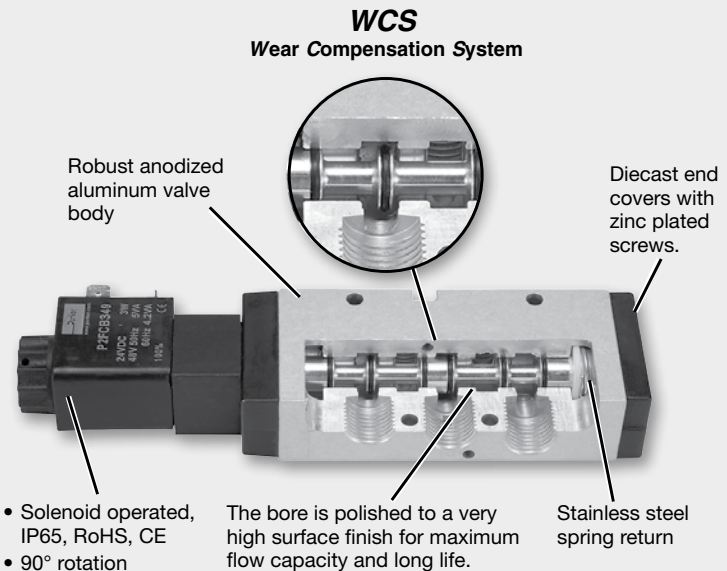

D

Viking Lite


Viking Xtreme

B

ADEX

N


3/2 - 2 Position Single Solenoid



P2LAZ Shown

Port size	Cv	Response time (msec)	Weight lb (kg)	Voltage	Part number (NPT)	Part number (BSPP)
1/8	0.6	15 / 35	0.35 (0.16)	24VDC	P2LAZ391ESNDBB49	P2LAZ311ESNDBB49
				120VAC	P2LAZ391ESNDBB53	P2LAZ311ESNDBB53
1/4	1.5	18 / 45	0.35 (0.16)	24VDC	P2LBZ392ESNDBB49	P2LBZ312ESNDBB49
				120VAC	P2LBZ392ESNDBB53	P2LBZ312ESNDBB53
3/8	2.5	27 / 45	0.77 (0.35)	24VDC	P2LCZ393ESNDBB49	P2LCZ313ESNDBB49
				120VAC	P2LCZ393ESNDBB53	P2LCZ313ESNDBB53


3/2 - 2 Position Double Solenoid



P2LAZ Shown

Port size	Cv	Response time (msec)	Weight lb (kg)	Voltage	Part number (NPT)	Part number (BSPP)
1/8	0.6	10 / 10	0.40 (0.18)	24VDC	P2LAZ391EENDBB49	P2LAZ311EENDBB49
				120VAC	P2LAZ391EENDBB53	P2LAZ311EENDBB53
1/4	1.5	12 / 12	0.40 (0.18)	24VDC	P2LBZ392EENDBB49	P2LBZ312EENDBB49
				120VAC	P2LBZ392EENDBB53	P2LBZ312EENDBB53
3/8	2.5	17 / 17	0.80 (0.36)	24VDC	P2LCZ393EENDBB49	P2LCZ313EENDBB49
				120VAC	P2LCZ393EENDBB53	P2LCZ313EENDBB53

5/2 - 2 Position Single Solenoid



P2LAZ Shown

Port size	Cv	Response time (msec)	Weight lb (kg)	Voltage	Part number (NPT)	Part number (BSPP)
1/8	0.6	15 / 35	.037 (0.17)	24VDC	P2LAZ591ESNDBB49	P2LAZ511ESNDBB49
				120VAC	P2LAZ591ESNDBB53	P2LAZ511ESNDBB53
1/4	1.5	18 / 45	0.44 (0.20)	24VDC	P2LBZ592ESNDBB49	P2LBZ512ESNDBB49
				120VAC	P2LBZ592ESNDBB53	P2LBZ512ESNDBB53
3/8	2.5	27 / 45	0.95 (0.43)	24VDC	P2LCZ593ESNDBB49	P2LCZ513ESNDBB49
				120VAC	P2LCZ593ESNDBB53	P2LCZ513ESNDBB53


5/2 - 2 Position Double Solenoid



P2LAZ Shown

Port size	Cv	Response time (msec)	Weight lb (kg)	Voltage	Part number (NPT)	Part number (BSPP)
1/8	0.6	10 / 10	.042 (0.19)	24VDC	P2LAZ591EENDBB49	P2LAZ511EENDBB49
				120VAC	P2LAZ591EENDBB53	P2LAZ511EENDBB53
1/4	1.5	12 / 12	0.46 (0.21)	24VDC	P2LBZ592EENDBB49	P2LBZ512EENDBB49
				120VAC	P2LBZ592EENDBB53	P2LBZ512EENDBB53
3/8	2.5	17 / 17	0.97 (0.44)	24VDC	P2LCZ593EENDBB49	P2LCZ513EENDBB49
				120VAC	P2LCZ593EENDBB53	P2LCZ513EENDBB53

5/3 - 3 Position, All Ports Blocked




P2LAZ Shown

Port size	Cv	Response time (msec)	Weight lb (kg)	Voltage	Part number (NPT)	Part number (BSPP)
1/8	0.6	18 / 40	0.57 (0.26)	24VDC	P2LAZ691EENDBB49	P2LAZ611EENDBB49
				120VAC	P2LAZ691EENDBB53	P2LAZ611EENDBB53
1/4	1.5	22 / 55	0.62 (0.28)	24VDC	P2LBZ692EENDBB49	P2LBZ612EENDBB49
				120VAC	P2LBZ692EENDBB53	P2LBZ612EENDBB53
3/8	2.5	30 / 90	1.32 (0.60)	24VDC	P2LCZ693EENDBB49	P2LCZ613EENDBB49
				120VAC	P2LCZ693EENDBB53	P2LCZ613EENDBB53

Notes: Response time: Actuate to 90% pressure / return to exhaust to 10% of supply pressure. 93 PSIG (6.3 bar) / temperature 68°F (20°C).




5/3 - 3 Position, Pressure Center



P2LAZ Shown

Port size	Cv	Response time (msec)	Weight lb (kg)	Voltage	Part number (NPT)	Part number (BSPP)
1/8	0.6	18 / 40	0.57 (0.26)	24VDC	P2LAZ791EENDBB49	P2LAZ711EENDBB49
				120VAC	P2LAZ791EENDBB53	P2LAZ711EENDBB53
1/4	1.5	22 / 55	0.62 (0.28)	24VDC	P2LBZ792EENDBB49	P2LBZ712EENDBB49
				120VAC	P2LBZ792EENDBB53	P2LBZ712EENDBB53
3/8	2.5	30 / 90	1.32 (0.60)	24VDC	P2LCZ793EENDBB49	P2LCZ713EENDBB49
				120VAC	P2LCZ793EENDCB53	P2LCZ713EENDBB53

5/3 - 3 Position, Center Exhaust



P2LAZ Shown

Port size	Cv	Response time (msec)	Weight lb (kg)	Voltage	Part number (NPT)	Part number (BSPP)
1/8	0.6	18 / 40	0.57 (0.26)	24VDC	P2LAZ891EENDBB49	P2LAZ811EENDBB49
				120VAC	P2LAZ891EENDBB53	P2LAZ811EENDBB53
1/4	1.5	22 / 55	0.62 (0.28)	24VDC	P2LBZ892EENDBB49	P2LBZ812EENDBB49
				120VAC	P2LBZ892EENDBB53	P2LBZ812EENDBB53
3/8	2.5	30 / 90	1.32 (0.60)	24VDC	P2LCZ893EENDBB49	P2LCZ813EENDBB49
				120VAC	P2LCZ893EENDBB53	P2LCZ813EENDBB53

Notes: Response time: Actuate to 90% pressure / return to exhaust to 10% of supply pressure. 93 PSIG (6.3 bar) / temperature 68°F (20°C).


Single & Double Solenoid Operated Valves

P2LAZ591ESND CB49

<p>Valve size</p> <table border="1"> <tr><td>1/8"</td><td>A</td></tr> <tr><td>1/4"</td><td>B</td></tr> <tr><td>3/8"</td><td>C</td></tr> </table> <p>Series</p> <table border="1"> <tr><td>Viking Lite</td><td>Z</td></tr> </table> <p>Valve type / function</p> <table border="1"> <tr><td colspan="2"><i>Internal pilot supply to solenoid</i></td></tr> <tr><td>3/2 NC - 2-position</td><td>3</td></tr> <tr><td>5/2 2-position</td><td>5</td></tr> <tr><td>5/3 3-position, APB</td><td>6</td></tr> <tr><td>5/3 3-position, PC</td><td>7</td></tr> <tr><td>5/3 3-position, CE</td><td>8</td></tr> </table> <p>Main port thread</p> <table border="1"> <tr><td>G1/8 (P2LA)</td><td>11</td></tr> <tr><td>G1/4 (P2LB)</td><td>12</td></tr> <tr><td>G3/8 (P2LC)</td><td>13</td></tr> <tr><td>1/8" NPT (P2LA)</td><td>91</td></tr> <tr><td>1/4" NPT (P2LB)</td><td>92</td></tr> <tr><td>3/8" NPT (P2LC)</td><td>93</td></tr> </table>	1/8"	A	1/4"	B	3/8"	C	Viking Lite	Z	<i>Internal pilot supply to solenoid</i>		3/2 NC - 2-position	3	5/2 2-position	5	5/3 3-position, APB	6	5/3 3-position, PC	7	5/3 3-position, CE	8	G1/8 (P2LA)	11	G1/4 (P2LB)	12	G3/8 (P2LC)	13	1/8" NPT (P2LA)	91	1/4" NPT (P2LB)	92	3/8" NPT (P2LC)	93	<p>12 End operator</p> <table border="1"> <tr><td>E</td><td>Double solenoid operated valve</td></tr> <tr><td>S*</td><td>Single solenoid spring return</td></tr> </table> <p>Solenoid pilot type</p> <table border="1"> <tr><td>D</td><td>Pilot exhaust vented</td></tr> </table> <p>Overrides</p> <table border="1"> <tr><td>C</td><td>Extended - locking</td></tr> <tr><td>B</td><td>Flush - non-locking</td></tr> </table> <p>Enclosures / lead length</p> <table border="1"> <tr><td>B</td><td>22mm rectangular 3-pin - type B industrial (male only)</td></tr> <tr><td>N</td><td>Valve less coil</td></tr> </table> <p>Voltage / frequency</p> <table border="1"> <tr><td>49</td><td>24VDC</td></tr> <tr><td>53</td><td>120VAC</td></tr> <tr><td>Blank</td><td>Valve less coil</td></tr> </table>	E	Double solenoid operated valve	S*	Single solenoid spring return	D	Pilot exhaust vented	C	Extended - locking	B	Flush - non-locking	B	22mm rectangular 3-pin - type B industrial (male only)	N	Valve less coil	49	24VDC	53	120VAC	Blank	Valve less coil	<p>Valve type</p> <table border="1"> <tr><td>N</td><td>14°F to 122°F (-10°C to 50°C)</td></tr> </table>	N	14°F to 122°F (-10°C to 50°C)	
1/8"	A																																																								
1/4"	B																																																								
3/8"	C																																																								
Viking Lite	Z																																																								
<i>Internal pilot supply to solenoid</i>																																																									
3/2 NC - 2-position	3																																																								
5/2 2-position	5																																																								
5/3 3-position, APB	6																																																								
5/3 3-position, PC	7																																																								
5/3 3-position, CE	8																																																								
G1/8 (P2LA)	11																																																								
G1/4 (P2LB)	12																																																								
G3/8 (P2LC)	13																																																								
1/8" NPT (P2LA)	91																																																								
1/4" NPT (P2LB)	92																																																								
3/8" NPT (P2LC)	93																																																								
E	Double solenoid operated valve																																																								
S*	Single solenoid spring return																																																								
D	Pilot exhaust vented																																																								
C	Extended - locking																																																								
B	Flush - non-locking																																																								
B	22mm rectangular 3-pin - type B industrial (male only)																																																								
N	Valve less coil																																																								
49	24VDC																																																								
53	120VAC																																																								
Blank	Valve less coil																																																								
N	14°F to 122°F (-10°C to 50°C)																																																								

* Not available with 3-position valves.

BOLD ITEMS ARE MOST POPULAR.




Common Part Numbers

IEM Bar Manifold, Inline Valve Only*



Valve series	Valve function	# of Stations	Weight lb (kg)	Manifold only (NPT)	Manifold only (BSPP)
P2LAZ / P2LBZ	3-way	2	0.84 (0.38)	91213202SXZN	91213202SXZ
P2LAZ / P2LBZ	3-way	4	1.41 (0.64)	91213204SXZN	91213204SXZ
P2LAZ / P2LBZ	3-way	6	1.96 (0.89)	91213206SXZN	91213206SXZ
P2LAZ / P2LBZ	3-way	8	2.54 (1.15)	91213208SXZN	91213208SXZ
P2LAZ / P2LBZ	3-way	10	3.09 (1.40)	91213210SXZN	91213210SXZ

Kits include: Manifold, valve hold down bolts, gaskets.



Valve series	Valve function	# of Stations	Weight lb (kg)	Manifold only (NPT)	Manifold only (BSPP)
P2LAZ	4-way	2	0.68 (0.31)	9121658068N	9121658068
P2LAZ	4-way	4	1.06 (0.48)	9121658075N	9121658075
P2LAZ	4-way	6	1.39 (0.63)	9121658076N	9121658076
P2LAZ	4-way	8	1.76 (0.80)	9121658077N	9121658077
P2LAZ	4-way	10	2.16 (0.98)	9121658078N	9121658078

Kits include: Manifold, valve hold down bolts, gaskets.



Valve series	Valve function	# of Stations	Weight lb (kg)	Manifold only (NPT)	Manifold only (BSPP)
P2LBZ	4-way	2	1.53 (0.69)	9121594805XN	9121594805X
P2LBZ	4-way	4	2.49 (1.13)	9121594806XN	9121594806X
P2LBZ	4-way	6	3.44 (1.56)	9121594807XN	9121594807X
P2LBZ	4-way	8	4.41 (2.00)	9121594808XN	9121594808X
P2LBZ	4-way	10	5.40 (2.45)	9121594812XN	9121594812X

Kits include: Manifold, valve hold down bolts, gaskets.

* For odd number of stations, consider Viking Xtreme bar manifold.

IEM Bar Manifold, Inline Valve Only



Valve series	Valve function	# of Stations	Manifold only (NPT)	Manifold only (BSPP)
P2LCZ	4-way	Use Viking Xtreme IEM bar manifold		

Note: P2LCZ 3-way has no IEM manifold


Manifold Accessories / Parts



Valve series	Description	Weight lb (kg)	Kit number
P2LAZ / P2LBZ *	3-way: Blanking kit with mounting screws (2)	0.22 (0.10)	912132BPSXZ
P2LAZ *	4-way: Blanking kit with mounting screws (2)	0.11 (0.05)	9121658063
P2LBZ *	4-way: Blanking kit with mounting screws (2)	0.04 (0.02)	9121594809X

*Note: O-ring for blanking kit included with manifold. For replacement o-rings or fastener bolts, use Viking Xtreme Kits.

22mm Rectangular 3-Pin – Type B Industrial
(Use with Enclosure “B”)



Description	Connector with 6' (2m) cord	Connector
Unlighted	PS2429JBP	PS2429BP
Light – 24VDC	PS2430J79BP*	PS243079BP
Light – 120V/60Hz	PS2430J83BP*	PS243083BP

* LED with surge suppression.

Note: Max ø6.5mm cable size required for connector w/o 6' (2m) cord. IP65 rated when properly installed.

Engineering data:

conductors: 2 poles plus ground; cable range (connector only): 6 to 8mm (0.24 To 0.31 Inch); contact spacing: 11mm

Most popular.

Valve Less Coil

Remove the last 3 digits of the part number of the full valve and add “N” at the end for valve less coil.



Part number example :
P2LBZ592ESNDBBB49
valve with 24VDC solenoid
P2LBZ592ESNDBN valve less coil

Replacement Solenoid Coil



Description	Part number
24VDC coil kit	P2FCB449
110VAC coil kit	P2FCB453

Replacement Solenoid Nut




Description
Solenoid diffuser nut
PS1556



Description
Solenoid vented nut
PS2892P

P2LAZ 3/2 Single & Double Operators – Solenoid

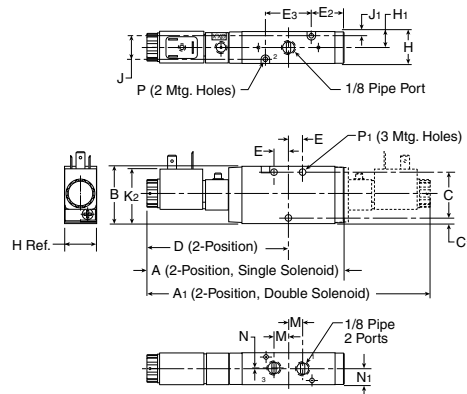


P2LAZ 3/2 (solenoid)

A	A1	B	C	C1
5.35 (136)	7.68 (195)	1.57 (40)	1.26 (32)	.16 (4)
D	E	E2	E3	H
3.84 (97.5)	.39 (10)	.91 (23)	1.26 (32)	.87 (22)
H1	J	J1	K2	M
.43 (11)	.65 (16.5)	.11 (2.75)	1.50 (38)	.39 (10)
N	N1	P	P1	
.02 (.5)	.43 (11)	Ø .12 (Ø 3.1)	Ø .17 (Ø 4.3)	

Inches (mm)

P2LAZ 3/2 Single & Double Operators – IEM Aluminum Bar Manifold

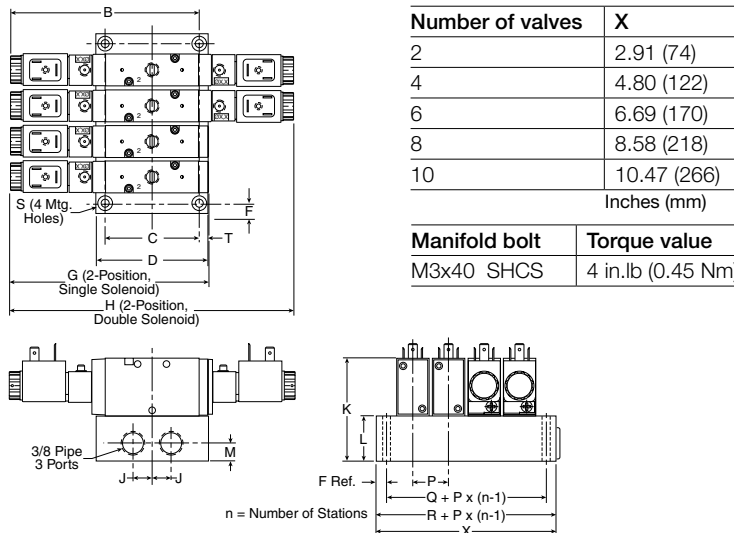

Number of valves	X
2	2.91 (74)
4	4.80 (122)
6	6.69 (170)
8	8.58 (218)
10	10.47 (266)

Inches (mm)

Manifold bolt	Torque value
M3x40 SHCS	4 in.lb (0.45 Nm)


P2LAZ 3/2

IEM Aluminum bar manifold

B	C	D	F	G
5.06 (128.5)	2.44 (62)	2.99 (76)	.28 (7)	5.35 (136)
H	J	K	L	M
7.68 (195)	.51 (13)	2.78 (70.5)	1.20 (30.5)	.47 (12)
P	Q	R	S	T
.94 (24)	1.42 (36)	1.97 (50)	Ø .22 (Ø 5.5)	.88 (7)

Inches (mm)

P2LAZ 5/2 & 5/3 Single & Double Operators – Solenoid

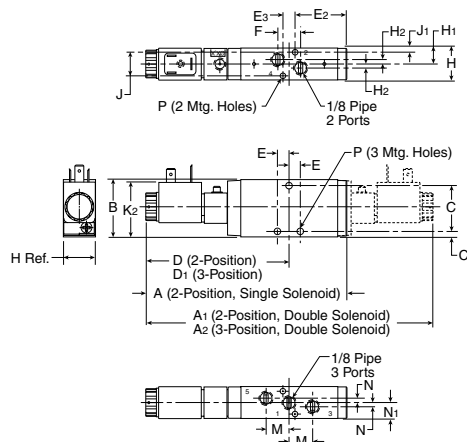


P2LAZ 5/2 & 5/3 (solenoid)

A	A1	A2	B	C
5.47 (139)	7.76 (197)	8.70 (221)	1.57 (40)	1.30 (33)
C1	D	D1	E	E2
.14 (3.5)	3.88 (98.5)	4.35 (110.5)	.31 (8)	1.86 (47.3)
E3	F	H	H1	H2
.33 (8.5)	.63 (16)	.87 (22)	.43 (11)	.12 (3)
J	J1	K2	M	N
.63 (16)	.12 (3)	1.50 (38)	.63 (16)	.12 (3)
N1	P			
.43 (11)	Ø .16 (Ø 4.1)			

Inches (mm)

P2LAZ 5/2 & 5/3 Single & Double Operators – IEM Aluminum Bar Manifold

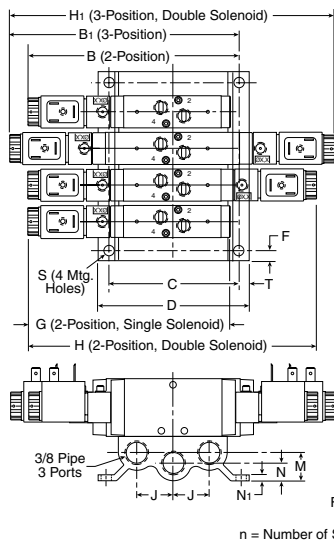

Number of valves	X
2	3.07 (78)
4	4.96 (126)
6	6.85 (174)
8	8.74 (222)
10	10.63 (270)

Inches (mm)

Manifold bolt	Torque value
M4x45 Screw MRX	9 in.lb (0.75 Nm)

**P2LAZ 5/2 & 5/3
 IEM Aluminum bar manifold**

B	B ₁	C	D	F
5.10 (149.5)	6.36 (161.5)	3.46 (88)	4.02 (102)	.28 (7)

G	H	H ₁	J	K
5.47 (139)	7.76 (197)	8.70 (221)	.96 (24.5)	2.76 (70)


L	M	N	N ₁	P
1.18 (30)	.75 (19)	.47 (12)	.16 (4)	.94 (24)

Q	R	S	T
1.57 (40)	2.13 (54)	∅.28 ∅ (7)	.28 (7)

Inches (mm)

D

P2LBZ 3/2 Single & Double Operators – Solenoid

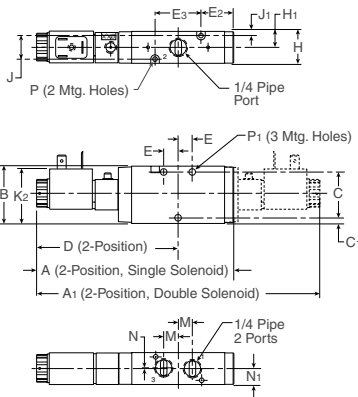

P2LBZ 3/2 (solenoid)

A	A ₁	B	C	C ₁
5.35 (136)	7.68 (195)	1.57 (40)	1.26 (32)	.16 (4)

D	E	E ₂	E ₃	H
3.84 (97.5)	.39 (10)	.91 (23)	1.26 (32)	.87 (22)

H ₁	J	J ₁	K ₂	M
.43 (11)	.65 (16.5)	.11 (2.75)	1.50 (38)	.39 (10)

N	N ₁	P	P ₁
.02 (.5)	.43 (11)	∅.12 ∅ (3.1)	∅.17 ∅ (4.3)

Inches (mm)


Viking Lite

Viking Xtreme

B

ADEX

P2LBZ 3/2 Single & Double Operators – IEM Aluminum Bar Manifold

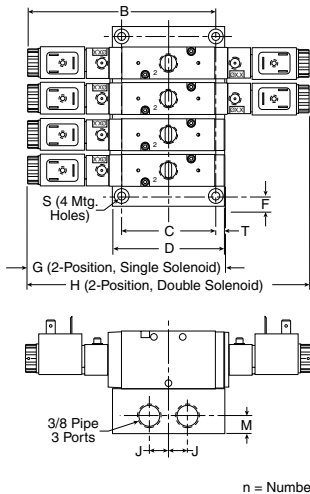

Number of valves	X
2	2.91 (74)
4	4.80 (122)
6	6.69 (170)
8	8.58 (218)
10	10.47 (266)

Inches (mm)

Manifold bolt	Torque value
M3x40 SCHS	4 in.lb (0.45 Nm)

**P2LBZ 3/2
 IEM Aluminum bar manifold**

B	C	D	F	G
5.06 (128.5)	2.44 (62)	2.99 (76)	.28 (7)	5.35 (136)


H	J	K	L	M
7.68 (195)	.51 (13)	2.78 (70.5)	1.20 (30.5)	.47 (12)

P	Q	R	S	T
.94 (24)	1.42 (36)	1.97 (50)	∅.22 ∅ (5.5)	.88 (7)

Inches (mm)

N

P2LBZ 5/2 & 5/3 Single & Double Operators – Solenoid

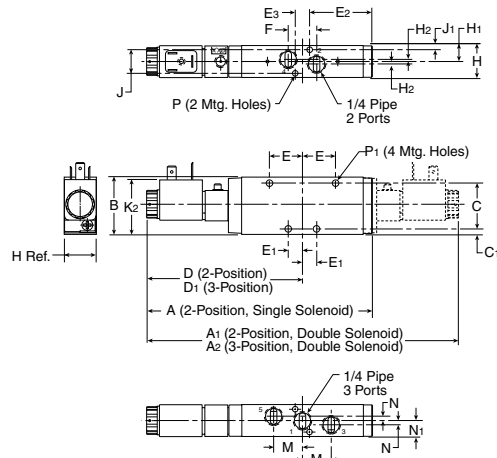


P2LBZ 5/2 & 5/3 (solenoid)

A	A1	A2	B	C
6.14 (156)	8.46 (215)	9.29 (236)	1.57 (40)	1.26 (32)
C1	D	D1	E	E1
.16 (4)	4.23 (107.5)	4.65 (118)	.91 (23)	.39 (10)
E2	E3	F	H	H1
1.14 (29)	.39 (10)	.79 (20)	.87 (22)	.43 (11)
H2	J	J1	K2	M
.06 (1.5)	.65 (16.5)	.11 (2.8)	1.50 (38)	.79 (20)
N	N1	P	P1	
.08 (2)	.43 (11)	Ø .12 (Ø 3.1)	Ø .17 (Ø 4.3)	

Inches (mm)

P2LBZ 5/2 & 5/3 Single & Double Operators – IEM Aluminum Bar Manifold

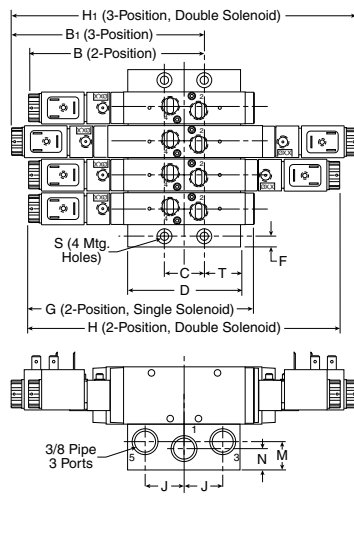


Number of valves	X
2	2.91 (74)
4	4.80 (122)
6	6.69 (170)
8	8.58 (218)
10	10.47 (266)
Inches (mm)	
Manifold bolt	Torque value
M3x40 SCHS	9 in.lb (0.75 Nm)

**P2LBZ 5/2 & 5/3
IEM Aluminum bar manifold**

B	B1	C	D	F
4.43 (112.5)	4.84 (123)	1.04 (26.5)	2.99 (76)	.28 (7)
G	H	H1	J	K
6.14 (156)	8.46 (215)	9.29 (236)	1.02 (26)	2.781 (70.5)
L	M	N	P	Q
1.20 (30.5)	.75 (19)	.57 (14.5)	.94 (24)	1.57 (40)
R	S	T		
1.97 (50)	Ø .22 (Ø 5.5)	.97 (25)		

Inches (mm)

P2LCZ 3/2 Single & Double Operators – Solenoid

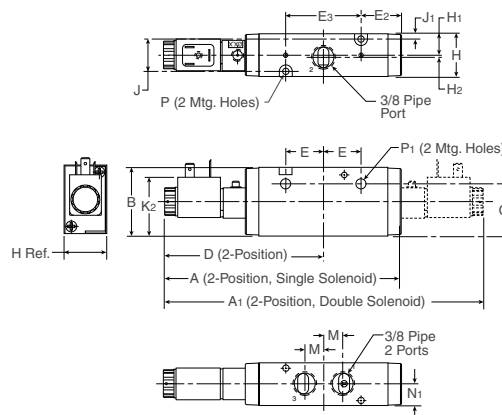


P2LCZ 3/2 (solenoid)

A	A1	B	C	D
6.50 (165)	8.66 (220)	1.89 (48)	1.46 (37)	4.33 (110)
E	E2	E3	H	H1
1.04 (26.5)	1.10 (28)	2.09 (53)	1.18 (30)	.59 (15)
H2	J	J1	K2	M
.06 (1.55)	.91 (23)	.14 (3.5)	1.50 (38)	.53 (13.5)
N1	P	P1		
.59 (15)	Ø .17 (Ø 4.4)	Ø .27 (Ø 6.9)		

Inches (mm)


P2LCZ 5/2 & 5/3 Single & Double Operators – Solenoid

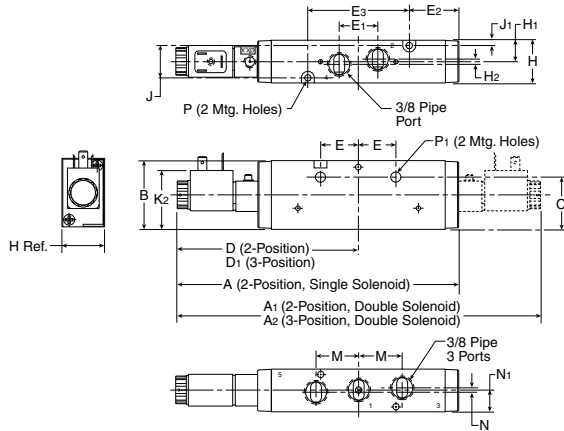

P2LBZ 5/2 & 5/3 (solenoid)

A	A1	A2	B	C
7.68 (195)	9.88 (251)	10.70 (272)	1.89 (48)	1.46 (37)
D	D1	E	E1	E2
4.94 (125.5)	5.35 (136)	1.04 (26.5)	1.06 (27)	1.71 (43.5)
E3	H	H1	H2	J
2.80 (71)	1.18 (30)	.59 (15)	.12 (.3)	.91 (23)
J1	K2	M	N	N1
.14 (3.5)	1.50 (38)	1.18 (30)	.08 (2)	.59 (15)
P	P1			
Ø .17 (4.4)	Ø .27 (6.9)			
Inches (mm)				

P2LCZ 5/2 & 5/3 Single & Double Operators – IEM Aluminum Bar Manifold

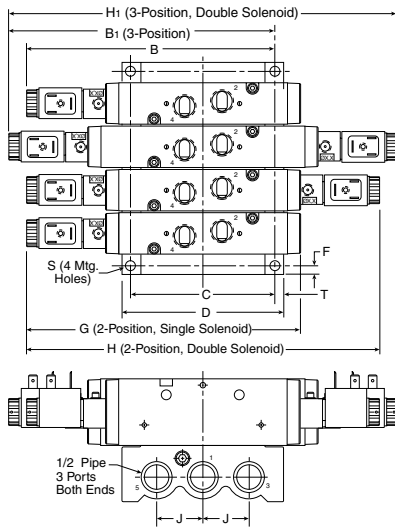


Number of valves	X
2	3.29 (84)
4	5.96 (152)
6	8.44 (215)
8	10.93 (278)
10	13.41 (341)
Inches (mm)	

Manifold bolt	Torque value
M4x50 SCHS	15 in.lb (2.0 Nm)

P2LCZ 5/2 & 5/3 IEM Aluminum bar manifold

C	D	F	G	H
3.97 (101)	4.41 (112)	.24 (6)	7.68 (195)	9.88 (251)
H1	J	K	L	P
10.70 (272)	1.26 (32)	3.43 (87)	1.54 (39)	1.24 (31.5)
Q	R	S	T	
1.77 (45)	2.24 (57)	Ø .26 (6.5)	.24 (6)	
Inches (mm)				

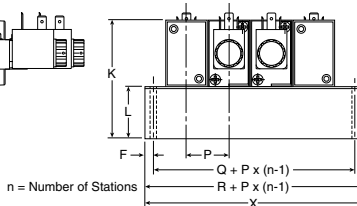

D

Viking Lite

Viking Xtreme

B

ADEX

N



Air Control Valves

P2LAX – 1/8"


P2LBX – 1/4"

P2LCX – 3/8"

P2LDX – 1/2"

Section D

www.parker.com/pneu/vikingx

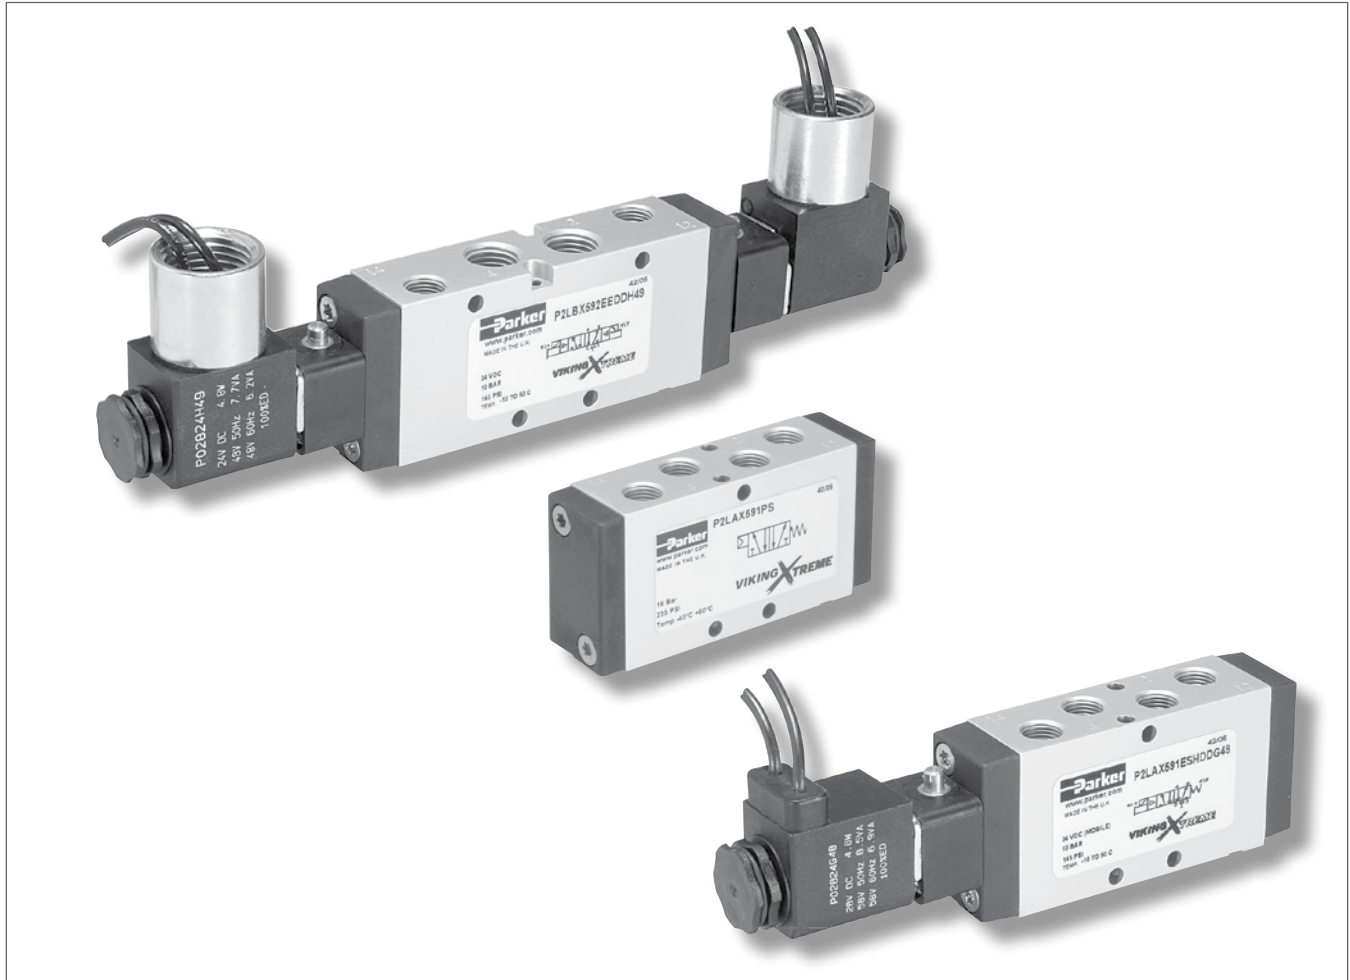

D

Viking Lite

Viking Xtreme

B

ADEX

N


Basic Valve Functions	D12	ATEX Complete Valve & Solenoid Pilot Assemblies	D21
Basic Valve Features	D13	22mm Solenoid Pilot Operators & Coils, ATEX	D22-D23
Normal Operation		Intrinsically Safe & Hazardous Duty Solenoid	D24
Solenoid Common Part Numbers	D14-D15	Technical Data	D25
Extreme Operation		Electrical Connectors / Accessories	D26-D27
Solenoid Common Part Numbers	D16-D17	DOT Fittings	D28-D29
Solenoid Valve Model Number Index	D18	Dimensions	D30-D38
Remote Air Pilot Common Part Numbers	D19		
IEM Bar Manifolds, Assemblies & Accessories	D20		

BOLD ITEMS ARE MOST POPULAR.



Single solenoid

3-Way, 2-Position NC (NNP)




Normally Closed:

De-energized position – Solenoid #12 de-energized. Pressure at inlet port 1 blocked, outlet port 2 connected to exhaust port 3.

Energized position – Solenoid #12 energized. Pressure at inlet port 1 connected to outlet port 2, exhaust port 3 is blocked.

Double solenoid

3-Way, 2-Position




Solenoid operator #12 energized last. Pressure at inlet port 1 connected to outlet port 2, exhaust port 3 is blocked.

Solenoid operator #10 energized last. Pressure at inlet port 1 blocked, outlet port 2 connected to exhaust port 3.

Single solenoid

Single pressure at inlet port 1:




De-energized position – Solenoid operator #14 de-energized. Pressure at inlet port 1 connected to outlet port 2. Outlet port 4 connected to exhaust port 5.

Energized position – Solenoid operator #14 energized. Pressure at inlet port 1 connected to outlet port 4. Outlet port 2 connected to exhaust port 3.

Double solenoid


Single pressure at inlet port 1:



Solenoid operator #14 energized last. Pressure at inlet port 1 connected to outlet port 4. Outlet port 2 connected to exhaust port 3.

Solenoid operator #12 energized last. Pressure at inlet port 1 connected to outlet port 2. Outlet port 4 connected to exhaust port 5.

Double solenoid 3-position

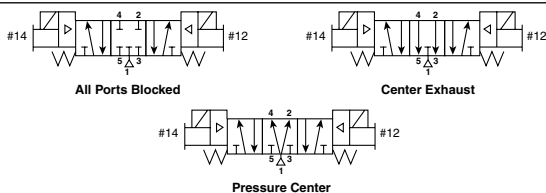

With #12 operator energized – inlet port 1 connected to cylinder port 2, cylinder port 4 connected to exhaust port 5.

With #14 operator energized – inlet port 1 connected to cylinder port 4, cylinder port 2 connected to exhaust port 3.

All Ports Blocked

All ports blocked in the center position.

Center Exhaust


Cylinder ports 2 and 4 connected to exhaust ports 3 and 5 in center position. Port 1 is blocked.

Pressure Center

Pressure port 1 connected to cylinder ports 2 and 4, and exhaust ports 3 and 5 blocked in center position.

Single remote pilot

3-Way, 2-Position NC (NNP)




Normally Closed:

Normal position – Pressure at inlet port 1 blocked, outlet port 2 connected to exhaust port 3.

Operated position – Maintained air signal at port 12. Pressure at inlet port 1 connected to outlet port 2, exhaust port 3 is blocked.

Double solenoid

3-Way, 2-Position




Momentary air signal at port 12 last. Pressure at inlet port 1 connected to outlet port 2, exhaust port 3 is blocked.

Momentary air signal at port 10 last. Pressure at inlet port 1 blocked, outlet port 2 connected to exhaust port 3.

Single remote pilot

Single pressure at inlet port 1:




Normal position – Pressure at inlet port 1 connected to outlet port 2. Outlet port 4 connected to exhaust port 5.

Operated position – Maintained air signal at port 14. Pressure at inlet port 1 connected to outlet port 4. Outlet port 2 connected to exhaust port 3.

Double remote pilot


Single pressure at inlet port 1:



Momentary air signal at port 14 last. Pressure at inlet port 1 connected to outlet port 4. Outlet port 2 connected to exhaust port 3.

Momentary air signal at port 12 last. Pressure at inlet port 1 connected to outlet port 2. Outlet port 4 connected to exhaust port 5.

Double remote pilot 3-position

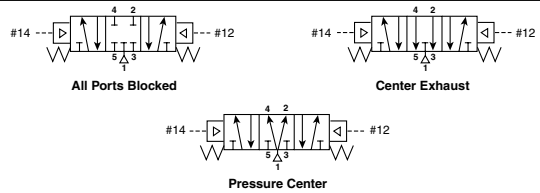

With #12 operator signaled – inlet port 1 connected to cylinder port 2, cylinder port 4 connected to exhaust port 5.

With #14 operator signaled – inlet port 1 connected to cylinder port 4, cylinder port 2 connected to exhaust port 3.

All Ports Blocked

All ports blocked in the center position.

Center Exhaust

Cylinder ports 2 and 4 connected to exhaust ports 3 and 5 in center position. Port 1 is blocked.

Pressure Center

Pressure port 1 connected to cylinder ports 2 and 4, and exhaust ports 3 and 5 blocked in center position.

D

Viking
Life

Viking
Xtreme

B

ADEX

N

Specifications

P2LAX	P2LAX: 0.7 Cv
P2LBX	P2LBX: 1.3 Cv
P2LCX	P2LCX: 2.5 Cv
P2LDX	P2LDX: 2.7 Cv


Materials of Construction

- Valve Body: Anodized Aluminum
- Spool: Aluminum & Nitrile Rubber
- End Caps: Anodized Aluminum
- Coils: Thermoplastic
- Fasteners: Stainless Steel

Operating Temperature

- Normal: 14°F to 122°F
(-10°C to 50°C)
- Xtreme: -40°F to 140°F
(-40°C to 60°C)

Operating Pressure

- Normal: Vacuum to 145 PSIG
(Vacuum to 10 bar)
- Xtreme: 
 - (P2LAX & P2LBX) Vacuum to 232 PSIG
(Vacuum to 16 bar)
 - (P2LCX & P2LDX) Vacuum to 174 PSIG
(Vacuum to 12 bar)

Ports

P2LAX	P2LAX: 1/8" NPT & BSPP
P2LBX	P2LBX: 1/4" NPT & BSPP
P2LCX	P2LCX: 3/8" NPT & BSPP
P2LDX	P2LDX: 1/2" NPT & BSPP

Compliance / Approval

- IP65 Rated
- ATEX Option Available

Solenoids

- 2.5 to 7.3 Watt – Conduit, Grommet, 22mm & 30mm 3-Pin (DIN 43650), Hazardous Duty, Intrinsically Safe
- 12VDC to 240VAC

Mounting


- Inline
- IEM Aluminum Bar

Mobile Applications

- Viking Xtreme Tested to +5g Shock and Vibration
- Solenoids Operate with Wide Voltage Tolerance Bands
- Corrosion Resistant Design

Over Molded Spool

- Aluminum spool with nitrile rubber coating ground to exact size for optimum performance
- Precision ground for maximum performance
- Wide operating temperature range
 - Low temperature to -40°

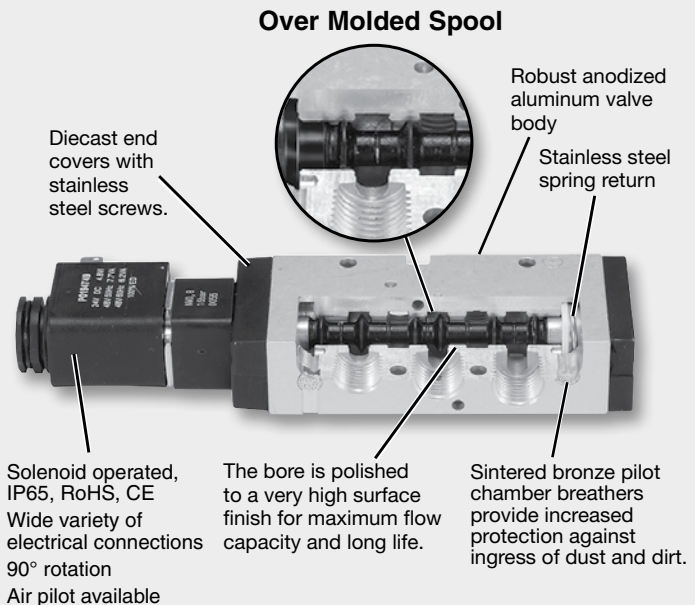

D

Viking
Life




Viking
Xtreme

B

ADEX




N

Single Solenoid, 3-way, 2-position, Normal Operating Pressure / Temperature

Solenoid	Port size (NPT)	Cv	Valve type	Response time (msec)	Weight lb (kg)	Voltage	Part number
  22mm DIN P2LAX 22mm DIN Shown	1/8"	0.7	P2LAX	18 / 40	0.84 (0.38)	24VDC 120VAC	P2LAX391ESNDDDB49 P2LAX391ESNDDDB53
	1/4"	1.3	P2LBX	18 / 45	0.84 (0.38)	24VDC 120VAC	P2LBX392ESNDDDB49 P2LBX392ESNDDDB53
	3/8"	2.5	P2LCX	25 / 75	1.72 (0.78)	24VDC 120VAC	P2LCX393ESNDDDB49 P2LCX393ESNDDDB53
	1/2"	2.7	P2LDX	25 / 75	1.72 (0.78)	24VDC 120VAC	P2LDX394ESNDDDB49 P2LDX394ESNDDDB53
	1/8"	0.7	P2LAX	18 / 40	0.84 (0.38)	24VDC 120VAC	P2LAX391ESNDDG49 P2LAX391ESNDDG53
	1/4"	1.3	P2LBX	18 / 45	0.84 (0.38)	24VDC 120VAC	P2LBX392ESNDDG49 P2LBX392ESNDDG53
 18" Grommet P2LAX 18" Grommet Shown	3/8"	2.5	P2LCX	25 / 75	1.72 (0.78)	24VDC 120VAC	P2LCX393ESNDDG49 P2LCX393ESNDDG53
	1/2"	2.7	P2LDX	25 / 75	1.72 (0.78)	24VDC 120VAC	P2LDX394ESNDDG49 P2LDX394ESNDDG53

Notes: Above valves are rated for an operating temperature from 14°F to 122°F (-10°C to 50°C). See model code matrix for additional options.
 Response time: Actuate to 90% pressure / return to exhaust to 10% of supply pressure. 93 PSIG (6.3 bar) / temperature 68°F (20°C).

Single Solenoid, 4-way, 2-position, Normal Operating Pressure / Temperature

Solenoid	Port size (NPT)	Cv	Valve type	Response time (msec)	Weight lb (kg)	Voltage	Part number
  22mm DIN P2LBX 22mm DIN Shown	1/8"	0.7	P2LAX	15 / 35	0.49 (0.22)	24VDC 120VAC	P2LAX591ESNDDDB49 P2LAX591ESNDDDB53
	1/4"	1.3	P2LBX	18 / 45	0.84 (0.38)	24VDC 120VAC	P2LBX592ESNDDDB49 P2LBX592ESNDDDB53
	3/8"	2.5	P2LCX	27 / 75	1.68 (0.76)	24VDC 120VAC	P2LCX593ESNDDDB49 P2LCX593ESNDDDB53
	1/2"	2.7	P2LDX	25 / 75	1.68 (0.76)	24VDC 120VAC	P2LDX594ESNDDDB49 P2LDX594ESNDDDB53
	1/8"	0.7	P2LAX	15 / 35	0.49 (0.22)	24VDC 120VAC	P2LAX591ESNDDG49 P2LAX591ESNDDG53
	1/4"	1.3	P2LBX	18 / 45	0.84 (0.38)	24VDC 120VAC	P2LBX592ESNDDG49 P2LBX592ESNDDG53
 18" Grommet P2LAX 18" Grommet Shown	3/8"	2.5	P2LCX	27 / 75	1.68 (0.76)	24VDC 120VAC	P2LCX593ESNDDG49 P2LCX593ESNDDG53
	1/2"	2.7	P2LDX	25 / 75	1.68 (0.76)	24VDC 120VAC	P2LDX594ESNDDG49 P2LDX594ESNDDG53




Notes: Above valves are rated for an operating temperature from 14°F to 122°F (-10°C to 50°C). See model code matrix for additional options.
 Response time: Actuate to 90% pressure / return to exhaust to 10% of supply pressure. 93 PSIG (6.3 bar) / temperature 68°F (20°C).

BOLD ITEMS ARE MOST POPULAR.






D
 Viking
 Lite
 Viking
 Xtreme
 B
 ADEX
 N

Double Solenoid, 4-way, 2-position, Normal Operating Pressure / Temperature

Solenoid	Port size (NPT)	Cv	Valve type	Response time (msec)	Weight lb (kg)	Voltage	Part number
  22mm DIN P2LBX 22mm DIN Shown	1/8"	0.7	P2LAX	10 / 10	0.60 (0.27)	24VDC 120VAC	P2LAX591EENDDDB49 P2LAX591EENDDDB53
	1/4"	1.3	P2LBX	12 / 12	0.93 (0.42)	24VDC 120VAC	P2LBX592EENDDDB49 P2LBX592EENDDDB53
	3/8"	2.5	P2LCX	17 / 17	1.78 (0.81)	24VDC 120VAC	P2LCX593EENDDDB49 P2LCX593EENDDDB53
	1/2"	2.7	P2LDX	17 / 17	1.78 (0.81)	24VDC 120VAC	P2LDX594EENDDDB49 P2LDX594EENDDDB53
 18" Grommet P2LAX 18" Grommet Shown	1/8"	0.7	P2LAX	10 / 10	0.60 (0.27)	24VDC 120VAC	P2LAX591EENDDG49 P2LAX591EENDDG53
	1/4"	1.3	P2LBX	12 / 12	0.93 (0.42)	24VDC 120VAC	P2LBX592EENDDG49 P2LBX592EENDDG53
	3/8"	2.5	P2LCX	17 / 17	1.78 (0.81)	24VDC 120VAC	P2LCX593EENDDG49 P2LCX593EENDDG53
	1/2"	2.7	P2LDX	17 / 17	1.78 (0.81)	24VDC 120VAC	P2LDX594EENDDG49 P2LDX594EENDDG53

Notes: Above valves are rated for an operating temperature from 14°F to 122°F (-10°C to 50°C). See model code matrix for additional options.
 Response time: Actuate to 90% pressure / return to exhaust to 10% of supply pressure. 93 PSIG (6.3 bar) / temperature 68°F (20°C).

Double Solenoid, 4-way, 3-position All Ports Blocked, 3-position Center Exhaust, Normal Operating Pressure / Temperature





Solenoid	Port size (NPT)	Cv	Valve type	Response time (msec)	Weight lb (kg)	Voltage	Part number	
							All ports blocked	Center exhaust
  22mm DIN P2LBX 22mm DIN Shown	1/8"	0.5	P2LAX	18 / 40	0.62 (0.28)	24VDC 120VAC	P2LAX691EENDDDB49 P2LAX691EENDDDB53	P2LAX891EENDDDB49 P2LAX891EENDDDB53
	1/4"	0.9	P2LBX	22 / 55	0.97 (0.44)	24VDC 120VAC	P2LBX692EENDDDB49 P2LBX692EENDDDB53	P2LBX892EENDDDB49 P2LBX892EENDDDB53
	3/8"	1.8	P2LCX	30 / 90	2.45 (1.11)	24VDC 120VAC	P2LCX693EENDDDB49 P2LCX693EENDDDB53	P2LCX893EENDDDB49 P2LCX893EENDDDB53
	1/2"	1.9	P2LDX	30 / 90	2.45 (1.11)	24VDC 120VAC	P2LDX694EENDDDB49 P2LDX694EENDDDB53	P2LDX894EENDDDB49 P2LDX894EENDDDB53
 18" Grommet P2LBX 18" Grommet Shown	1/8"	0.5	P2LAX	18 / 40	0.62 (0.28)	24VDC 120VAC	P2LAX691EENDDG49 P2LAX691EENDDG53	P2LAX891EENDDG49 P2LAX891EENDDG53
	1/4"	0.9	P2LBX	22 / 55	0.97 (0.44)	24VDC 120VAC	P2LBX692EENDDG49 P2LBX692EENDDG53	P2LBX892EENDDG49 P2LBX892EENDDG53
	3/8"	1.8	P2LCX	30 / 90	2.45 (1.11)	24VDC 120VAC	P2LCX693EENDDG49 P2LCX693EENDDG53	P2LCX893EENDDG49 P2LCX893EENDDG53
	1/2"	1.9	P2LDX	30 / 90	2.45 (1.11)	24VDC 120VAC	P2LDX694EENDDG49 P2LDX694EENDDG53	P2LDX894EENDDG49 P2LDX894EENDDG53

Notes: Above valves are rated for an operating temperature from 14°F to 122°F (-10°C to 50°C). See model code matrix for additional options.
 Response time: Actuate to 90% pressure / return to exhaust to 10% of supply pressure. 93 PSIG (6.3 bar) / temperature 68°F (20°C).

BOLD ITEMS ARE MOST POPULAR.







Single Solenoid, 3-way, 2-position, Xtreme Operating Pressure / Temperature

Solenoid	Port size (NPT)	Cv	Valve type	Response time (msec)	Weight lb (kg)	Voltage	Part number
  22mm DIN P2LAX 22mm DIN Shown	1/8"	0.7	P2LAX	15 / 45	0.84 (0.38)	12VDC	P2LAX391ESHDDDB47
						24VDC	P2LAX391ESHDDDB48
	1/4"	1.3	P2LBX	25 / 65	0.84 (0.38)	12VDC	P2LBX392ESHDDDB47
						24VDC	P2LBX392ESHDDDB48
	3/8"	2.5	P2LCX	25 / 85	1.01 (0.46)	12VDC	P2LCX393ESHDDDB47
						24VDC	P2LCX393ESHDDDB48
	1/2"	2.7	P2LDX	25 / 85	1.01 (0.46)	12VDC	P2LDX394ESHDDDB47
						24VDC	P2LDX394ESHDDDB48
  18" Grommet P2LBX 18" Grommet Shown	1/8"	0.7	P2LAX	15 / 45	0.84 (0.38)	12VDC	P2LAX391ESHDDG47
						24VDC	P2LAX391ESHDDG48
	1/4"	1.3	P2LBX	25 / 65	0.84 (0.38)	12VDC	P2LBX392ESHDDG47
						24VDC	P2LBX392ESHDDG48
	3/8"	2.5	P2LCX	25 / 85	1.01 (0.46)	12VDC	P2LCX393ESHDDG47
						24VDC	P2LCX393ESHDDG48
	1/2"	2.7	P2LDX	25 / 85	1.01 (0.46)	12VDC	P2LDX394ESHDDG47
						24VDC	P2LDX394ESHDDG48

Notes: Above valves have Mobile Rate Coils and are rated for an operating temperature from -40°F to 140°F (-40°C to 60°C). See model code matrix for additional options.
 Response time: Actuate to 90% pressure / return to exhaust to 10% of supply pressure. 93 PSIG (6.3 bar) / temperature 68°F (20°C).

Single Solenoid, 4-way, 2-position, Xtreme Operating Pressure / Temperature

Solenoid	Port size (NPT)	Cv	Valve type	Response time (msec)	Weight lb (kg)	Voltage	Part number
  22mm DIN P2LAX 22mm DIN Shown	1/8"	0.7	P2LAX	15 / 45	0.84 (0.38)	12VDC	P2LAX591ESHDDDB47
						24VDC	P2LAX591ESHDDDB48
	1/4"	1.3	P2LBX	20 / 55	0.84 (0.38)	12VDC	P2LBX592ESHDDDB47
						24VDC	P2LBX592ESHDDDB48
	3/8"	2.5	P2LCX	25 / 85	1.01 (0.46)	12VDC	P2LCX593ESHDDDB47
						24VDC	P2LCX593ESHDDDB48
	1/2"	2.7	P2LDX	25 / 85	1.01 (0.46)	12VDC	P2LDX594ESHDDDB47
						24VDC	P2LDX594ESHDDDB48
  18" Grommet P2LAX 18" Grommet Shown	1/8"	0.7	P2LAX	15 / 45	0.84 (0.38)	12VDC	P2LAX591ESHDDG47
						24VDC	P2LAX591ESHDDG48
	1/4"	1.3	P2LBX	25 / 65	0.84 (0.38)	12VDC	P2LBX592ESHDDG47
						24VDC	P2LBX592ESHDDG48
	3/8"	2.5	P2LCX	28 / 85	1.01 (0.46)	12VDC	P2LCX593ESHDDG47
						24VDC	P2LCX593ESHDDG48
	1/2"	2.7	P2LDX	25 / 85	1.01 (0.46)	12VDC	P2LDX594ESHDDG47
						24VDC	P2LDX594ESHDDG48




Notes: Above valves have Mobile Rate Coils and are rated for an operating temperature from -40°F to 140°F (-40°C to 60°C). See model code matrix for additional options.
 Response time: Actuate to 90% pressure / return to exhaust to 10% of supply pressure. 93 PSIG (6.3 bar) / temperature 68°F (20°C).

BOLD ITEMS ARE MOST POPULAR.






D
 Viking
 Lite
 Viking
 Xtreme
 B
 ADEX
 N

Double Solenoid, 4-way, 2-position, Xtreme Operating Pressure / Temperature

Solenoid	Port size (NPT)	Cv	Valve type	Response time (msec)	Weight lb (kg)	Voltage	Part number
  22mm DIN P2LBX 22mm DIN Shown	1/8"	0.7	P2LAX	11 / 11	0.60 (0.27)	12VDC	P2LAX591EEHDDDB47
						24VDC	P2LAX591EEHDDDB48
	1/4"	1.3	P2LBX	13 / 13	0.93 (0.42)	12VDC	P2LBX592EEHDDDB47
						24VDC	P2LBX592EEHDDDB48
	3/8"	2.5	P2LCX	18 / 18	1.06 (0.48)	12VDC	P2LCX593EEHDDDB47
						24VDC	P2LCX593EEHDDDB48
1/2"	2.7	P2LDX	18 / 18	1.06 (0.48)	12VDC	P2LDX594EEHDDDB47	
					24VDC	P2LDX594EEHDDDB48	
 18" Grommet P2LAX 18" Grommet Shown	1/8"	0.7	P2LAX	11 / 11	0.60 (0.27)	12VDC	P2LAX591EEHDDG47
						24VDC	P2LAX591EEHDDG48
	1/4"	1.3	P2LBX	13 / 13	0.93 (0.42)	12VDC	P2LBX592EEHDDG47
						24VDC	P2LBX592EEHDDG48
	3/8"	2.5	P2LCX	18 / 18	1.06 (0.48)	12VDC	P2LCX593EEHDDG47
						24VDC	P2LCX593EEHDDG48
1/2"	2.7	P2LDX	18 / 18	1.06 (0.48)	12VDC	P2LDX594EEHDDG47	
					24VDC	P2LDX594EEHDDG48	

Notes: Above valves have Mobile Rate Coils and are rated for an operating temperature from -40°F to 140°F (-40°C to 60°C). See model code matrix for additional options.
 Response time: Actuate to 90% pressure / return to exhaust to 10% of supply pressure. 93 PSIG (6.3 bar) / temperature 68°F (20°C).

Double Solenoid, 4-way, 3-position All Ports Blocked, 3-position Center Exhaust, Xtreme Operating Pressure / Temperature

Solenoid	Port size	Cv	Valve type (NPT)	Response time (msec)	Weight lb (kg)	Voltage	Part number	
							All ports blocked	Center exhaust
  22mm DIN P2LBX 22mm DIN Shown	1/8"	0.5	P2LAX	18 / 40	0.62 (0.28)	12VDC 24VDC	P2LAX691EEHDDDB47	P2LAX891EEHDDDB47
							P2LAX691EEHDDDB48	P2LAX891EEHDDDB48
	1/4"	0.9	P2LBX	22 / 55	0.97 (0.44)	12VDC 24VDC	P2LBX692EEHDDDB47	P2LBX892EEHDDDB47
							P2LBX692EEHDDDB48	P2LBX892EEHDDDB48
3/8"	1.8	P2LCX	30 / 90	2.45 (1.11)	12VDC 24VDC	P2LCX693EEHDDDB47	P2LCX893EEHDDDB47	
						P2LCX693EEHDDDB48	P2LCX893EEHDDDB48	
1/2"	1.9	P2LDX	30 / 90	2.45 (1.11)	12VDC 24VDC	P2LDX694EEHDDDB47	P2LDX894EEHDDDB47	
						P2LDX694EEHDDDB48	P2LDX894EEHDDDB48	
 18" Grommet P2LBX 18" Grommet Shown	1/8"	0.5	P2LAX	18 / 40	0.62 (0.28)	12VDC 24VDC	P2LAX691EEHDDG47	P2LAX891EEHDDG47
							P2LAX691EEHDDG48	P2LAX891EEHDDG48
	1/4"	0.9	P2LBX	22 / 55	0.97 (0.44)	12VDC 24VDC	P2LBX692EEHDDG47	P2LBX892EEHDDG47
							P2LBX692EEHDDG48	P2LBX892EEHDDG48
3/8"	1.8	P2LCX	30 / 90	2.45 (1.11)	12VDC 24VDC	P2LCX693EEHDDG47	P2LCX893EEHDDG47	
						P2LCX693EEHDDG48	P2LCX893EEHDDG48	
1/2"	1.9	P2LDX	30 / 90	2.45 (1.11)	12VDC 24VDC	P2LDX694EEHDDG47	P2LDX894EEHDDG47	
						P2LDX694EEHDDG48	P2LDX894EEHDDG48	

Notes: Above valves have Mobile Rate Coils and are rated for an operating temperature from -40°F to 140°F (-40°C to 60°C). See model code matrix for additional options.
 Response time: Actuate to 90% pressure / return to exhaust to 10% of supply pressure. 93 PSIG (6.3 bar) / temperature 68°F (20°C).

BOLD ITEMS ARE MOST POPULAR.



Single & Double Solenoid Operated Valves

P2L A X 5 91 E S H D D G 49

Valve size	
1/8"	A
1/4"	B
3/8"	C
1/2"	D

Series	
Viking Xtreme	X

Voltage / frequency	
42	24VAC
45	12VDC
47*	12 VDC mobile
48*	24 VDC mobile
49	24VDC
53	120VAC
57	240VAC
Blank	Valve less coil

* Only available with enclosures "A", "B" & "G". Additional voltages are available upon request. Contact customer support for more information.

Valve type / function	
<i>Internal pilot supply to solenoid*</i>	
3/2 NC - 2-position	3
5/2 2-position	5
5/3 3-position, APB	6
5/3 3-position, PC	7
5/3 3-position, CE	8
<i>External pilot supply to the solenoids through ports #12 & #14</i>	
3/2 NC - 2-position	L
5/2 2-position	N
5/3 3-position, APB	P
5/3 3-position, PC	Q
5/3 3-position, CE	R

* Size A & B solenoid valves can be field converted from internal to external pilot. See page D48 for details.

Enclosures / lead length	
A	30mm square 3-pin – ISO 4400 Form A (male only)
B	22mm rectangular 3-pin – type B industrial (male only)
E*	Intrinsically safe, FM / CSA
F†	Hazardous duty, FM / CSA
G	Grommet - 18" leads
H	1/2" NPT conduit - 18" leads
N	Solenoid pilot operator less coil

* Only available with voltage code "49" & override option "A", valve type "N" Only.

† Valve Type "N" Only.

Main port thread	
G1/8 (P2LA)	11
G1/4 (P2LB)	12
G1/4 (P2LB) NAMUR Mount	1N*
G3/8 (P2LC)	13
G1/2 (P2LD)	14
1/8" NPT (P2LA)	91
1/4" NPT (P2LB)	92
1/4" NPT (P2LB) NAMUR Mount	9N*
3/8" NPT (P2LC)	93
1/2" NPT (P2LD)	94

* NAMUR mount available for 5/2, 2-position only.

Overrides	
A	No override
C*	Flush - locking
D	Extended non-locking

* Override for valve type N only.

Solenoid pilot type	
D	Pilot exhaust vented
N	Tapped pilot exhaust (M5)

12 End operator	
Double solenoid operated valve	E
Single solenoid spring return	S*

* Not available with 3-position valves.

Valve type	
N	Normal vacuum to 145 PSIG (10 bar) 14°F to 122°F (-10°C to 50°C)
H*	Xtreme vacuum to 232 PSIG (16 bar) -40°F to 140° F (-40°C to 60°C)


* P2LC and P2LD solenoid operated valves have a maximum pressure rating of 175 PSIG (12 bar)

D
 Viking Lite
 Viking Xtreme
 B
 ADEX
 N

BOLD ITEMS ARE MOST POPULAR.




Single Remote Pilot, 3-way, 2-position, Xtreme Operating Pressure / Temperature



P2LAX Shown

Port size (NPT)	Cv	Response time (msec)	Weight lb (kg)	Valve type	Part number
1/8"	0.7	15 / 45	0.68 (0.31)	P2LAX	P2LAX391PS
1/4"	1.3	25 / 65	0.68 (0.31)	P2LBX	P2LBX392PS
3/8"	2.5	25 / 65	0.88 (0.40)	P2LCX	P2LCX393PS
1/2"	2.7	25 / 65	0.88 (0.40)	P2LDX	P2LDX394PS

Single Remote Pilot, 4-way, 2-position, Xtreme Operating Pressure / Temperature



P2LAX Shown

Port size (NPT)	Cv	Response time (msec)	Weight lb (kg)	Valve type	Part number
1/8"	0.7	15 / 45	0.33 (0.15)	P2LAX	P2LAX591PS
1/4"	1.3	20 / 55	0.68 (0.31)	P2LBX	P2LBX592PS
3/8"	2.5	25 / 85	0.90 (0.41)	P2LCX	P2LCX593PS
1/2"	2.7	25 / 85	0.90 (0.41)	P2LDX	P2LDX594PS

Double Remote Pilot, 4-way, 2-position, Xtreme Operating Pressure / Temperature



P2LBX Shown

Port size (NPT)	Cv	Response time (msec)	Weight lb (kg)	Valve type	Part number
1/8"	0.7	11 / 11	0.33 (0.15)	P2LAX	P2LAX591PP
1/4"	1.3	13 / 13	0.68 (0.31)	P2LBX	P2LBX592PP
3/8"	2.5	18 / 18	0.90 (0.41)	P2LCX	P2LCX593PP
1/2"	2.7	18 / 18	0.90 (0.41)	P2LDX	P2LDX594PP

Double Remote Pilot, 4-way, 3-position All Ports Blocked, 3-position Center Exhaust, Xtreme Operating Pressure / Temperature



P2LBX Shown

Port size (NPT)	Cv	Response time (msec)	Weight lb (kg)	Valve type	Part number	
					All ports blocked	Center exhaust
1/8"	0.5	18 / 50	0.31 (0.14)	P2LAX	P2LAX691PP	P2LAX891PP
1/4"	0.9	25 / 65	0.73 (0.33)	P2LBX	P2LBX692PP	P2LBX892PP
3/8"	1.8	30 / 90	0.93 (0.42)	P2LCX	P2LCX693PP	P2LCX893PP
1/2"	1.9	30 / 90	0.93 (0.42)	P2LDX	P2LDX694PP	P2LDX894PP

Notes: Above valves are rated for an operating temperature from -40°F to 142°F (-40°C to 60°C). See model code matrix for additional options.
 Response time: Actuate to 90% pressure / return to exhaust to 10% of supply pressure. 93 PSIG (6.3 bar) / temperature 68°F (20°C).

Remote Air Pilot Operated Valves

P2 L A X 5 91 PS

Valve size	
1/8"	A
1/4"	B
3/8"	C*
1/2"	D*

* P2LCX and P2LDX manual & remote air pilot valves have a maximum pressure rating of 175 PSIG (12 bar).

Valve type / function	
Internal pilot supply to solenoid	
3/2 NC - 2-position	3
5/2 2-position	5
5/3 3-position, APB	6
5/3 3-position, PC	7
5/3 3-position, CE	8

Operators / return	
PP	Double remote pilot
PS*	Single remote pilot, spring return

* Not available with 3-position valves.

Main port thread	
11	G1/8 (P2LA)
12	G1/4 (P2LB)
13	G3/8 (P2LC)
14	G1/2 (P2LD)
91	1/8" NPT (P2LA)
92	1/4" NPT (P2LB)
93	3/8" NPT (P2LC)
94	1/2" NPT (P2LD)

Note: NAMUR Mount for P2LBX is available upon request.

BOLD ITEMS ARE MOST POPULAR.



IEM Bar Manifold, Viking Xtreme Solenoid / Remote Pilot Valves



Valve series	Valve function	## -Stations	Manifold only (NPT)	Manifold only (BSPP)
P2LAX*	3-way	02 - 12	P2LAXGAXG##NP	P2LAXGAXG##GP
P2LAX*	4-way	02 - 12	P2LAXMAXN##NP	P2LAXMAXN##GP
P2LBX*	3-way	02 - 12	P2LBXGAXG##NP	P2LBXGAXG##GP
P2LBX*	4-way	02 - 12	P2LBXMAXN##NP	P2LBXMAXN##GP
P2LCX	3-way / 4-way	02 - 12	P2LCXMAXN##NP	P2LCXMAXN##GP

Kits include: (1) manifold, valve hold down bolts and o-rings. Replace ## with number of valve stations.
 * 30mm solenoid coil option "A" not available on IEM bar manifold P2LAX or P2LBX.

IEM Bar Manifold Add-A-Fold Assembly (Viking Xtreme Solenoid / Remote Pilot Valves Only)



Valve series	Valve function	## -Stations	Manifold only (NPT)	Manifold only (BSPP)
P2LAX*	3-way	02 - 12	AAPL2AXGAXG##NP	AAPL2AXGAXG##GP
P2LAX*	4-way	02 - 12	AAPL2AXMAXN##NP	AAPL2AXMAXN##GP
P2LBX*	3-way	02 - 12	AAPL2BXGAXG##NP	AAPL2BXGAXG##GP
P2LBX*	4-way	02 - 12	AAPL2BXMAXN##NP	AAPL2BXMAXN##GP
P2LCX	3-way / 4-way	02 - 12	AAPL2CXMAXN##NP	AAPL2CXMAXN##GP

Kits include: (1) manifold, valve hold down bolts, o-rings and assembly. Replace ## with number of valve stations.
 * 30mm solenoid coil option "A" not available on IEM bar manifold P2LAX or P2LBX.


How to Order: 1. List Add-A-Fold assembly part number as line item 1

2. List the desired valves series part number in subsequent line items after the Add-A-Fold Assembly part number to complete the ordering code. Include all valves and blanking kits required. The left most station is station # 1 looking at the #12 end of the manifold.


Example: B3, 4-way manifold with station #1 blanked off with valves assembled

Line	Qty	Part number	Comment
1	1	AAPL2BXMAXN02NP	Add-A-Fold Assembly, 2-station IEM bar manifold
2	2	P2LBX591ESNDDDB49	4-way, Station 1, 2

Blanking Plate



Type	Kit number
P2LAX 4-way	9121658063
P2LBX 4-way	9121594809X
P2LCX 3 & 4 way	P2LCXK20P



P2LAX 3-way	912132BPSXZ
P2LBX 3-way	912132BPSXZ

Kit includes: plate, screws, o-rings

Manifold Bolts

Type	Qty.	Kit number
P2LAX	12	P2LAXK87P
P2LBX	12	P2LBXK87P
P2LCX	12	P2LCXK87P

Manifold O-rings

Type	Qty.	Kit number
P2LAX	30	P2LAXK84P
P2LBX	18	P2LBXK84P
P2LCX	12	P2LCXK84P

BOLD ITEMS ARE MOST POPULAR.

ATEX Certified Single & Double Solenoid Operated Valves

Vacuum to 145 PSIG (Vacuum to 10 bar)
 14°F to 122°F 22mm Coils (Enclosure Option M)
 -4°F to 122°F 30mm Coils (Enclosure Option S)

P2L A X 5 91 E S A D D M 49

Valve Size	
1/8"	A
1/4"	B
3/8"	C
1/2"	D

Voltage	
49	24VDC

Enclosures	
M	ATEX 8-22T EExm T4 135°C

Valve Type / Function	
<i>Internal Pilot Supply to Solenoid</i>	
2-Position Valve	5
3-Position Valve APB	6
3-Position Valve PC	7
3-Position Valve CE	8
<i>External Pilot Supply to Solenoids through Ports #12 & #14</i>	
2-Position Valve	N
3-Position Valve APB	P
3-Position Valve PC	Q
3-Position Valve CE	R

Overrides	
D	Extended Non-Locking

Solenoid Pilot Type	
D	Vented Pilot Exhaust
N	Tapped Pilot Exhaust (M5)

12 End Operator	
E	Double Solenoid Operated Valve
S	Single Solenoid Spring Return

Main Port Thread	
G1/8 (P2LA)	11
G1/4 (P2LB)	12
G3/8 (P2LC)	13
G1/2 (P2LD)	14
1/8" NPT (P2LA)	91
1/4" NPT (P2LB)	92
3/8" NPT (P2LC)	93
1/2" NPT (P2LD)	94

NOTE: For ATEX Certified Manual and Remote Air Pilot Valves, build the valve part number from the model number index on page D81 and add "-EX" following the number.

Example: P2LAX591PS-EX

NOTE: All valves include a 3 Meter Sealed Cable with Assembly.



ATEX Certified Solenoid Pilot Assemblies

P2F S 1 3 A 3 D M 49

Voltage	
49	24VDC

Enclosures	
M	ATEX 8-22T EExm T4 135°C

NOTE: All valves include a 3 Meter Sealed Cable with Assembly.

BOLD ITEMS ARE MOST POPULAR.



D

Viking Life

Viking Xtreme


B

ADEX

N

Technical Information

22mm Solenoid Pilot Operators & Coils

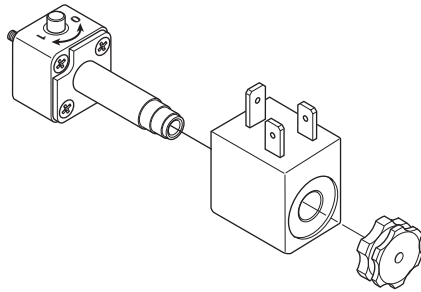

22mm Solenoid Pilot Options

The P2FP13*4* (NC) 3/2 solenoid pilot operators are designed for piloting pneumatic control valves with compressed air or other inert gases.

The P2FP operator is available for Normal operating pressures up to 10 bar or the Xtreme maximum operating pressure of 16 bar and wide band voltage tolerances required for mobile applications.

Corrosion Resistant Design

The pilot valve body is manufactured in thermoplastic PA6 material and the core tube brass / stainless steel. The plunger / core is made from stainless steel and the valve seats from FKM.

Solenoid Pilot Exhaust

These operators all exhaust out of the top of the core tube which is tapped M5. The standard solenoid nut fitted to the core tube is a diffuser nut which allows the exhaust to escape to atmosphere. This nut also minimizes ingress of dirt into the valve through this port. The alternative plastic knurled nut can be specified (refer to part number system) if the exhaust air needs captured and piped away using the M5 tapped port.

Mobile Applications

Viking Xtreme valves are tested to +5g shock and vibration. Solenoid operated valves are designed to operate with wide voltage tolerance bands within the ambient temperature ranges stated in the technical section.

Coils

Coils are wound with enameled copper wire, having a temperature index of 180°C with class F insulation (155°C) and are encapsulated in Thermoplastic resin. When fitted with suitable connector and correct gasket, they give protection to IP65.

Manual Override Options

The pilot operators can be supplied with locking or non-locking manual override. The standard manual override is the monostable (spring return) extended brass override. Alternatively the bistable (locking) override can be specified as an alternative for the Normal duty 10 bar option.

Spares

Solenoid operators are available as spares complete with mounting screws and seals. Coils and connectors should be ordered separately unless ATEX certified and intrinsically safe is needed. ATEX certified operators and coils must be ordered together.

Transients

Interrupting the current through the solenoid coil produces momentary voltage peaks which, under unfavorable conditions, can amount to several hundred times the rated operating voltage. Normally, these transients do not cause problems, but to achieve the maximum life of relays in the circuit (and particularly of transistors, thyristors and integrated circuits) it is desirable to provide protection by means of voltage-dependent resistors (varistors). All connectors / cable plugs with LEDs include this type of circuit protection.

Materials

Pilot Valve

Body Polyamide

Armature Tube:

Normal Pilot Operator.....Brass

Extreme Pilot Operator.....Stainless Steel

Plunger & Core.....Corrosion resistant Cr-Ni Steel

Seals..... Fluorocarbon (FKM)

Screws.....Stainless Steel

Coil

Encapsulation Material Thermoplastic

ATEX



ATEX is a European Directive (94/9/EC) valid for products to be used within an explosive atmosphere.

Both ATEX certified solenoid, remote pilot and manual operated valves, as well as complete solenoid pilot assemblies are available. For specific information regarding ATEX certification please visit www.parker.com/pneumatics.

D

Viking
Life



Viking
Xtreme

B


ADEX

N

Pilot Operator Kits

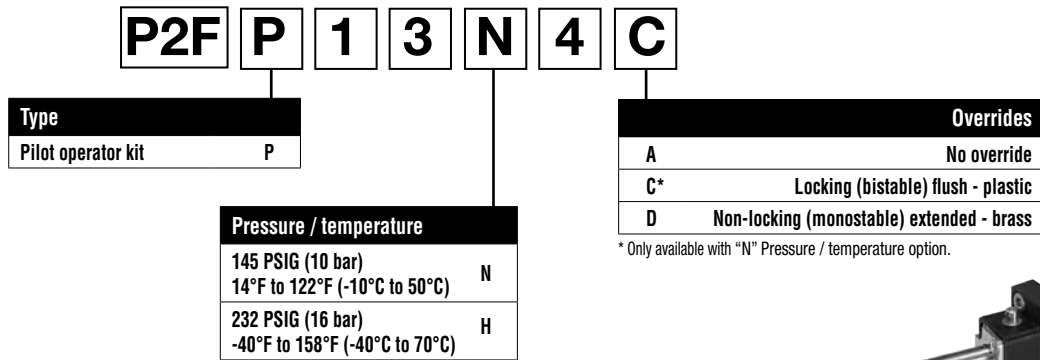

Solenoid Kits

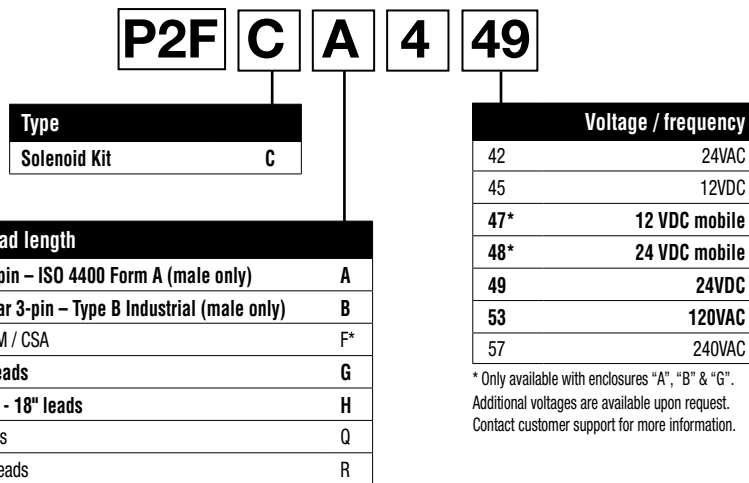

* Only available with voltage codes "45", "49", "53" & "57". Not for use with the Xtreme version (-40°C to 70°C).

Solenoid Enclosures



Solenoid Information (Solenoids are rated for continuous duty.)

Voltage Code	Enclosure "A"			Enclosure "B" to "R"			
	AC 60Hz	50Hz	DC	Power consumption	Holding (amps)	Power consumption	Holding (amps)
42	24	22		3.9VA	.14	7.3VA	.31
45	—	—	12	2.6W	.21	4.6W	.37
47*	—	—	12	6.2W	.52	5.5W	.46
48*	—	—	24	6.8W	.29	6.0W	.25
49	—	—	24	2.7W	.11	4.8W	.20
53	120	110	—	4.1VA	.04	6.3VA	.05
57	240	230	—	3.7VA	.02	6.4VA	.03

* Mobile voltages. Solenoid voltage characteristics for all coils located on page D49.

Replacement Solenoid Nut

Description	Part number	Description	Part number
Solenoid diffuser nut	PS1556	Solenoid vented nut	PS2892P

BOLD ITEMS ARE MOST POPULAR



Intrinsically safe solenoid valves (“E” option)

Hazardous location class:

Class I; Groups A, B, C & D

Class II; Groups E, F, & G


Class III; Div. I

For use in low voltage (24VDC) Intrinsically Safe applications. NO OTHER VOLTAGE IS APPROVED.

Comes standard with non-lighted solenoid connector. 36mm Coil width.

Must be connected to an FM approved Barrier.


For dimensions, reference standard solenoid models. Maximum internally piloted valve pressure is 115 PSIG. Pressures to 145 PSIG can be used when external pilot is utilized and pilot pressure is limited to 115 PSIG.

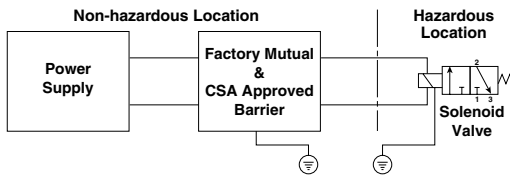

Intrinsically safe solenoid pilot assembly kits

Description	Part number
24VDC	P2FS13N1AE49

Kit includes: coil, connector, o-ring & screws



Hazardous duty solenoid valves (“F” option)

Hazardous location class:

Class I; Zone I EX, M, II & T4

Class I; Div. I, Groups A, B, C, & D

Class II & III; Div. I, Groups E, F, & G

Comes standard with 1/2" conduit connection.

Voltage range = ±10%

Ambient temperature range = -20°C (-4°F) to 60°C (140°F)

Duty factor = 100%

IP65 Rated (with connected conduit connector)

Notes:

1. Maximum non-hazardous location voltage not to exceed 250V RMS.
2. Connect per Barrier Manufacturers instructions.
3. Factory Mutual requires connections per ISA RP 12.6 instructions.
4. CSA requires “Installation to be in accordance with the Canadian Electrical Code. Part I.”
5. The hazardous duty coils are wider in size than size A, B, C & D valves. If mounted on a manifold, the valves need to be staggered to fit.





**Option F
Hazardous Duty FM / CSA**

Internal to external pilot conversion (size A & B only)

To convert from Internal to External Pilot Valve, simply remove the (2) fasteners that attach the end cap to the valve body. Rotate the end cap 180° and attach back to the valve body. For single solenoid valves, only the 14-End needs to be rotated. For double solenoid valves, both ends must be converted for proper function.

The 12 & 14-Ports are always tapped no matter what Valve Type / Function is selected. For Internal Pilot Function, ports do NOT need to be plugged.

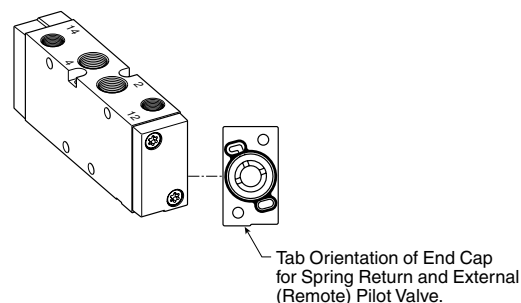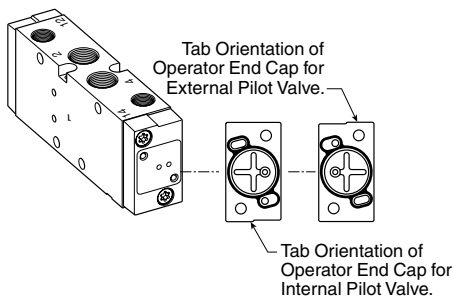

D

Viking
Lite

Viking
Xtreme

B

ADEX

N

Operating Temperature

- **Normal** 14°F to 122°F (-10°C to 50°C)
- **Extreme** -40°F to 158°F (-40°C to 70°C)

Flow Rating

Valve Size	Port Size	2-Position	3-Position
P2LAX	1/8"	0.7	0.5
P2LBX	1/4"	1.3	0.9
P2LCX	3/8"	2.5	1.8
P2LDX	1/2"	2.7	1.9

Operating Pressure

Maximum: Normal.....145 PSIG (10 bar)
 Extreme.....232 PSIG (16 bar)
 Minimum:

Valve Type - Internal Pilot	Minimum PSIG (bar)			
	P2LAX	P2LBX	P2LCX	P2LDX
Single Sol - Spring Return	46 (3.2)	51 (3.5)	51 (3.5)	51 (3.5)
Single Remote Pilot - Spring Return	46 (3.2)	51 (3.5)	51 (3.5)	51 (3.5)
Double Solenoid - 2-Position	22 (1.5)	22 (1.5)	22 (1.5)	22 (1.5)
Double Remote Pilot - 2-Position	22 (1.5)	22 (1.5)	22 (1.5)	22 (1.5)
Double Solenoid - 3-Position (APB, PC, CE)	51 (3.5)	51 (3.5)	51 (3.5)	51 (3.5)
Double Remote Pilot - 3-Position (APB, PC, CE)	51 (3.5)	51 (3.5)	51 (3.5)	51 (3.5)

Valve Type - External Pilot	P2LAX	P2LBX	P2LCX	P2LDX
All Viking Series	Vacuum			

Solenoid Voltage Characteristics

Non-mobile Coils

+10% / -10% for all Coils with Normal and Extreme Operators

Mobile Coils - Normal Pilot Operator

22mm 12 & 24VDC - Mobile (47 & 48 Voltage Code)

Minimum Inlet Pressure (bar)	Operating Temperature		
	-10°C	+10°C	+50°C
3	+30 / -25% VDC	+30 / -20% VDC	+25 / -15% VDC
6	+30 / -30% VDC	+30 / -25% VDC	+25 / -20% VDC
8	+30 / -30% VDC	+30 / -30% VDC	+25 / -25% VDC
10	+30 / -30% VDC	+30 / -30% VDC	+25 / -30% VDC

30mm 12 & 24VDC - Mobile (47 & 48 Voltage Code)

Minimum Inlet Pressure (bar)	Operating Temperature		
	-10°C	+10°C	+50°C
3	+30 / -30% VDC	+30 / -30% VDC	+25 / -30% VDC
6	+30 / -30% VDC	+30 / -30% VDC	+25 / -30% VDC
8	+30 / -30% VDC	+30 / -30% VDC	+25 / -30% VDC
10	+30 / -30% VDC	+30 / -30% VDC	+25 / -30% VDC

Mobile Coils - Extreme Pilot Operator

22mm 12 & 24VDC - Mobile (47 & 48 Voltage Code)

Minimum Inlet Pressure (bar)	Operating Temperature			
	-40°C	+10°C	+50°C	+70°C
4	+30 / -25% VDC	+30 / -25% VDC	+30 / -10% VDC	+20 / -10% VDC
8	+30 / -30% VDC	+30 / -25% VDC	+30 / -15% VDC	+20 / -15% VDC
12	+30 / -30% VDC	+30 / -30% VDC	+30 / -15% VDC	+20 / -15% VDC
16	+30 / -30% VDC	+30 / -30% VDC	+30 / -20% VDC	+20 / -20% VDC

30mm 12 & 24VDC - Mobile (47 & 48 Voltage Code)

Minimum Inlet Pressure (bar)	Operating Temperature			
	-40°C	+10°C	+50°C	+70°C
4	+30 / -30% VDC	+30 / -30% VDC	+25 / -30% VDC	+15 / -30% VDC
8	+30 / -30% VDC	+30 / -30% VDC	+25 / -30% VDC	+15 / -30% VDC
12	+30 / -30% VDC	+30 / -30% VDC	+25 / -30% VDC	+15 / -30% VDC
16	+30 / -30% VDC	+30 / -30% VDC	+25 / -30% VDC	+15 / -30% VDC

Note: All table ratings are based on 100% continuous duty and 5G shock vibration. At 50% continuous duty all ratings are +30% / -30% for all Temperatures and Pressures.




D
 Viking Life
 Viking Xtreme
B
ADEX
N

Female Electrical Connectors / Accessories

**30mm Square 3-Pin – ISO 4400, DIN 43650A
(Use with Enclosure “A”)**

Description	Connector with 6' (2m) cord	Connector
Unlighted	PS2028JCP	PS2028BP
Light – 6-48V, 50/60Hz, 6-48VDC	PS2032J79CP*	PS203279BP
Light – 120V/60Hz	PS2032J83CP*	PS203283BP
Light – 240V/60Hz	N/A	PS203283BP

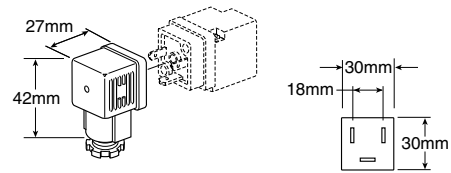

* LED with surge suppression.


Note: Max ø6.5mm cable size required for connector w/o 6' (2m) cord. IP65 rated when properly installed.

Engineering data:

Conductors: 2 poles plus ground; cable range (connector only): 8 to 10mm (0.31 To 0.39 Inch); contact spacing: 18mm.

**22mm Rectangular 3-Pin – Type B Industrial
(Use with Enclosure “B”)**

Description	Connector with 6' (2m) cord	Connector
Unlighted	PS2429JBP	PS2429BP
Light – 24V/60Hz, 24VDC	PS2430J79BP*	PS243079BP
Light – 120V/60Hz	PS2430J83BP*	PS243083BP
Light – 240V/60Hz	N/A	PS243087BP

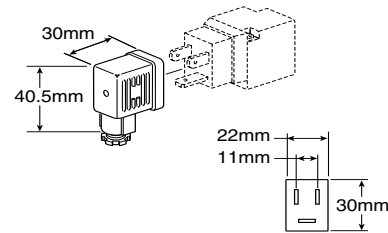

* LED with surge suppression.

Note: Max ø6.5mm cable size required for connector w/o 6' (2m) cord. IP65 rated when properly installed.

Engineering data:

Conductors: 2 poles plus ground; cable range (connector only): 6 to 8mm (0.24 To 0.31 Inch); contact spacing: 11mm.

D

Viking Life

Viking Xtreme

B

ADEX

N

Exhaust Mufflers

Pipe thread	Part number
M5	P6M-PAC5
1/8" NPT	EM12
1/4" NPT	EM25
3/8" NPT	EM37
1/2" NPT	EM50

P6M - Plastic; EM - Sintered bronze



Plastic Silencers

Thread size	A (mm)	B (mm)	Part number	
			NPT	BSPT
M5	.43 (11)	.32 (8)	AS-5	
1/8"	1.57 (40)	.63 (16)	ASN-6	AS-6
1/4"	2.56 (65)	.83 (21)	ASN-8	AS-8
3/8"	3.35 (85)	.98 (25)	ASN-10	AS-10
1/2"	3.74 (95)	1.18 (30)	ASN-15	AS-15



Exhaust Protector

Features

- 1/8 and 1/4 NPT male sizes
- Fitted with a brass pipe adapter and a fluorocarbon membrane
- Resistant to rust, clog, wash down and contamination

Applications


These protectors are intended for mobile applications, quick venting applications and alternative exhaust port breathers that require protection against clogging.

Ideal for valves exposed to harsh environmental conditions (which can cause a “caking up” in the exhaust pipe ports where the bronze mufflers or breather vents are installed).

Particularly suitable for time-sensitive applications such as axle-lift suspensions or pushers or tag axles.

Flow data (SCFM)

Size	60 PSIG Inlet	90 PSIG Inlet	125 PSIG Inlet	Part number
1/8"	40.1	56.5	75.5	E90016
1/4"	44.6	62.7	83.5	E90017

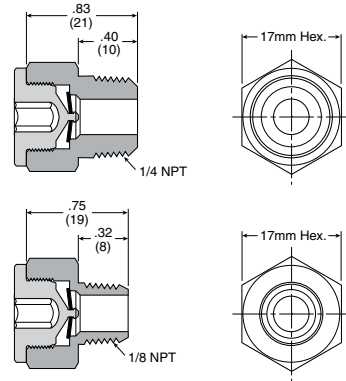

Operating information


Operating pressure:	0 to 150 PSIG (0 to 10 bar)
Operating temperature:	-40°F to 140°F (-40°C to 60°C)

Material specifications


Body & pipe adapter	Brass
Membrane	Fluorocarbon

Spool Service Kits

Description	Includes items (qty.)	Part number
Size A, 4-way, 2-position, solenoid & air pilot valves	1 (1), 3 (2), 4 (2)	P2LAXSK1
Size A, 4-way, 3-position, solenoid & air pilot valves	1 (1), 2 (2), 3 (2), 4 (2)	P2LAXSK2
Size A, 4-way, 2-position, manual valves	Spool only (not shown)	P2LAXSK3
Size A, 4-way, 3-position, manual valves	Spool only (not shown)	P2LAXSK4
Size B, 4-way, 2 & 3-position valves	1 (1), 3 (2), 4 (2)	P2LBXSK1
Size C & Size D, 4-way, 2 & 3-position valves	1 (1), 3 (2), 4 (2)	P2LCDXSK1

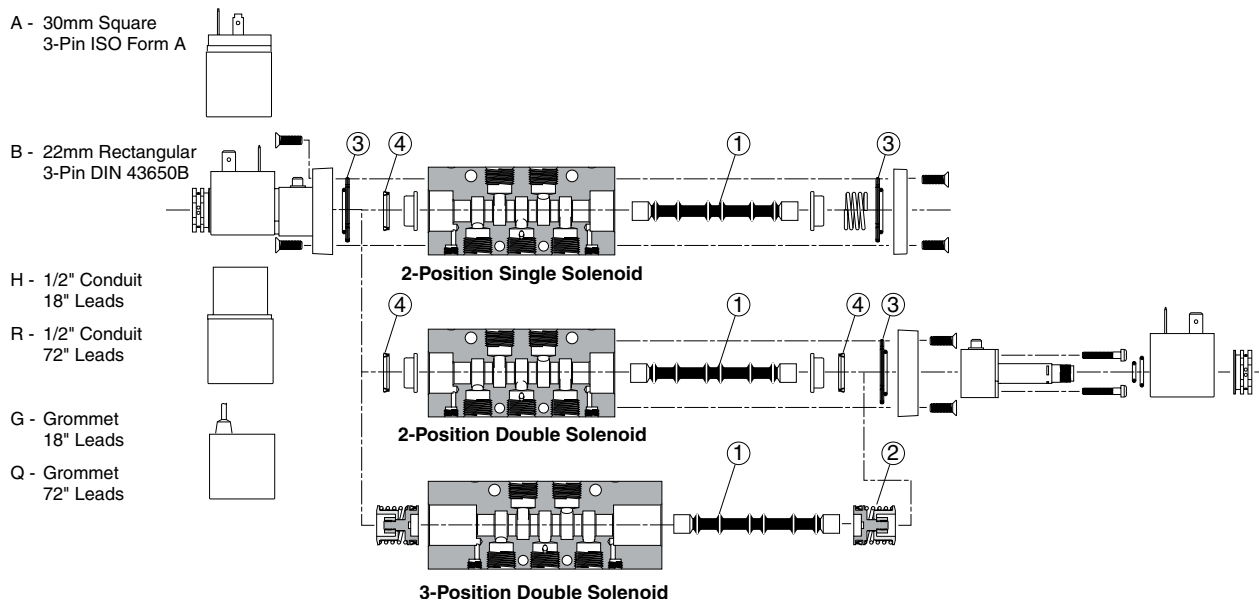


68PM Male Connector

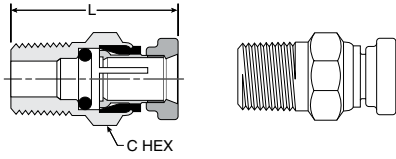


Part number	Tube size	Pipe thread (NPTF)	C hex	L
68PM-2-1	1/8	1/16	3/82	0.93
68PM-2-2	1/8	1/8	7/16	0.88
68PM-5/32-1	5/32	1/16	3/8	0.95
68PM-5/32-2	5/32	1/8	7/16	0.74
68PM-5/32-4	5/32	1/4	9/16	0.99
68PM-3-1	3/16	1/16	7/16	0.95
68PM-3-2	3/16	1/8	7/16	0.92
68PM-3-4	3/16	1/4	9/16	1.10

68PMT Male Connector

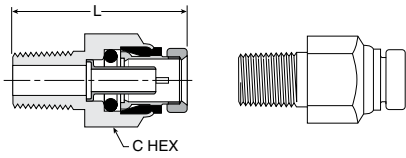


Part number	Tube size	Pipe thread (NPTF)	C hex	L
68PMT-4-2	1/4	1/8	1/2	1.06
68PMT-4-4	1/4	1/4	9/16	1.19
68PMT-4-6	1/4	3/8	3/4	1.27
68PMT-6-2	3/8	1/8	3/4	1.37
68PMT-6-4	3/8	1/4	3/4	1.43
68PMT-6-6	3/8	3/8	3/4	1.33
68PMT-6-8	3/8	1/2	7/8	1.38
68PMT-8-4	1/2	1/4	7/8	1.72
68PMT-8-6	1/2	3/8	7/8	1.52
68PMT-8-8	1/2	1/2	7/8	1.44
68PMT-10-6	5/8	3/8	1	1.88
68PMT-10-8	5/8	1/2	1	1.88
68PMT-12-8	3/4	1/2	1-3/16	2.03

169PMNS Male Elbow Non-Swivel 90°

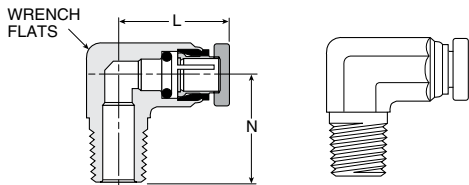


Part number	Tube size	Pipe thread (NPTF)	Wrench flats	L	N
169PMNS-2-2	1/8	1/8	3/8	0.86	0.68
169PMNS-5/32-2	5/32	1/8	3/8	0.88	0.68
169PMNS-3-2	3/16	1/8	3/8	0.75	0.67
169PMNS-3-4	3/16	1/4	1/2	0.74	0.93

169PMT Male Elbow Swivel 90°

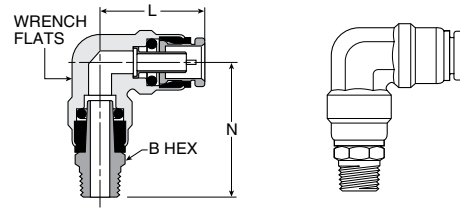

Part number	Tube size	Pipe Thread (NPTF)	Wrench flats	B hex	L	N
169PMT-4-2	1/4	1/8	13/32	7/16	0.84	1.21
169PMT-4-4	1/4	1/4	13/32	9/16	0.84	1.43
169PMT-4-6	1/4	3/8	13/32	11/16	0.84	1.43
169PMT-6-2	3/8	1/8	9/16	9/16	1.11	1.41
169PMT-6-4	3/8	1/4	9/16	9/16	1.11	1.58
169PMT-6-6	3/8	3/8	9/16	11/16	1.11	1.58
169PMT-6-8	3/8	1/2	9/16	7/8	1.11	1.79
169PMT-8-4	1/2	1/4	11/16	5/8	1.27	1.73
169PMT-8-6	1/2	3/8	11/16	3/4	1.27	1.81
169PMT-8-8	1/2	1/2	11/16	7/8	1.27	1.96
169PMT-10-6	5/8	3/8	7/8	3/4	1.53	2.03
169PMT-10-8	5/8	1/2	7/8	7/8	1.53	2.18

169PMTL Male Elbow Long Non-Swivel 90°

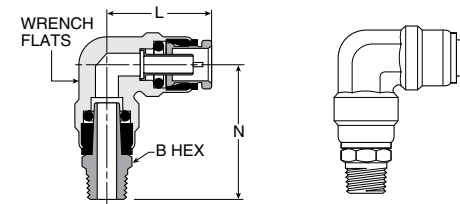

Part number	Tube size	Pipe Thread (NPTF)	Wrench flats	B hex	L	N
169PMTL-6-4	3/8	1/4	9/16	9/16	1.06	1.63
169PMTL-6-6	3/8	3/8	9/16	7/8	1.19	2.50
169PMTL-6-8	3/8	1/2	9/16	7/8	1.19	2.50
169PMTL-8-8	1/2	1/2	11/16	7/8	1.22	2.50
169PMTL-10-8	5/8	1/2	7/8	7/8	1.46	2.50

D

Viking
Lite


Viking
Xtreme

B

ADEX


N

169PMTNS Male Elbow Non-Swivel 90°

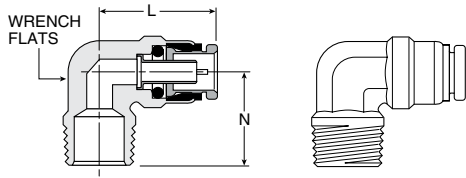


Part number	Tube size	Pipe thread (NPTF)	Wrench flats	L	N
169PMTNS-4-2	1/4	1/8	1/2	0.84	0.72
169PMTNS-4-4	1/4	1/4	1/2	0.84	0.90
169PMTNS-4-6	1/4	3/8	1/2	0.84	1.06
169PMTNS-6-2	3/8	1/8	9/16	1.05	0.75
169PMTNS-6-4	3/8	1/4	9/16	1.05	0.94
169PMTNS-6-6	3/8	3/8	3/4	1.05	0.94
169PMTNS-6-8	3/8	1/2	11/16	1.12	1.26
169PMTNS-8-4	1/2	1/4	11/16	1.17	1.06
169PMTNS-8-6	1/2	3/8	11/16	1.22	1.06
169PMTNS-8-8	1/2	1/2	11/16	1.22	1.26
169PMTNS-10-6	5/8	3/8	7/8	1.46	1.11
169PMTNS-10-8	5/8	1/2	7/8	1.46	1.32
169PMTNS-12-8	3/4	1/2	1	1.81	1.44

171PMT Male Run Tee Swivel

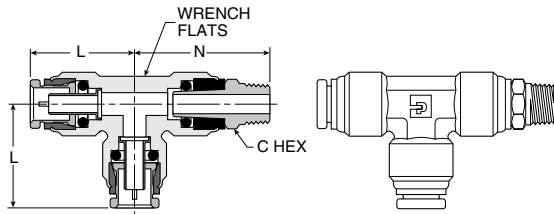


Part number	Tube size	Pipe thread (NPTF)	Wrench flats	L	N	N
171PMT-4-2	1/4	1/8	1/2	7/16	.85	1.25
171PMT-4-4	1/4	1/4	1/2	9/16	.85	1.48
171PMT-4-6	1/4	3/8	1/2	11/16	.85	1.43
171PMT-6-4	3/8	1/4	5/8	9/16	1.21	1.83
171PMT-6-6	3/8	3/8	5/8	11/16	1.21	1.83
171PMT-8-4	1/2	1/4	7/8	5/8	1.27	1.74
171PMT-8-6	1/2	3/8	7/8	3/4	1.27	1.83
171PMT-8-8	1/2	1/2	7/8	7/8	1.27	1.99

171PMTNS Male Run Tee Non-Swivel

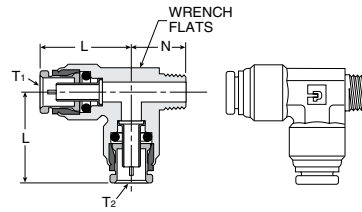


Part number	Tube 1 size	Tube 2 size	Pipe thread (NPTF)	Wrench flats	L1	L2	N
171PMTNS-4-4	1/4	1/4	1/4	15-32	0.91	0.91	0.94
171PMTNS-4-6-4	1/4	3/8	1/4	5/8	0.93	1.21	0.97
171PMTNS-6-4	3/8	3/8	1/4	5/8	1.21	1.21	0.97
171PMTNS-6-4-4	3/8	1/4	1/4	5/8	1.21	0.93	0.97
171PMTNS-6-4-6	3/8	1/4	3/8	5/8	1.22	0.97	0.93
171PMTNS-6-6	1/2	3/8	3/8	5/8	1.21	1.27	0.97
171PMTNS-6-8	1/2	3/8	1/2	5/8	1.17	1.27	1.26
171PMTNS-8-4	1/2	1/2	1/4	7/8	1.28	1.27	1.06

172PMT Male Branch Tee Swivel

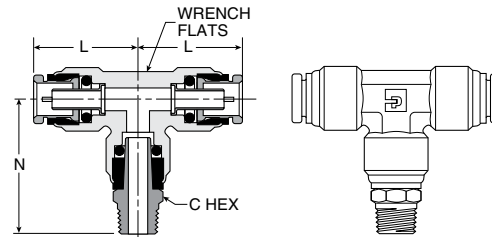


Part number	Tube size	Pipe thread (NPTF)	Wrench flats	C hex	L	N
172PMT-4-2	1/4	1/8	1/2	7/16	0.85	1.25
172PMT-4-4	1/4	1/4	1/2	9/16	0.85	1.43
172PMT-6-2	3/8	1/8	5/8	9/16	1.22	1.66
172PMT-6-4	3/8	1/4	5/8	5/8	1.22	1.83
172PMT-6-6	3/8	3/8	5/8	3/4	1.22	1.83
172PMT-8-4	1/2	1/4	7/8	5/8	1.27	1.73
172PMT-8-6	1/2	3/8	7/8	3/4	1.27	1.79
172PMT-8-8	1/2	1/2	7/8	7/8	1.27	1.97

172PMTNS Male Branch Tee Non-Swivel

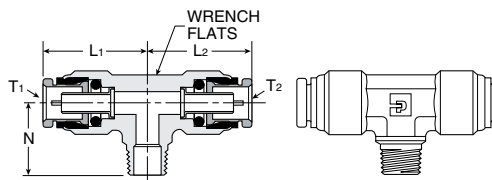

Part number	Tube 1 size	Tube 2 size	Pipe thread (NPTF)	Wrench flats	L1	L2	N
172PMTNS-4-2	1/4	1/4	1/8	1/2	0.91	0.91	0.78
172PMTNS-6-4	3/8	3/8	1/4	5/8	1.21	1.21	0.97
172PMTNS-6-4-4	3/8	1/4	1/4	5/8	1.21	.93	0.97
172PMTNS-6-6	3/8	3/8	3/8	5/8	1.21	1.21	0.97
172PMTNS-6-8	3/8	3/8	1/2	7/8	1.17	1.17	1.26
172PMTNS-8-6	1/2	1/2	3/8	7/8	1.28	1.28	1.06
172PMTNS-8-6-8	1/2	3/8	1/2	7/8	1.25	1.25	1.25
172PMTNS-8-8	1/2	1/2	1/2	7/8	1.34	1.25	1.25

P2LAX 3/2 Single & Double Operators – Solenoid

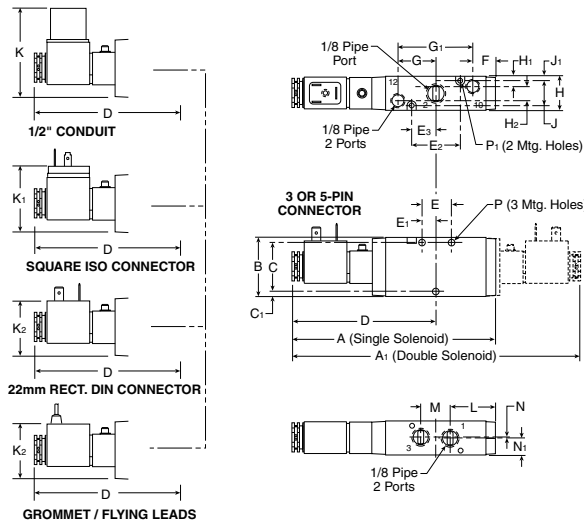


P2LAX 3/2 (solenoid)

A	A ₁	B	C	C ₁
5.35 (136)	7.60 (193)	1.57 (40)	1.26 (32)	.16 (4)
D	E	E ₁	E ₂	E ₃
3.80 (97)	.79 (20)	.39 (10)	1.26 (32)	.63 (16)
F	G	G ₁	H	H ₁
.55 (14)	.98 (25)	1.97 (50)	.87 (22)	.26 (6.6)
H ₂	J	J ₁	K	K ₁
.35 (9)	.65 (16.5)	.11 (2.9)	2.36 (60)	1.61 (41)
K ₂	L	M	N	N ₁
1.50 (38)	1.14 (29)	.79 (20)	.02 (0.5)	.42 (11)
P	P ₁			
∅ .17 ∅ (4.3)	∅ .12 ∅ (3.1)			

Inches (mm)

P2LAX 3/2 Single & Double Operators – Remote Pilot

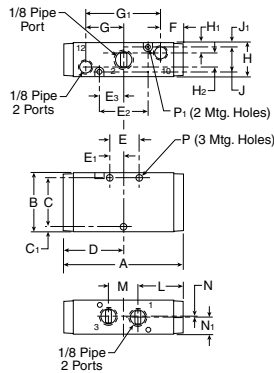


P2LAX 3/2 (remote)

A	B	C	C ₁	D
3.07 (78)	1.57 (40)	1.26 (32)	.16 (4)	1.54 (39)
E	E ₁	E ₂	E ₃	F
.79 (20)	.39 (10)	1.26 (32)	.63 (16)	.55 (14)
G	G ₁	H	H ₁	H ₂
.98 (25)	1.97 (50)	.87 (22)	.26 (6.6)	.35 (9)
J	J ₁	L	M	N
.65 (16.5)	.11 (2.9)	1.14 (29)	.79 (20)	.02 (0.5)
N ₁	P	P ₁		
.42 (11)	∅ .17 ∅ (4.3)	∅ .12 ∅ (3.1)		

Inches (mm)

P2LAX 5/2 & 5/3 Single & Double Operators, 4-way

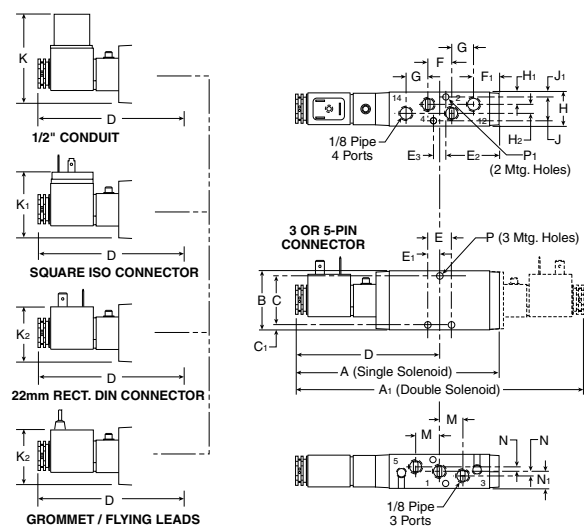

P2LAX 5/2 & 5/3 (solenoid)

A	A ₁	B	C	C ₁
5.47 (139)	7.72 (196)	1.57 (40)	1.30 (33)	.14 (3.5)
D	E	E ₁	E ₂	E ₃
3.86 (98)	.63 (16)	.31 (8)	1.42 (36)	.33 (8.5)
F	F ₁	G	H	H ₁
.63 (16)	.67 (17)	.59 (15)	.87 (22)	.31 (8)
H ₂	J	J ₁	K	K ₁
.24 (6)	.63 (16)	.12 (3.9)	2.36 (60)	1.61 (41)
K ₂	M	N	N ₁	P
1.50 (38)	.63 (16)	.12 (3)	.43 (11)	∅ .17 ∅ (4.3)
P ₁				
∅ .12 ∅ (3.1)				

Inches (mm)

D

Viking Lite


Viking Xtreme

B

ADEX

N

P2LAX 5/2 & 5/3 Single & Double Operators – Remote Pilot

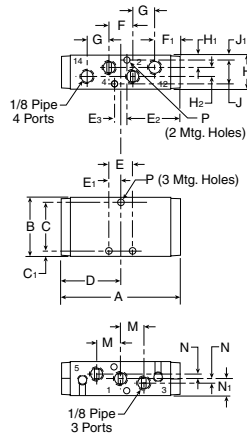


P2LAX 5/2 & 5/3 (remote)

A	B	C	C ₁	D
3.19 (81)	1.57 (40)	1.30 (33)	.14 (3.5)	1.59 (40.5)
E	E ₁	E ₂	E ₃	F
1.47 (16)	.31 (8)	1.42 (36)	.33 (8.5)	.63 (16)
F ₁	G	H	H ₁	H ₂
.67 (17)	.59 (15)	.87 (22)	.31 (8)	.24 (6)
J	J ₁	M	N	N ₁
.63 (16)	.12 (3)	.63 (16)	.12 (3)	.43 (11)
P	P ₁			
∅ .17 ∅ (4.3)	∅ .12 ∅ (3.1)			

Inches (mm)

P2LAX 3/2 Single & Double Operators – IEM Aluminum Bar Manifold

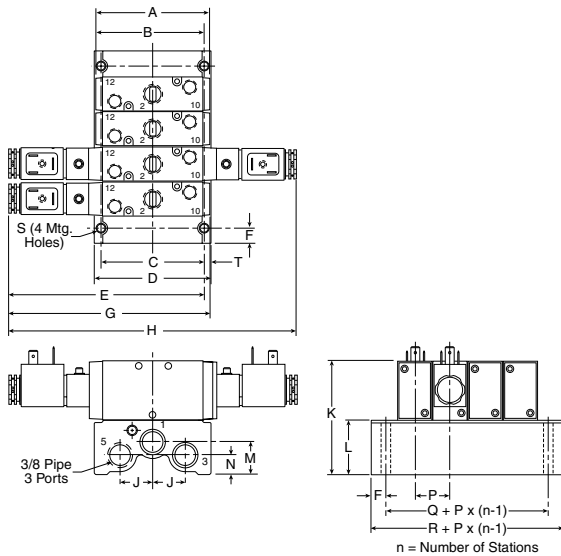


**P2LAX 3/2
 IEM Aluminum bar manifold**

A	B	C	D	E
3.07 (78)	2.83 (72)	2.76 (70)	3.12 (79)	5.18 (132)
F	G	H	J	K
41 (10.5)	5.35 (136)	7.72 (193)	.87 (22)	3.11 (79)
L	M	N	P	Q
1.54 (39)	.87 (22)	.52 (13.2)	.93 (23.5)	1.56 (39.5)
R	S	T		
2.36 (60)	∅ .22 ∅ (5.5)	.18 (4.5)		

Inches (mm)

P2LAX 5/2 & 5/3 Single & Double Operators – IEM Aluminum Bar Manifold

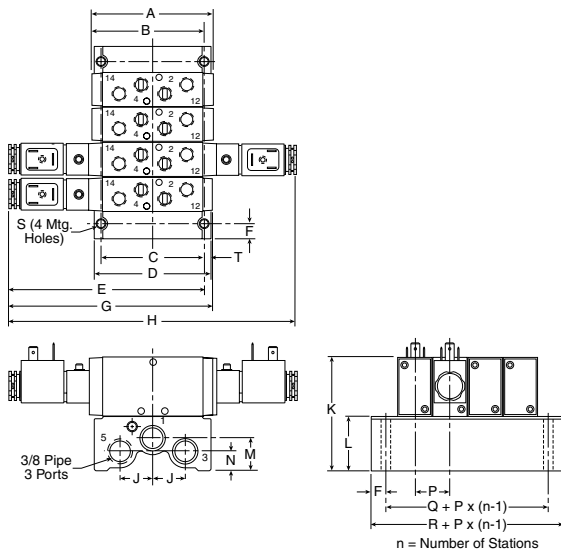

**P2LAX 5/2 & 5/3
 IEM Aluminum bar manifold**

A	B	C	D	E
3.19 (81)	2.97 (76)	2.76 (70)	3.12 (79)	5.26 (134)
F	G	H	J	K
41 (10.5)	5.47 (139)	7.72 (196)	.87 (22)	3.11 (79)
L	M	N	P	Q
1.54 (39)	.87 (22)	.52 (13.2)	.93 (23.5)	1.56 (39.5)
R	S	T		
2.36 (60)	∅ .22 ∅ (5.5)	.18 (4.5)		

Inches (mm)

D

Viking
 Life


Viking
 Xtreme

B

ADEX

N

P2LBX 3/2 Single & Double Operators – Solenoid

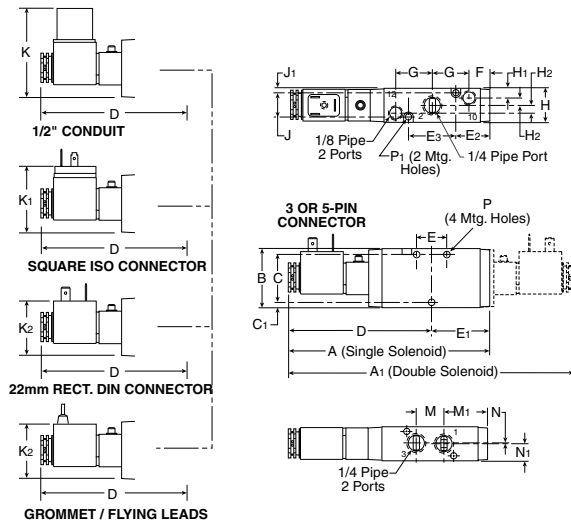


P2LBX 3/2 (solenoid)

A	A ₁	B	C	C ₁
5.35 (136)	7.60 (193)	1.57 (40)	1.26 (32)	.16 (4)
D	E	E ₁	E ₂	E ₃
3.80 (96.5)	.79 (20)	1.54 (39)	.51 (13)	1.26 (32)
F	G	H	H ₁	H ₂
.55 (14)	.98 (25)	.87 (22)	.26 (6.6)	.18 (4.5)
J	J ₁	K	K ₁	K ₂
.65 (16.5)	.11 (2.9)	2.36 (60)	1.61 (41)	1.50 (38)
M	M ₁	N	N ₁	P
.79 (20)	1.14 (29)	.02 (0.5)	.42 (11)	∅ .17 ∅ (4.3)

P₁
 ∅ .12
 ∅ (3.1)

Inches (mm)

P2LBX 3/2 Single & Double Operators – Remote Pilot

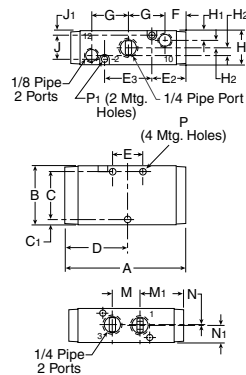


P2LBX 3/2 (remote)

A	B	C	C ₁	D
3.08 (78)	1.57 (40)	1.26 (32)	.16 (4)	1.54 (39)
E	E ₂	E ₃	F	G
.79 (20)	.51 (13)	1.26 (32)	.55 (14)	.98 (25)
H	H ₁	H ₂	J	J ₁
.87 (22)	.26 (6.6)	.18 (4.5)	.65 (16.5)	.11 (2.9)
M	M ₁	N	N ₁	P
.79 (20)	1.14 (29)	.02 (0.5)	.42 (11)	∅ .17 ∅ (4.3)

P₁
 ∅ .12
 ∅ (3.1)

Inches (mm)

P2LBX 5/2 & 5/3 Single & Double Operators – Solenoid

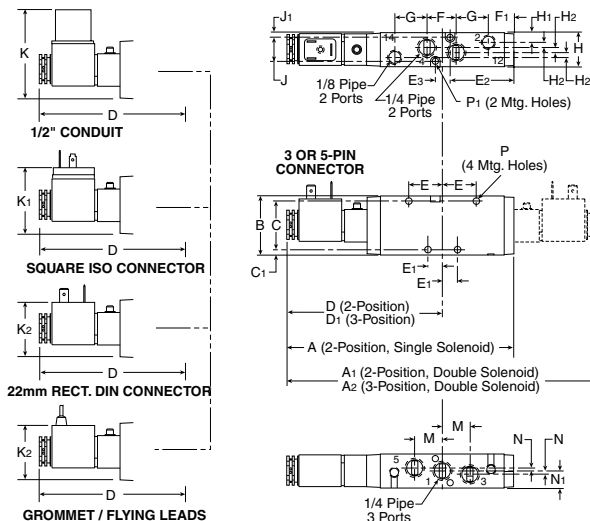

P2LBX 5/2 & 5/3 (solenoid)

A	A ₁	A ₂	B	C
6.14 (156)	8.39 (213)	9.23 (235)	1.57 (40)	1.26 (32)
C ₁	D	D ₁	E	E ₁
.16 (4)	4.21 (107)	4.64 (118)	.91 (23)	.39 (10)
E ₂	E ₃	F	F ₁	G
1.73 (44)	.39 (10)	.79 (20)	.67 (17)	.87 (22)
H	H ₁	H ₂	J	J ₁
.87 (22)	.26 (6.6)	.12 (3)	.65 (16.5)	.12 (3)
K	K ₁	K ₂	M	N
2.36 (60)	1.61 (41)	1.50 (38)	.79 (20)	.08 (2)
N ₁	P	P ₁		
.43 (11)	∅ .17 ∅ (4.3)	∅ .12 ∅ (3.1)		

Inches (mm)

D

Viking Lite


Viking Xtreme

B

ADEX

N

P2LBX 5/2 & 5/3 Single & Double Operators – Remote Pilot

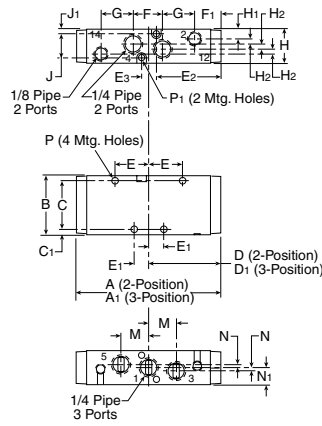


P2LBX 5/2 & 5/3 (remote)

A	A ₁	B	C	C ₁
3.95 (100)	4.61 (117)	1.57 (40)	1.26 (32)	.16 (4)
D	D ₁	E	E ₁	E ₂
1.93 (49)	2.28 (58)	.91 (23)	.39 (10)	1.73 (44)
E ₃	F	F ₁	G	H
.39 (10)	.79 (20)	.67 (17)	.87 (22)	.8 (22)
H ₁	H ₂	J	J ₁	K
.26 (6.6)	.12 (3)	.65 (16.5)	.11 (2.8)	2.90 (74)
M	N	N ₁	P	P ₁
.79 (20)	.08 (2)	.43 (11)	Ø .17 (Ø 4.3)	Ø .12 (Ø 3.1)

Inches (mm)

P2LBX 5/2 Single & Double Operators – Solenoid _ NAMUR

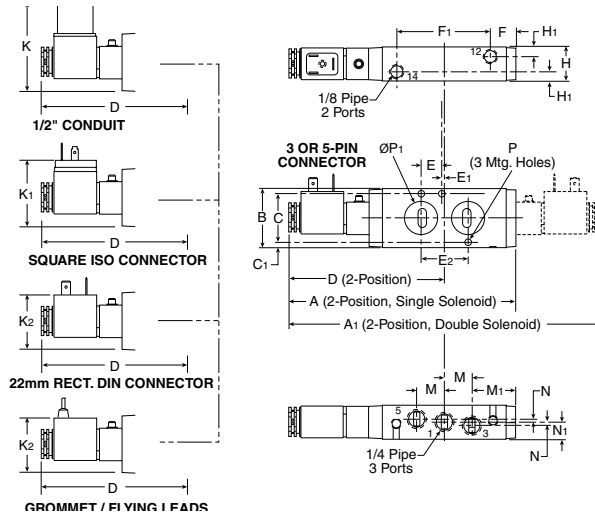

P2LBX 5/2 (NAMUR)

A	A ₁	B	C	C ₁
6.15 (156)	8.39 (213)	1.57 (40)	1.26 (32)	.16 (4)
D	E	E ₁	E ₂	F
4.21 (107)	.47 (12)	.08 (2)	.94 (24)	.67 (17)
F ₁	H	H ₁	M	M ₁
2.52 (64)	.87 (22)	.26 (6.6)	.79 (20)	1.14 (29)
N	N ₁	P	P ₁	
.08 (2)	.43 (11)	Ø .22 (Ø 5.5)	Ø .76 (Ø 19.4)	

Inches (mm)

D

Viking
Lite


Viking
Xtreme

B

ADEX

N

P2LBX 3/2 Single & Double Operators – IEM Aluminum Bar Manifold

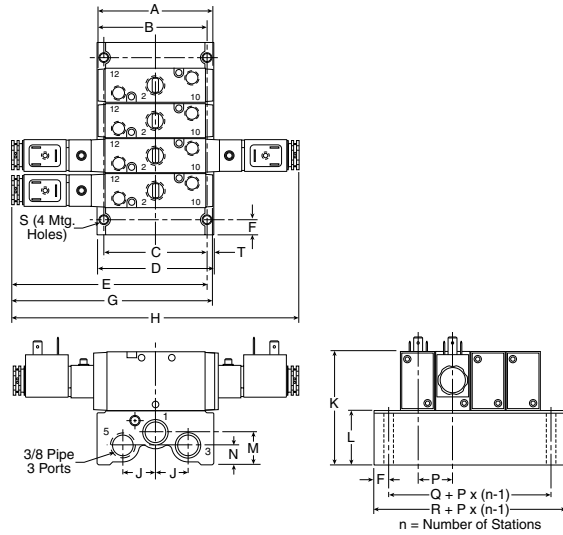


**P2LBX 3/2
 IEM Aluminum bar manifold**

A	B	C	D	E
3.86 (78)	2.91 (74)	2.76 (70)	3.12 (79)	5.17 (131)
F	G	H	J	K
.40 (10.2)	5.33 (136)	7.6 (193)	.87 (22)	3.11 (79)
L	M	N	P	Q
1.47 (37)	.87 (22)	.52 (13.2)	.93 (23.5)	1.56 (39.6)
R	S	T		
2.36 (60)	Ø .22 Ø (5.5)	.18 (4.6)		

Inches (mm)

P2LBX 5/2 & 5/3 Single & Double Operators – IEM Aluminum Bar Manifold

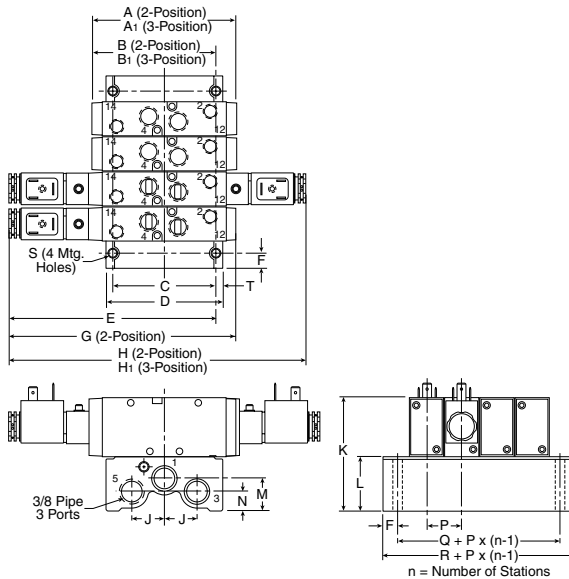

**P2LBX 5/2 & 5/3
 IEM Aluminum bar manifold**

A	A1	B	B1	C
3.86 (98)	4.70 (120)	3.42 (84)	3.73 (95)	2.76 (70)
D	E	F	G	H
3.12 (79)	5.59 (142)	.40 (10.2)	6.14 (156)	8.39 (213)
H1	J	K	L	M
9.23 (235)	.87 (22)	3.11 (79)	1.47 (37)	.87 (22)
N	P	Q	R	S
.52 (13.2)	.93 (23.5)	1.56 (39.6)	2.36 (60)	Ø .22 Ø (5.5)
T				
.18 (4.6)				

Inches (mm)

D

Viking
Lite


Viking
Xtreme

B

ADEX

N

P2LCX 3/2 Single & Double Operators – Solenoid

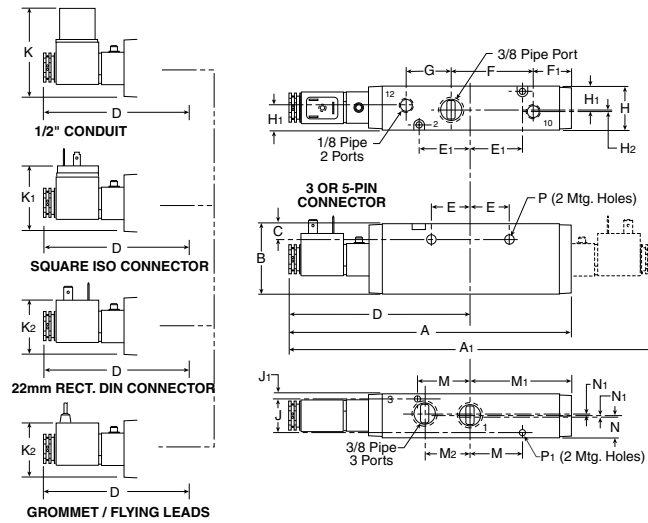


P2LCX 3/2 (solenoid)

A	A ₁	B	C	D
7.66 (194.5)	9.80 (249)	1.89 (48)	.43 (11)	4.90 (124.5)
E	E ₁	F	F ₁	G
1.04 (26.5)	1.40 (35.5)	2.24 (57)	1.02 (26)	1.22 (31)
H	H ₁	H ₂	J	J ₁
1.18 (30)	.67 (17)	.02 (0.5)	.91 (23)	.14 (3.5)
K	K ₁	K ₂	M	M ₁
2.52 (64)	1.77 (45)	1.65 (42)	1.40 (35.5)	2.76 (70)
M ₂	N	N ₁	P	P ₁
1.18 (30)	.55 (14)	.04 (1)	Ø .27 (6.9)	Ø .17 (4.4)

Inches (mm)

P2LCX 3/2 Single & Double Operators – Remote Pilot

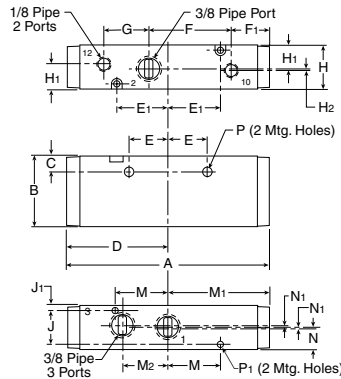


P2LCX 3/2 (remote)

A	B	C	D	E
5.51 (140)	1.89 (48)	.43 (11)	2.76 (70)	1.04 (26.5)
E ₁	F	F ₁	G	H
1.40 (35.5)	2.24 (57)	1.02 (26)	1.22 (31)	1.18 (30)
H ₁	H ₂	J	J ₁	M
.67 (17)	.02 (0.5)	.91 (23)	.14 (3.5)	1.40 (35.5)
M ₁	M ₂	N	N ₁	P
2.76 (70)	1.18 (30)	.55 (14)	.04 (1)	Ø .27 (6.9)

P₁
 Ø .17
 Ø (4.4)

Inches (mm)

P2LCX 5/2 & 5/3 Single & Double Operators – Solenoid

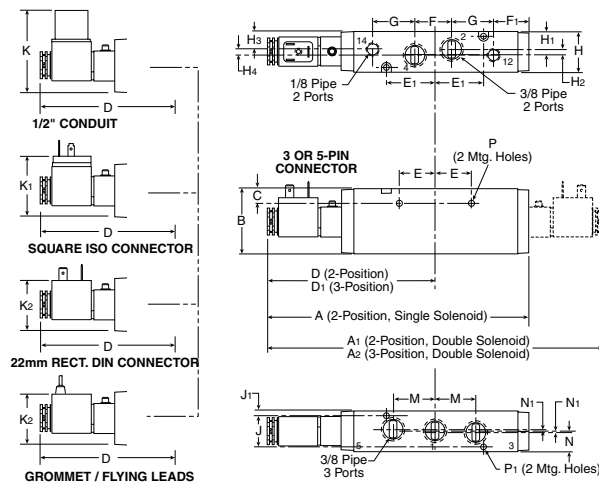

P2LCX 5/2 & 5/3 (solenoid)

A	A ₁	A ₂	B	C
7.68 (195)	9.84 (250)	10.71 (272)	1.89 (48)	.43 (11)
D	D ₁	E	E ₁	F
4.92 (125)	5.35 (136)	1.04 (26.5)	1.40 (35.5)	1.06 (27)
F ₁	G	H	H ₁	H ₂
1.02 (26)	1.22 (31)	1.18 (30)	.53 (13.5)	.12 (3)
H ₃	H ₄	J	J ₁	K
.51 (13)	.16 (4)	.91 (23)	.14 (3.5)	2.52 (64)
K ₁	K ₂	M	N	N ₁
1.77 (45)	1.65 (42)	1.18 (30)	.55 (14)	.04 (1)


P P₁
 Ø .27 Ø .17
 Ø (6.9) Ø (4.4)

Inches (mm)

Dimensions

P2LCX Inline & Manifold Dimensions

P2LCX 5/2 & 5/3 Single & Double Operators – Remote Pilot

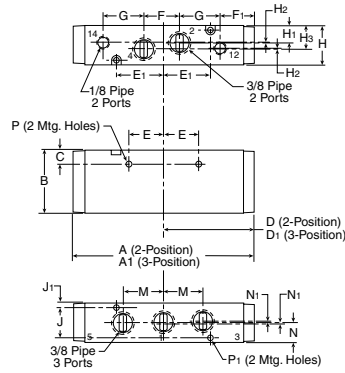


P2LCX 5/2 & 5/3 (remote)

A	A ₁	B	C	D
5.51 (140)	6.38 (162)	1.89 (48)	.43 (11)	2.76 (70)
D ₁	E	E ₁	F	F ₁
3.18 (81)	1.04 (26.5)	1.40 (35.5)	1.06 (27)	1.02 (26)
G	H	H ₁	H ₂	H ₃
1.22 (31)	1.18 (30)	.51 (13)	.02 (0.5)	.12 (3)
J	J ₁	M	N	N ₁
.91 (23)	.14 (3.5)	1.18 (30)	.55 (14)	.04 (1)
P	P ₁			
Ø .27 (6.9)	Ø .17 (4.4)			

Inches (mm)

P2LCX 3/2 Single & Double Operators – IEM Aluminum Bar Manifold

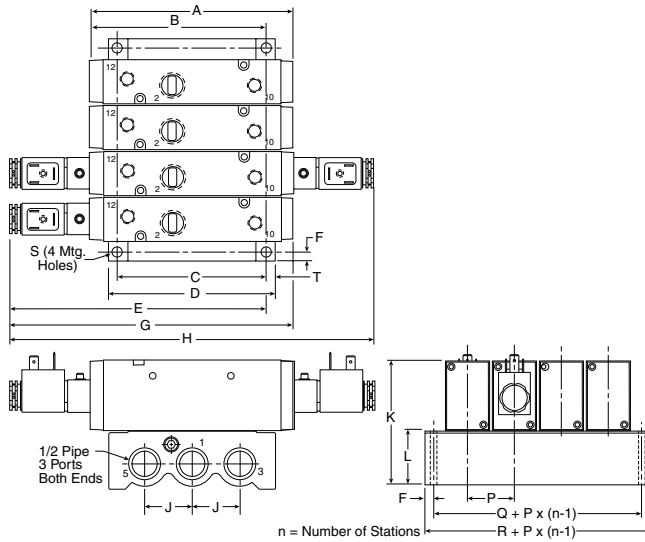


P2LCX 3/2

IEM Aluminum bar manifold

A	B	C	D	E
5.51 (140)	4.96 (126)	3.94 (100)	4.41 (112)	7.11 (180.5)
F	G	H	J	K
.24 (6)	7.66 (194.5)	9.80 (249)	1.26 (32)	3.43 (87)
L	P	Q	R	S
1.54 (39)	1.24 (31.5)	1.77 (45)	2.24 (57)	Ø .26 (6.5)
T				
.24 (6)				

Inches (mm)

P2LCX 5/2 & 5/3 Single & Double Operators – IEM Aluminum Bar Manifold

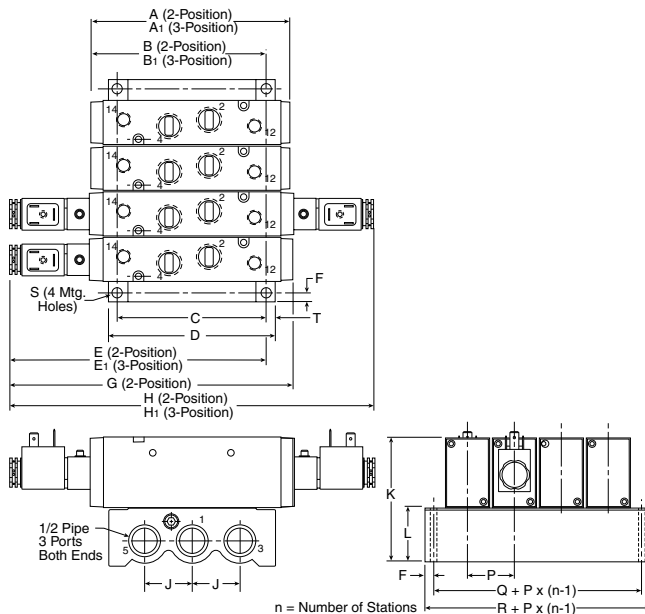

P2PCX 5/2 & 5/3

IEM Aluminum bar manifold

A	A ₁	B	B ₁	C
5.51 (140)	6.38 (162)	4.72 (120)	5.16 (131)	3.94 (100)
D	E	E ₁	F	G
4.41 (112)	6.89 (170)	7.13 (181)	.24 (6)	7.68 (195)
H	H ₁	J	K	L
9.84 (250)	10.71 (272)	1.26 (32)	3.43 (87)	1.54 (39)
P	Q	R	S	T
1.24 (31.5)	1.77 (45)	2.24 (57)	Ø .26 (6.5)	.24 (6)

Inches (mm)

D

Viking Lite


Viking Xtreme

B

ADEX

N

P2LDX 3/2 Single & Double Operators – Solenoid

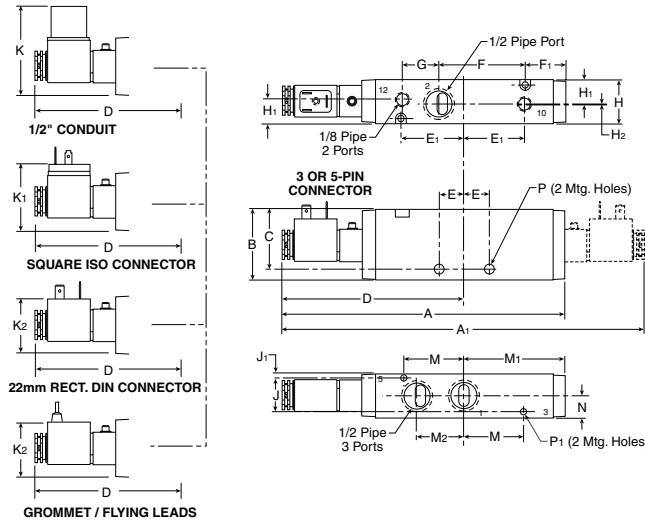


P2LDX 3/2 (solenoid)

A	A ₁	B	C	D
7.66 (194.5)	9.80 (249)	1.89 (48)	1.59 (40.5)	4.90 (124.5)
E	E ₁	F	F ₁	G
.67 (17)	1.65 (42)	2.36 (60)	1.08 (27.5)	.98 (25)
H	H ₁	H ₂	J	J ₁
1.18 (30)	.67 (17)	.02 (0.5)	.91 (23)	.14 (3.5)
K	K ₁	K ₂	M	M ₁
2.52 (64)	1.77 (45)	1.65 (42)	1.65 (42)	2.76 (70)
M ₂	N	P	P ₁	
1.30 (33)	.59 (15)	Ø .26 (Ø 6.6)	Ø .17 (Ø 4.4)	

Inches (mm)

P2LDX 3/2 Single & Double Operators – Remote Pilot

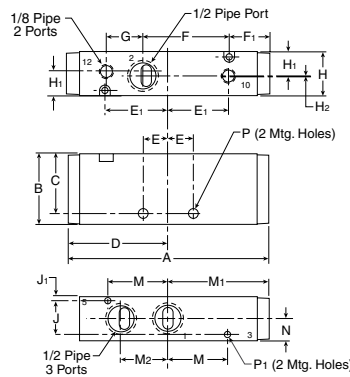


P2LDX 3/2 (remote)

A	B	C	D	E
5.51 (140)	1.89 (48)	1.59 (40.5)	2.76 (70)	.67 (17)
E ₁	F	F ₁	G	H
1.65 (42)	2.36 (60)	1.08 (27.5)	.98 (25)	1.18 (30)
H ₁	H ₂	J	J ₁	M
.67 (17)	.02 (0.5)	.91 (23)	.14 (3.5)	1.65 (42)
M ₁	M ₂	N	P	P ₁
2.76 (70)	1.30 (33)	.59 (15)	Ø .26 (Ø 6.6)	Ø .17 (Ø 4.4)

Inches (mm)

P2LDX 5/2 & 5/3 Single & Double Operators – Solenoid

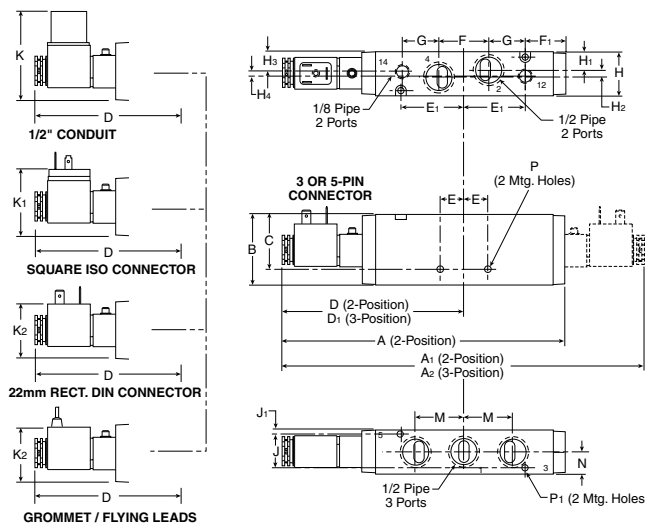


P2LDX 5/2 & 5/3 (solenoid)

A	A ₁	A ₂	B	C
7.67 (195)	9.84 (250)	10.7 (272)	1.89 (48)	1.59 (40.5)
D	D ₁	E	E ₁	F
4.92 (125)	5.79 (147)	.67 (17)	1.65 (42)	1.34 (34)
F ₁	G	H	H ₁	H ₂
1.10 (28)	.98 (25)	1.18 (30)	.49 (12.5)	.20 (5)
H ₃	H ₄	J	J ₁	K
.51 (13)	.16 (4)	.91 (23)	.14 (3.5)	2.52 (64)
K ₁	K ₂	M	N	P
1.77 (45)	1.65 (42)	1.30 (33)	.59 (15)	Ø .26 (Ø 6.6)
P ₁				
Ø .17 (Ø 4.4)				

Inches (mm)

P2LDX 5/2 & 5/3 Single & Double Operators – Remote Pilot

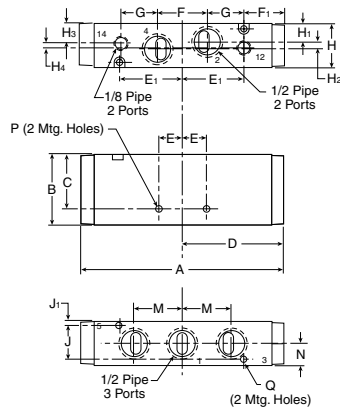

P2LDX 5/2 & 5/3 (remote)

A	B	C	D	E
5.47 (139)	1.89 (48)	1.59 (40.5)	2.63 (67)	.67 (17)
E₁	F	F₁	G	H
1.65 (42)	1.34 (34)	1.08 (27.5)	.98 (25)	1.18 (30)
H₁	H₂	H₃	H₄	J
.49 (12.5)	.20 (5)	.51 (13)	.16 (4)	.91 (23)
J₁	P	M	N	Q
.14 (3.5)	Ø .26 Ø (6.6)	1.29 (32.7)	.59 (15)	Ø .17 Ø (4.4)

Inches (mm)

D

Viking
Lite

Viking
Xtreme

B

ADEX

N



"B" Series

Air Control Valves

- B3 – .75 Cv 1/8", 1/4" Port
- B5 – 1.40 Cv 1/4", 3/8" Port
- B6 – 2.70 Cv 3/8" Port
- B7 – 5.90 Cv 1/2" Port
- B8 – 7.00 Cv 3/4" Port

Section D

www.parker.com/pneu/b



D

Viking Lite

Viking Xtreme

B

ADEX


N

Basic Valve Functions	D40-D41	Valve Options	D56-D57
Basic Valve Features	D42-D43	Electrical Connectors / Accessories.....	D58-D59
Common Part Numbers.....	D44-D45	Technical Information.....	D60-D62
Model Number Index	D46-D49	Solenoid Repair Kits.....	D63
Manifold / Subbases.....	D50-D53	Exploded Views & Kits.....	D64-D67
Accessories	D54	Dimensions.....	D68-D84
Sandwich Regulators	D55	Definitions & Weights	D85

BOLD ITEMS ARE MOST POPULAR.




Single Solenoid
4-Way, 2-Position



De-energized position – Solenoid operator #14 de-energized. Pressure at inlet port 1 connected to outlet port 2. Outlet port 4 connected to exhaust port 5.

Energized position – Solenoid operator #14 energized. Pressure at inlet port 1 connected to outlet port 4. Outlet port 2 connected to exhaust port 3.


Single Remote Pilot
4-Way, 2-Position



Normal position – Pressure at inlet port 1 connected to outlet port 2. Outlet port 4 connected to exhaust port 5.

Operated position – Maintained air signal at port 14. Pressure at inlet port 1 connected to outlet port 4. Outlet port 2 connected to exhaust port 3.


Double Solenoid
4-Way, 2-Position



Solenoid operator #14 energized last. Pressure at inlet port 1 connected to outlet port 4. Outlet port 2 connected to exhaust port 3.

Solenoid operator #12 energized last. Pressure at inlet port 1 connected to outlet port 2. Outlet port 4 connected to exhaust port 5.


Double Remote Pilot
4-Way, 2-Position



Momentary air signal at port 14 last. Pressure at inlet port 1 connected to outlet port 4. Outlet port 2 connected to exhaust port 3.

Momentary air signal at port 12 last. Pressure at inlet port 1 connected to outlet port 2. Outlet port 4 connected to exhaust port 5.

Double Solenoid
4-Way, 3-Position

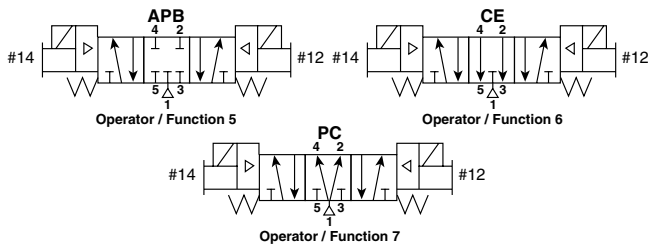

With #12 operator energized – inlet port 1 connected to cylinder port 2, cylinder port 4 connected to exhaust port 5.

With #14 operator energized – inlet port 1 connected to cylinder port 4, cylinder port 2 connected to exhaust port 3.

Function 5: All Ports Blocked

All ports blocked in the center position.


Function 6: Center Exhaust

Cylinder ports 2 and 4 connected to exhaust ports 3 and 5 in center position. Port 1 is blocked.

Function 7: Pressure Center

Pressure port 1 connected to cylinder ports 2 and 4, and exhaust ports 3 and 5 blocked in center position.

Double Remote Pilot
4-Way, 3-Position

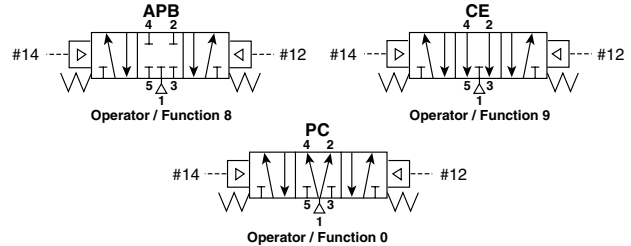

With #12 operator signaled – inlet port 1 connected to cylinder port 2, cylinder port 4 connected to exhaust port 5.

With #14 operator signaled – inlet port 1 connected to cylinder port 4, cylinder port 2 connected to exhaust port 3.

Function 8: All Ports Blocked

All ports blocked in the center position.

Function 9: Center Exhaust

Cylinder ports 2 and 4 connected to exhaust ports 3 and 5 in center position. Port 1 is blocked.

Function 0: Pressure Center

Pressure port 1 connected to cylinder ports 2 and 4, and exhaust ports 3 and 5 blocked in center position.

Dual Pressure:

May be used for dual pressure service with pressure at ports 3 & 5. (Use either external pilot source option "K", "W" or "X", or dual pressure pilot source option "D" or "E".) If pilot source "D" or "E" is selected, the high pressure must be at port #3. If pilot source "K", "W" or "X" is selected, the external pilot must be plumbed to port #14 or "X" respectively. NOTE: The "B6" valve is also available with dual pressure using Port 5 for high pressure (Option "G" & "H"). This is only to be used if converting from a "42" ("CM") Series traditional valve.

In the 3-Position valve, the effect of dual pressure is extremely important when the valve is in the center position, as the CE and PC functions are reversed. Therefore, care should be used when selecting a 3-Position valve.

D


Viking
 Lite
 Viking
 Xtreme

B

ADEX

N

**Single Solenoid
3-Way, 2-Position
NC (NNP)**




Normally Closed:

De-energized position – Solenoid #12 de-energized. Pressure at inlet port 1 blocked, outlet port 2 connected to exhaust port 3.

Energized position – Solenoid #12 energized. Pressure at inlet port 1 connected to outlet port 2, exhaust port 3 is blocked.

**Single Remote Pilot
3-Way, 2-Position
NC (NNP)**




Normally Closed:

Normal position – Pressure at inlet port 1 blocked, outlet port 2 connected to exhaust port 3.

Operated position – Maintained air signal at port 12. Pressure at inlet port 1 connected to outlet port 2, exhaust port 3 is blocked.

**Single Solenoid
3-Way, 2-Position
NO (NP)**




Normally Open:

De-energized position – Solenoid #10 de-energized. Pressure at inlet port 1 connected to outlet port 2, exhaust port 3 is blocked.

Energized position – Solenoid #10 energized. Pressure at inlet port 1 blocked, outlet port 2 connected to exhaust port 3.

**Single Remote Pilot
3-Way, 2-Position
NO (NP)**




Normally Open:

Normal position – Pressure at inlet port 1 connected to outlet port 2, exhaust port 3 is blocked.

Operated position – Maintained air signal at port 10. Pressure at inlet port 1 blocked, outlet port 2 connected to exhaust port 3.


**Double Solenoid
3-Way, 2-Position**



Solenoid operator #12 energized last. Pressure at inlet port 1 connected to outlet port 2, exhaust port 3 is blocked.

Solenoid operator #10 energized last. Pressure at inlet port 1 blocked, outlet port 2 connected to exhaust port 3.

**Double Remote Pilot
3-Way, 2-Position**



Momentary air signal at port 12 last. Pressure at inlet port 1 connected to outlet port 2, exhaust port 3 is blocked.

Momentary air signal at port 10 last. Pressure at inlet port 1 blocked, outlet port 2 connected to exhaust port 3.

D

Viking Lite

Viking Xtreme

B

ADEX

N

3-Way Configuration


B6, B7, B8:
Looking at the #1 and #3 ports, the solenoid (or remote operator) is always on the #3 port end. Different spools are used for NO and NC functions.

B3, B5:
Looking at the #1 and #3 ports, the solenoid (or remote operator) is on the #3 port end for NC and the #1 port end for NO. The same spool is used for both.

WCS

Wear Compensation System

- **Maximum Performance**
 - Low Friction
 - Lower Operating Pressures
 - Fast Response
 - Less Wear
- **Long Cycle Life** - Under pressure, radial expansion of the seal occurs to maintain sealing contact with the valve bore.
- **Non-Lube Service** - No lubrication required for continuous valve shifting.
- **Bi-Directional Spool Seals** - Common spool used for any pressure, including vacuum.

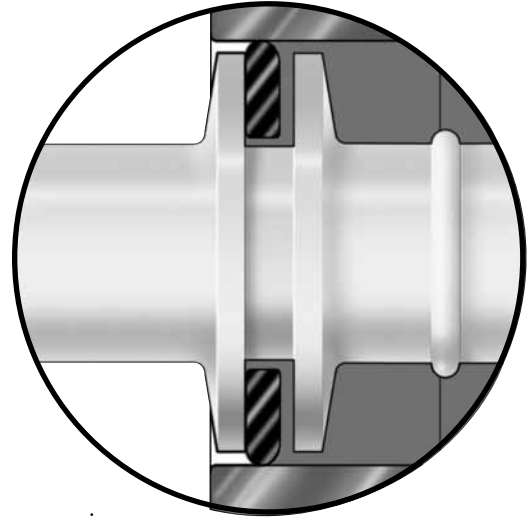

D

Viking
Life

Viking
Xtreme

B

ADEX

N

Refer to www.parker.com/pneu/b
Click on Catalog B Series-E/USA

“B” Series

Flow Characteristics

- B3: .75 Cv
- B5: 1.40 Cv
- B6: 2.50 Cv
- B7: 5.90 Cv
- B8: 7.00 Cv

Operating Pressure

- Vacuum to 145 PSIG

Ports

- B3: 1/8, 1/4 Inch
- B5: 1/4, 3/8 Inch
- B6: 3/8 Inch
- B7: 1/2 Inch
- B8: 3/4 Inch

Mounting

- Inline
- Subbase
- IEM Stackable Base
- IEM Aluminum Bar
- 5-Port Subbase Aluminum Bar


Solenoids

- 1.2 Watt – 15mm 3-Pin
(EN 175301-803)
- 2.5 to 7.3 Watt –
Conduit, Grommet, 22mm &
30mm 3-Pin DIN (43650)
- 12VDC to 240VAC
- Female DIN
Electrical Connectors


Certification / Approval

- Approved to be CE marked
- IP65 Rated
- CSA C/US*


* See catalog technical section for more information.

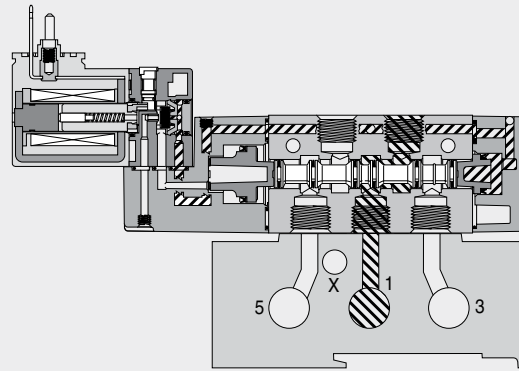


B3 Single Solenoid IEM Aluminum Bar Manifold
 Shown De-Energized

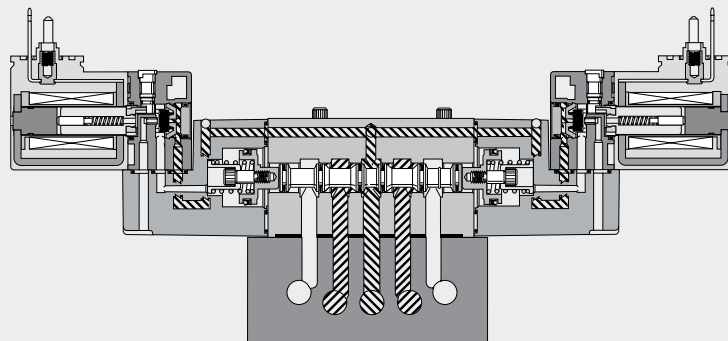

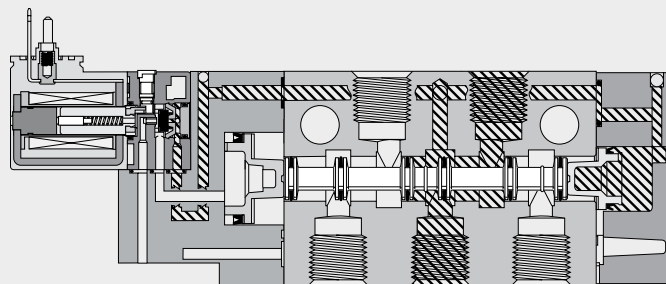

B3 Double Solenoid 3-Position Subbase Mounted
 Shown De-Energized

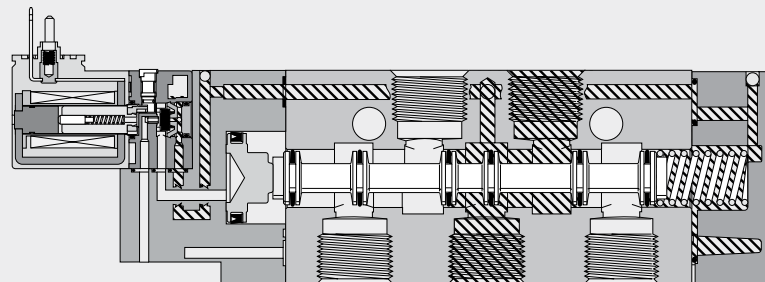

B5 Single Solenoid Inline - Air Return
 Shown De-Energized



B6, B7 & B8 Single Solenoid Inline - Spring / Air Return
 Shown De-Energized

 Pressure  Exhaust

D

Viking
Lite


Viking
Xtreme

B

ADEX

N

Single Solenoid
4-Way, 2-Position




Inline

B3	B310BB553C B310BB549C	120VAC 24VDC	1/8"	0.75 Cv
B5	B511BB553C B511BB549C	120VAC 24VDC	1/4"	1.4 Cv
	B512BB553C B512BB549C	120VAC 24VDC	3/8"	
	B6	B612BB553A B612BB549A	120VAC 24VDC	
B7	B713BB553A B713BB549A	120VAC 24VDC	1/2"	5.9 Cv
B8	B814BB553A B814BB549A	120VAC 24VDC	3/4"	7.0 Cv

Subbase

B3	B31VBB553C B31VBB549C	120VAC 24VDC	Less Base	0.65 Cv
-----------	--	-----------------	--------------	---------

Double Solenoid
4-Way, 2-Position




Inline

B3	B320BB553C B320BB549C	120VAC 24VDC	1/8"	0.75 Cv
B5	B521BB553C B521BB549C	120VAC 24VDC	1/4"	1.4 Cv
	B522BB553C B522BB549C	120VAC 24VDC	3/8"	
	B6	B622BB553A B622BB549A	120VAC 24VDC	
B7	B723BB553A B723BB549A	120VAC 24VDC	1/2"	5.9 Cv
B8	B824BB553A B824BB549A	120VAC 24VDC	3/4"	7.0 Cv

Subbase

B3	B32VBB553C B32VBB549C	120VAC 24VDC	Less Base	0.65 Cv
-----------	--	-----------------	--------------	---------

Single Solenoid
3-Way, 2-Position, NC




Inline

B3	B3G0BB553C B3G0BB549C	120VAC 24VDC	1/8"	0.75 Cv
B5	B5G1BB553C B5G1BB549C	120VAC 24VDC	1/4"	1.4 Cv
	B5G2BB553C B5G2BB549C	120VAC 24VDC	3/8"	
	B6	B6V2BB553A B6V2BB549A	120VAC 24VDC	
B7	B7V3BB553A B7V3BB549A	120VAC 24VDC	1/2"	5.9 Cv
B8	B8V4BB553A B8V4BB549A	120VAC 24VDC	3/4"	7.0 Cv

3-Pin DIN 43650C Electrical Connection.
 Non-Locking Flush Override.

Double Solenoid
4-Way, 3-Position, APB



Inline

B3	B350BB553C B350BB549C	120VAC 24VDC	1/8"	0.60 Cv
B5	B551BB553C B551BB549C	120VAC 24VDC	1/4"	1.1 Cv
	B552BB553C B552BB549C	120VAC 24VDC	3/8"	
	B6	B652BB553A B652BB549A	120VAC 24VDC	
B7	B753BB553A B753BB549A	120VAC 24VDC	1/2"	5.7 Cv
B8	B854BB553A B854BB549A	120VAC 24VDC	3/4"	6.6 Cv

Subbase

B3	B35VBB553C B35VBB549C	120VAC 24VDC	Less Base	0.50 Cv
-----------	--	-----------------	--------------	---------

D

Viking
Lite

Viking
Xtreme


B

ADEX

N

Single Remote Pilot

4-Way, 2-Position



Inline


B3	B330000XXC	1/8"	0.75 Cv
B5	B531000XXC	1/4"	1.4 Cv
	B532000XXC	3/8"	
B6	B632000XXA	3/8"	2.7 Cv
B7	B733000XXA	1/2"	5.9 Cv
B8	B834000XXA	3/4"	7.0 Cv

Subbase

B3	B33V000XXC	Less Base	0.65 Cv
-----------	-------------------	-----------	---------

Double Remote Pilot

4-Way, 2-Position



Inline


B3	B340000XXC	1/8"	0.75 Cv
B5	B541000XXC	1/4"	1.4 Cv
	B542000XXC	3/8"	
B6	B642000XXA	3/8"	2.7 Cv
B7	B743000XXA	1/2"	5.9 Cv
B8	B844000XXA	3/4"	7.0 Cv

Subbase

B3	B34V000XXC	Less Base	0.65 Cv
-----------	-------------------	-----------	---------

Single Remote Pilot

3-Way, 2-Position, NC




Inline

B3	B3K0000XXC	1/8"	0.75 Cv
B5	B5K1000XXC	1/4"	1.4 Cv
	B5K2000XXC	3/8"	
B6	B6X2000XXA	3/8"	2.7 Cv
B7	B7X3000XXA	1/2"	5.9 Cv
B8	B8X4000XXA	3/4"	7.0 Cv

Double Remote Pilot

4-Way, 3-Position, APB



Inline

B3	B380000XXC	1/8"	0.60 Cv
B5	B581000XXC	1/4"	1.1 Cv
	B582000XXC	3/8"	
B6	B682000XXA	3/8"	2.1 Cv
B7	B783000XXA	1/2"	5.7 Cv
B8	B884000XXA	3/4"	6.6 Cv

Subbase

B3	B38V000XXC	Less Base	0.50 Cv
-----------	-------------------	-----------	---------

D

Viking Lite

Viking Xtreme

B

ADEX

N

B3 Series

BOLD OPTIONS ARE MOST POPULAR.

B3 1 0 B B 5 49 - C

Basic Series	
B3 Series	B3

Engineering Level	
C	Current

Operator Function	
3-Way	
Single Solenoid, 2-Position NC - Air Return	G
Single Solenoid, 2-Position NO - Air Return	H
Double Solenoid, 2-Position	J
Single Remote Pilot, 2-Position NC - Air Return	K
Single Remote Pilot, 2-Position NO - Air Return	L
Double Remote Pilot, 2-Position	M
Single Solenoid, 2-Position NC - Air Return / Spring Assist	V
Single Solenoid, 2-Position NO - Air Return / Spring Assist	W
Single Remote Pilot, 2-Position NC - Air Return / Spring Assist	X
Single Remote Pilot, 2-Position NO - Air Return / Spring Assist	Y
4-Way	
Single Solenoid, 2-Position - Air Return	1
Double Solenoid, 2-Position	2
Single Remote Pilot, 2-Position - Air Return	3
Double Remote Pilot, 2-Position	4
Double Solenoid, 3-Position - APB	5
Double Solenoid, 3-Position - CE	6
Double Solenoid, 3-Position - PC	7
Double Remote Pilot, 3-Position - APB	8
Double Remote Pilot, 3-Position - CE	9
Double Remote Pilot, 3-Position - PC	0
Single Solenoid, 2-Position - Air Return / Spring Assist	E
Single Remote Pilot, 2-Position - Air Return / Spring Assist	F

Options	
Blank	None
02	Solenoid Rotated 180° - Pins Down

	AC		DC
	60Hz	50Hz	
42	24	22	
45			12
49			24
53	120	110	
57	240	230	
XX	Remote Pilot - M5 or Valve Less 15mm Solenoid		
YY	Remote Pilot - 5/32" (4mm) Tube		

Enclosure / Lead Length	
0	None, Remote Pilot Valve
5	15mm 3-Pin DIN 43650C (Male Only)
X	Valve Less 15mm Solenoid

Overrides [§]	
0	None, Remote Pilot Valve
B	Flush - Non-Locking
C	Flush - Locking
D	Extended - Non-Locking
E	Extended - Locking
X	Valve Less 15mm Solenoid

Port Size / Thread Type	
3-Way	
1/8" NPT Inline	0*
1/8" BSPP "G" Inline	5*
4-Way	
1/8" NPT Inline	0*
1/8" BSPP "G" Inline	5*
1/4" NPT Subbase	H†
1/8" NPT Face Mount	T**
Subbase Valve Less Base	V‡

Pilot Source / Pilot Exhaust	
0	None, Remote Pilot Valve
B†	Internal - Port #1 / Vented
E*	Dual Pressure - Port #3 / Vented
K†	External - Body / Tapped M5
X‡	External - Manifold / Vented

* Available for use on IEM Manifolds.
 ** 4-Way only.
 ‡ Subbase valves available for 4-Way valves only.

§ Enclosure '5'
 - Override / Voltage Availability
 S - Standard
 O - Option

Voltage Code	Override Code			
	B	C	D	E
42	O	O	-	-
45	O	O	-	-
49	S	S	O	O
53	S	S	O	O
57	O	O	-	-

Voltage Code	"02" Option			
	B	C	D	E
42	O	O	-	-
45	O	O	-	-
49	S	S	O	O
53	S	S	O	O
57	O	O	-	-

Pilot Source 'X'
 External-Manifold / Vented

INLINE & SUBBASE Valves -

Only used IF an IEM or 5-Ported Subbase Aluminum Bar Manifold requires a common external pilot signal thru the manifold for low pressure / vacuum applications OR when used with Sandwich Regulators.



D

Viking Lite

Viking Xtreme

B

ADEX

N

B5 Series

BOLD OPTIONS ARE MOST POPULAR.

B5 1 1 B B 5 49 - C

Basic Series	
B5 Series	B5

Engineering Level	
C	Current

Operator Function	
3-Way	
Single Solenoid, 2-Position NC - Air Return	G
Single Solenoid, 2-Position NO - Air Return	H
Double Solenoid, 2-Position	J
Single Remote Pilot, 2-Position NC - Air Return	K*
Single Remote Pilot, 2-Position NO - Air Return	L*
Double Remote Pilot, 2-Position	M*
Single Solenoid, 2-Position NC - Air Return / Spring Assist	V
Single Solenoid, 2-Position NO - Air Return / Spring Assist	W
Single Remote Pilot, 2-Position NC - Air Return / Spring Assist	X*
Single Remote Pilot, 2-Position NO - Air Return / Spring Assist	Y*
4-Way	
Single Solenoid, 2-Position - Air Return	1
Double Solenoid, 2-Position	2
Single Remote Pilot, 2-Position - Air Return	3*
Double Remote Pilot, 2-Position	4*
Double Solenoid, 3-Position - APB	5
Double Solenoid, 3-Position - CE	6
Double Solenoid, 3-Position - PC	7
Double Remote Pilot, 3-Position - APB	8*
Double Remote Pilot, 3-Position - CE	9*
Double Remote Pilot, 3-Position - PC	0*
Single Solenoid, 2-Position - Air Return / Spring Assist	E
Single Remote Pilot, 2-Position - Air Return / Spring Assist	F*

* Pilot Source / Pilot Exhaust, Override, and Enclosure must be "0".

Port Size / Thread Type	
3-Way	
1/4" NPT Inline	1*
3/8" NPT Inline	2*
1/4" BSPP "G" Inline	6*
3/8" BSPP "G" Inline	7*
4-Way	
1/4" NPT Inline	1*
3/8" NPT Inline	2*
1/4" BSPP "G" Inline	6*
3/8" BSPP "G" Inline	7*
3/8" NPT Subbase	J†
1/4" NPT NAMUR Mount	T††
Subbase Valve Less Base - NPT	V‡
1/4" BSPP "G" NAMUR Mount	W††

* Available for use on IEM Manifolds.
 † 4-Way only.
 ‡ Available with pilot source "0", "A", and "B" only.

Pilot Source / Pilot Exhaust	
Enclosures "0, 5 & X"	
None, Remote Pilot Valve	0
Internal - Port #1 / Tapped M5	A†
Internal - Port #1 / Vented	B†
Dual Pressure - Port #3 / Vented	E*
External - Body / Tapped M5	K†
External - Manifold / Vented	X‡
Enclosures "A, B, C, D, E, F, G, H, N, Q & R"	
Internal - Port #1 / Tapped M5	A†
Internal - Port #1 / Vented	B†
Dual Pressure - Port #3 / Tapped M5	D*†
External - Body / Tapped 1/8"	K†

* Not available for 3-Way Valves.
 † Not available for Remote Pilot Valves.
 ‡ See Pilot Source Note below.

Overrides§	
None, Remote Pilot Valve	0
No Override	A†
Flush - Non-Locking	B*
Flush - Locking	C
Extended - Non-Locking	D
Extended - Locking	E*
Valve Less 15mm Solenoid	X

* Only Available with Encl. "5".
 † Only Available with Encl. "E".

Options	
Blank	None
02	Solenoid Rotated 180° - Pins Down
MD††	Manual Detent
VO*	Fluorocarbon Seals

* Not available with Enclosure "0", "5", "X", "E" or "F".
 †† Only Available with Operator Function 1 & 3 and Enclosure "N", "X" or Mobile Voltages upon Request.

	AC		DC
	60Hz	50Hz	
42	24	22	
45			12
49			24
53	120	110	
57	240	230	
XX	Remote Pilot - M5 or Valve Less Solenoid		
YY	Remote Pilot - 5/32" (4mm) Tube		

Enclosure / Lead Length	
0	None, Remote Pilot Valve
5	15mm 3-Pin DIN 43650C (Male Only)
A	30mm Square 3-Pin - ISO 4400 Form A (Male Only)
B	22mm Rectangular 3-Pin - Type B Industrial (Male Only)
C	3-Pin Automotive - Mini
D	5-Pin Automotive - Mini
E*	Intrinsically Safe - 30mm 3-Pin
F**	Hazardous Duty 1/2" NPT Conduit - 18" Leads
G	Grommet - 18" Leads
H	1/2" NPT Conduit - 18" Leads
N	Valve Less "A - R" Coil
Q	Grommet - 72" Leads
R	1/2" NPT Conduit - 72" Leads
X	Valve Less 15mm Solenoid

* 24 VDC & Override "A" Only.
 ** 12 VDC, 24 VDC, 120 VAC or 240 VAC.

Note: For Mobile Voltages, Contact the Application Team.

§ Enclosure '5' - Override / Voltage Availability
 S - Standard
 O - Option

Voltage Code	Override Code Standard				Voltage Code	Override Code "02" Option			
	B	C	D	E		B	C	D	E
42	O	O	-	-	42	O	O	-	-
45	O	O	-	-	45	O	O	-	-
49	S	S	O	O	49	S	S	O	O
53	S	S	O	O	53	S	S	O	O
57	O	O	-	-	57	O	O	-	-

D
 Viking Lite
 Viking Xtreme
 B
 ADEX
 N

Pilot Source 'X'
 External-Manifold / Vented or Tapped M5
INLINE & SUBBASE Valves - Only used IF an IEM Aluminum Bar Manifold requires a common external pilot signal thru the manifold for low pressure / vacuum applications.



B6 Series

BOLD OPTIONS ARE MOST POPULAR.

B6 1 2 B B 5 49 - A

Basic Series	
B6 Series	B6

Engineering Level	
A	Current

Operator Function	
3-Way	
Single Solenoid, 2-Position NC - Air Return / Spring Assist	V
Single Solenoid, 2-Position NO - Air Return / Spring Assist	W
Single Remote Pilot, 2-Position NC - Air Return / Spring Assist	X
Single Remote Pilot, 2-Position NO - Air Return / Spring Assist	Y
4-Way	
Single Solenoid, 2-Position - Air Return	1
Double Solenoid, 2-Position	2
Single Remote Pilot, 2-Position - Air Return	3
Double Remote Pilot, 2-Position	4
Double Solenoid, 3-Position - APB	5
Double Solenoid, 3-Position - CE	6
Double Solenoid, 3-Position - PC	7
Double Remote Pilot, 3-Position - APB	8
Double Remote Pilot, 3-Position - CE	9
Double Remote Pilot, 3-Position - PC	0
Single Solenoid, 2-Position - Air Return / Spring Assist	E
Single Remote Pilot, 2-Position - Air Return / Spring Assist	F

Options	
Blank	None
02	Solenoid Rotated 180° - Pins Down
42*	Series Cylinder Mount Replacement

* Only Available with Port Size "T" and "O", "A" and "B" Pilot Source.

	AC		DC
	60Hz	50Hz	
42	24	22	
45			12
49			24
53	120	110	
57	240	230	
XX	Remote Pilot - M5 or Valve Less 15mm Solenoid		
YY	Remote Pilot - 5/32" (4mm) Tube		

Port Size / Thread Type	
3-Way / 4-Way	
3/8" NPT Inline	2*
3/8" BSPG "G" Inline	7*
1/4" NPT NAMUR Mount	T†

* Available for use on IEM Manifolds.
 † 4-Way only. Available with pilot source "O", "A" and "B" only.

Pilot Source / Pilot Exhaust	
Enclosures "O, 5 & X"	
None. Remote Pilot Valve	O
Internal - Port #1 / Tapped M5	A†
Internal - Port #1 / Vented	B†
Dual Pressure - Port #5 / Vented	H*
External - Body / Tapped M5	K†
Enclosures "A, B, C, D, E, F, G, H, N, Q & R"	
Internal - Port #1 / Tapped M5	A†
Internal - Port #1 / Vented	B†
External - Body / Tapped 1/8"	K†

* Not available for 3-Way Valves.
 † Not available for Remote Pilot Valves.

Overrides§	
None, Remote Pilot Valve	O
No Override	A†
Flush - Non-Locking	B*
Flush - Locking	C
Extended - Non-Locking	D
Extended - Locking	E*
Valve Less 15mm Solenoid	X

* Only Available with Encl. "5".
 † Only Available with Encl. "E".

Enclosure / Lead Length	
0	None, Remote Pilot Valve
5	15mm 3-Pin DIN 43650C (Male Only)
A	30mm Square 3-Pin - ISO 4400 Form A (Male Only)
B	22mm Rectangular 3-Pin - Type B Industrial (Male Only)
E*	Intrinsically Safe - 30mm 3-Pin
F**	Hazardous Duty 1/2" NPT Conduit - 18" Leads
G	Grommet - 18" Leads
H	1/2" NPT Conduit - 18" Leads
N	Valve Less "A - R" Coil
Q	Grommet - 72" Leads
R	1/2" NPT Conduit - 72" Leads
X	Valve Less 15mm Solenoid

* 24 VDC & Override "A" Only.
 ** 12 VDC, 24 VDC, 120 VAC or 240 VAC.

§ Enclosure '5' - Override / Voltage Availability
 S - Standard
 O - Option

Voltage Code	Override Code Standard				Voltage Code	Override Code "02" Option			
	B	C	D	E		B	C	D	E
42	O	O	-	-	42	O	O	-	-
45	O	O	-	-	45	O	O	-	-
49	S	S	O	O	49	S	S	O	O
53	S	S	O	O	53	S	S	O	O
57	O	O	-	-	57	O	O	-	-

INLINE Valves -
 Only used IF an IEM Aluminum Bar Manifold requires a common external pilot signal thru the manifold for low pressure / vacuum applications.

D

Viking Lite

Viking Xtreme

B

ADEX

N



B7 & B8 Series

BOLD OPTIONS ARE MOST POPULAR.

B7 1 3 A B G 53 - A

Basic Series	
B7 Series	B7
B8 Series	B8

Engineering Level	
A	Current

Options	
Blank	None

Operator Function	
3-Way	
Single Solenoid, 2-Position NC - Air Return / Spring Assist	V
Single Solenoid, 2-Position NO - Air Return / Spring Assist	W
Single Remote Pilot, 2-Position NC - Air Return / Spring Assist	X
Single Remote Pilot, 2-Position NO - Air Return / Spring Assist	Y
4-Way	
Single Solenoid, 2-Position - Air Return	1
Double Solenoid, 2-Position	2
Single Remote Pilot, 2-Position - Air Return	3
Double Remote Pilot, 2-Position	4
Double Solenoid, 3-Position - APB	5
Double Solenoid, 3-Position - CE	6
Double Solenoid, 3-Position - PC	7
Double Remote Pilot, 3-Position - APB	8
Double Remote Pilot, 3-Position - CE	9
Double Remote Pilot, 3-Position - PC	0
Single Solenoid, 2-Position - Air Return / Spring Assist	E
Single Remote Pilot, 2-Position - Air Return / Spring Assist	F

	Voltage §		
	AC		DC
	60Hz	50Hz	
42	24	22	
45			12
49			24
53	120	110	
57	240	230	
XX	Remote Pilot - M5 or Valve Less Solenoid		
YY	Remote Pilot - 5/32" (4mm) Tube		

Port Size / Thread Type	
B7 Series	
1/2" NPT Inline	3*
1/2" BSPP "G" Inline	8*
B8 Series	
3/4" NPT Inline	4*
3/4" BSPP "G" Inline	9*

* Available for use on IEM Manifolds.

Enclosure / Lead Length	
0	None, Remote Pilot Valve
5	15mm 3-Pin DIN 43650C (Male Only)
A	30mm Square 3-Pin - ISO 4400 Form A (Male Only)
B	22mm Rectangular 3-Pin - Type B Industrial (Male Only)
E*	Intrinsically Safe - 30mm 3-Pin
F**	Hazardous Duty 1/2" NPT Conduit - 18" Leads
G	Grommet - 18" Leads
H	1/2" NPT Conduit - 18" Leads
N	Valve Less "A - R" Coil
R	1/2" NPT Conduit - 72" Leads
X	Valve Less 15mm Solenoid

* 24 VDC & Override "A" Only.
** 12 VDC, 24 VDC, 120 VAC or 240 VAC.

Pilot Source / Pilot Exhaust	
Enclosures "0, 5 & X"	
None, Remote Pilot Valve	0
Internal - Port #1 / Tapped M5	A†
Internal - Port #1 / Vented	B†
External - Body / Tapped M5	K†
Enclosures "A, B, C, D, E, F, G, H, N, Q & R"	
Internal - Port #1 / Tapped M5	A†
Internal - Port #1 / Vented	B†
External - Body / Tapped 1/8"	K†

† Not available for Remote Pilot Valves.

Overrides§	
None, Remote Pilot Valve	0
No Override	A†
Flush - Non-Locking	B*
Flush - Locking	C
Extended - Non-Locking	D
Extended - Locking	E*
Valve Less 15mm Solenoid	X

* Only Available with Encl. "5".
† Only Available with Encl. "E".

§ Enclosure '5'
- Override / Voltage Availability
S - Standard
O - Option

Voltage Code	Override Code			
	B	C	D	E
42	O	O	-	-
45	O	O	-	-
49	S	S	O	O
53	S	S	O	O
57	O	O	-	-



INLINE Valves -
Only used IF an IEM Aluminum Bar Manifold requires a common external pilot signal thru the manifold for low pressure / vacuum applications.

D
Viking Lite
Viking Xtreme
B
ADEX
N

IEM Stackable Manifolds

Series	Type	Kit Number	
		Standard	Flow Control
B3	4-Way	PS2917P	PS2918P
B5	4-Way	PS2817P	PS2818P


- Individual Manifold Bases stack together to form lightweight custom length manifold system.
- Easy-to-connect male / female tie rods for modular assembly.
- Utilizes B3 and B5 4-Way Inline Valves.
- Low-cost built-in Flow Controls with heavy-duty brass adjusting needles to control meter-out exhaust flow.
- Accessories include Isolator Plugs for pressure isolation and Universal Blanking Plates for auxiliary inlet and exhaust supply and future valve additions.
- Kit includes: (1) Manifold Base, (2) Hold-down Bolts, Tie-rods, Gaskets and O-rings.

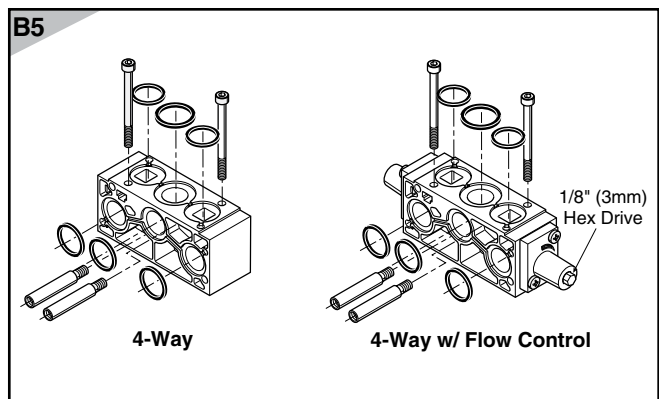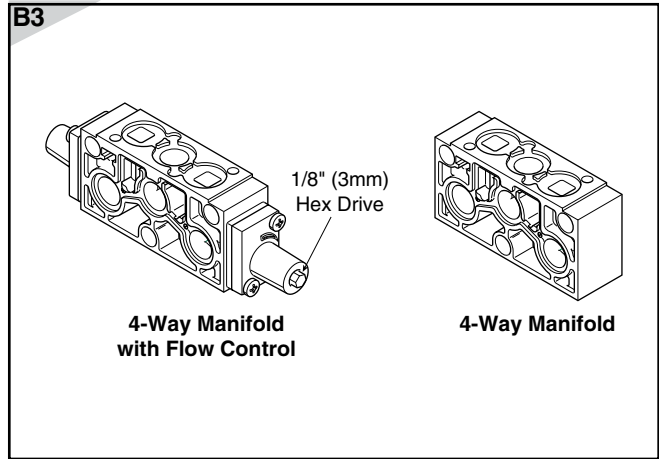

Isolator Plugs

Series	Kit Number
	4-Way
B3	PS2919P
B5	PS2819P

- Used to isolate the #1, #3 or #5 gallery between two Manifold Bases. (IEM STACKABLE ONLY)
- **Kit includes:** (3) plugs and (6) o-rings

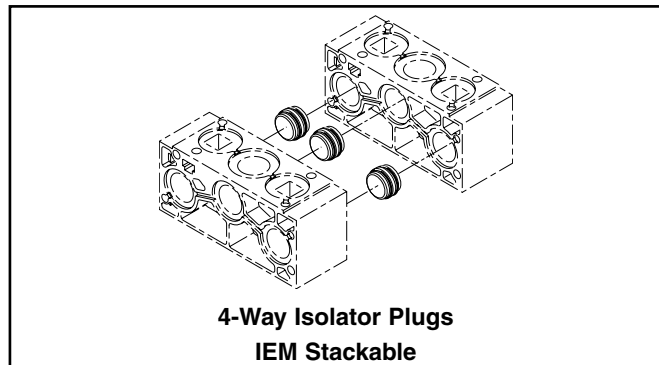


End Plate Kits

Series	Type	Kit Number
		NPT
B3	4-Way	PS2915P
B5	4-Way	PS2815P*

Kit includes: Right and Left End Plate, O-rings, Socket Head Cap Screws, Flat Washers and Lockwashers.

* B5 4-Way use the same Kit.

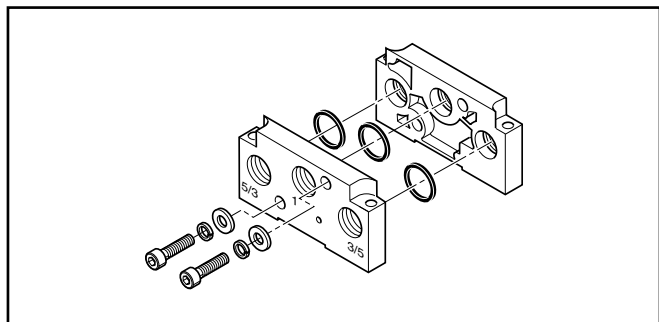

D

Viking
Lite


Viking
Xtreme

B

ADEX


N

B3 Series

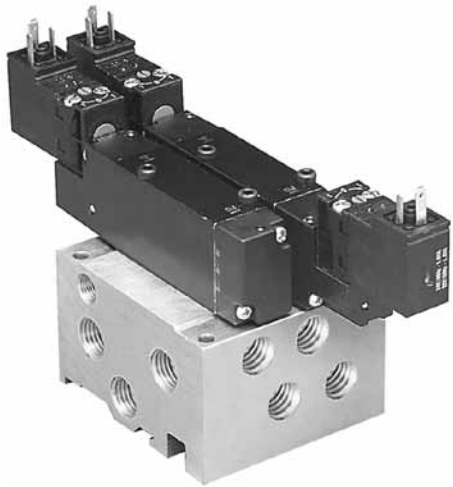

4-Way, 1/8" NPT	AAPSJ3B1N##NP	## – stations 02 to 12
-----------------	----------------------	------------------------

B3 Series

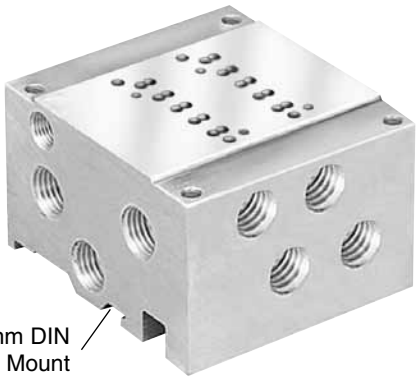

35mm DIN Rail Mount


4-Way, 1/8" NPT	PSJ3B1N##NP	## – stations 02 to 12
-----------------	--------------------	------------------------

- Utilizes Subbase mount B3 valves.
- Available for 4-Way valves. If 3-Way function is required, plug a cylinder port.
- Common External Pilot galley is standard.
- Standard Internal Pilot valves need not use this galley, and the galley does not need to be plugged.
- External Pilot Valves – "X" or "W", must have Common External Galley pressurized.

Kit includes:

Subbase – (1) Manifold (bolts & gasket come with subbase valve).

Assembly Model Number

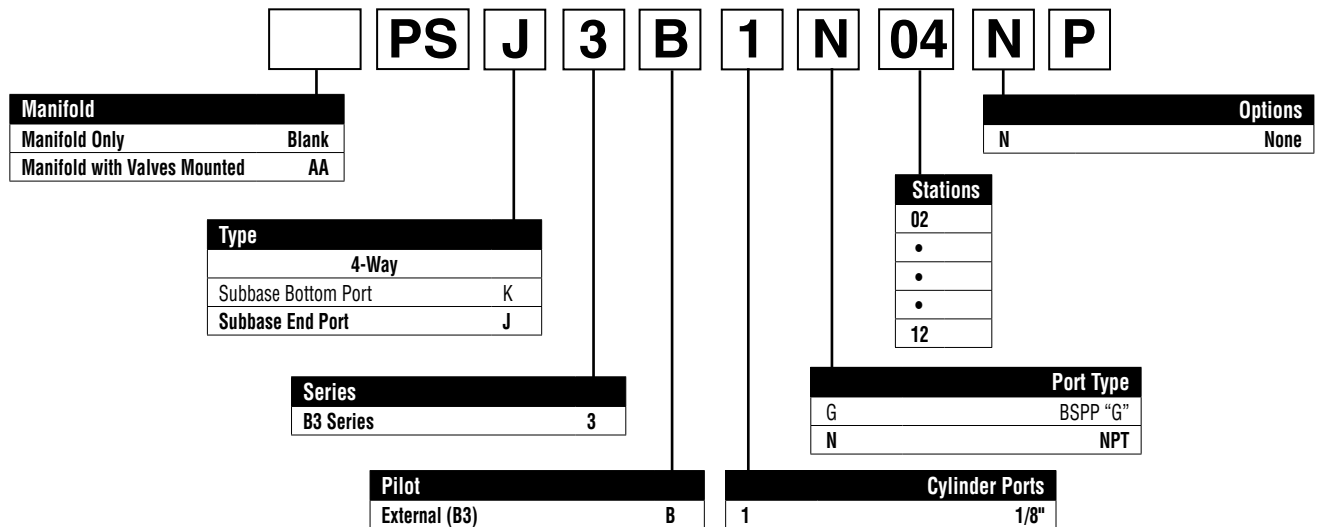

D

Viking Lite





Viking Xtreme

B

ADEX


N


D
 Viking
 Lite
 Viking
 Xtreme
 B
 ADEX
 N

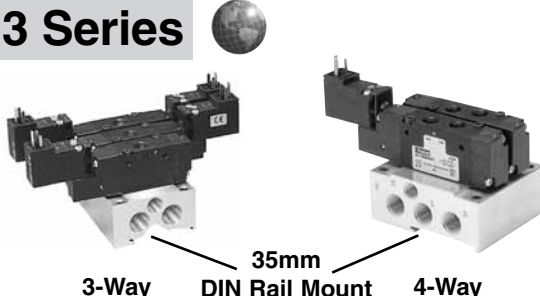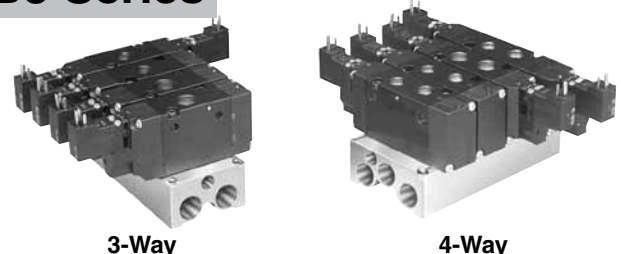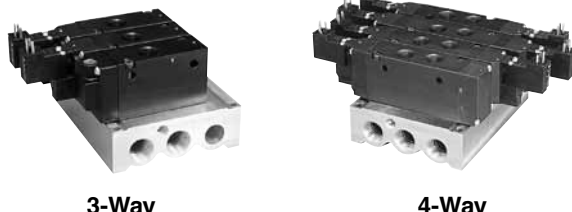B3 Series 			B5 Series 		
3-Way, NPT	AAPSG3BXN##NP	## – stations 02 to 12	3-Way, NPT	AAPSG5BXN##NP	## – stations 02 to 12
4-Way, NPT	AAPSM3BXN##NP		4-Way, NPT	AAPSM5BXN##NP	
B6 Series 			B7 & B8 Series 		
3-Way, NPT	AAPSG6BXN##NP	## – stations 02 to 12	4-Way, NPT	AAPSM7BXN##NP	## – stations 02 to 12
4-Way, NPT	AAPSM6BXN##NP				

- Utilizes Inline mount “B” Series valves.
- Different manifold for 3-Way & 4-Way valves (B7 and B8 use common manifolds).
- Common External Pilot galley is standard. Standard Internal Pilot valves need not use this galley. This galley does not require a plug for internally piloted valves.
- External Pilot Valves – “X” or “W”, must have Common External Galley pressurized.
- **Kits (PS....) include:** (1) Manifold, Valve Hold Down Bolts, Gaskets.

IEM Bar Manifold Model Number

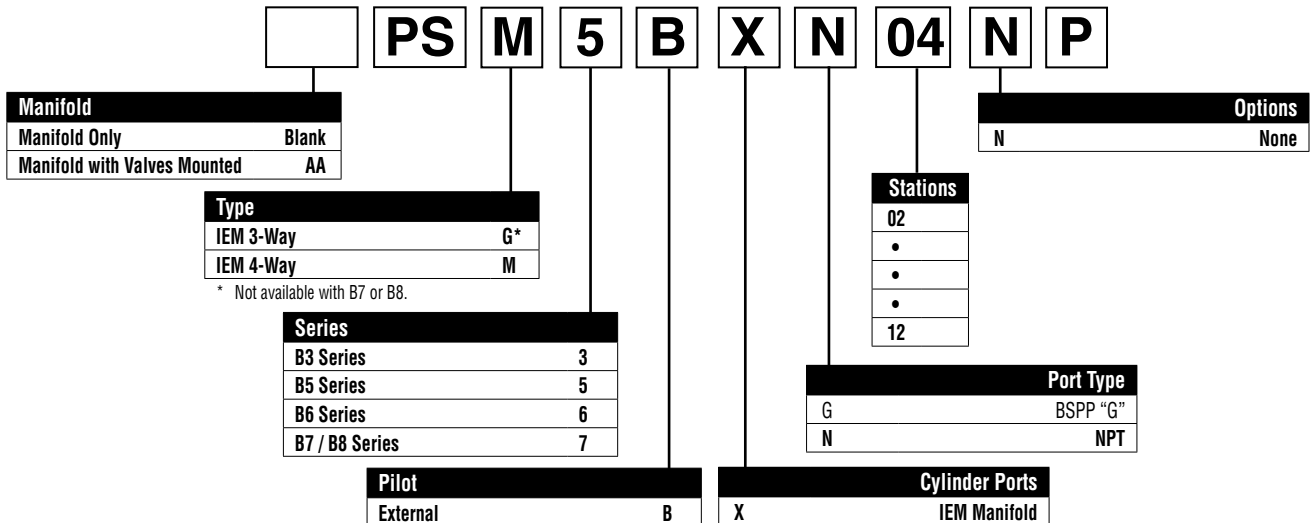


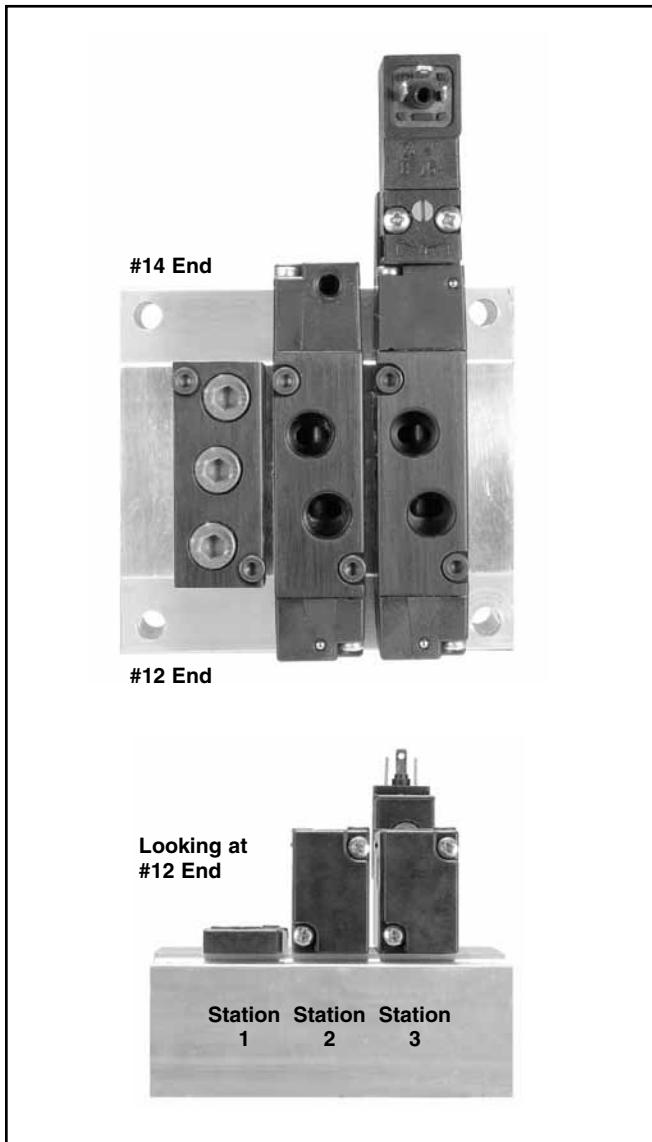

How To Order Aluminum Bar Manifold Assemblies

1. List Manifold Assembly call out. Use AA + the part number of the aluminum bar manifold. This automatically includes the aluminum bar manifold and assembly.
2. List complete valve model number, listing left to right, **LOOKING AT THE #12 END** of the manifold. The left most station is station 1.
 (If a blank station is needed, list the blanking plate part number at the desired station.)

AA PS*****##NP

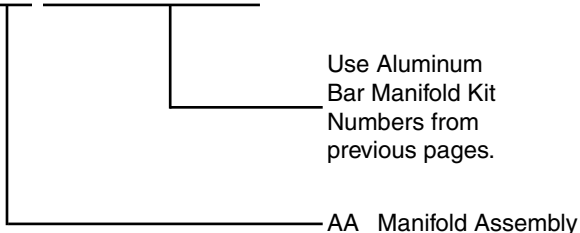

Example: Application requires a 3-station “B3” 4-Way manifold with station #1 blanked off with valves assembled.

<u>Qty.</u>	<u>Part No.</u>	<u>Comment</u>
1	AAPSM3BXN03NP	
1	PS2920P	Station 1
1	B330000XXC.....	Station 2
1	B310BB549C.....	Station 3

D

Viking Lite

Viking Xtreme

B


ADEX

N

Subbase

Type	Size	Kit Number
		NPT
B3 4-Way	1/4"	PS2934P
B5 4-Way	3/8"	PS2834P


Kit includes: (1) subbase.
 (Hold down bolts & gasket are included with valve.)

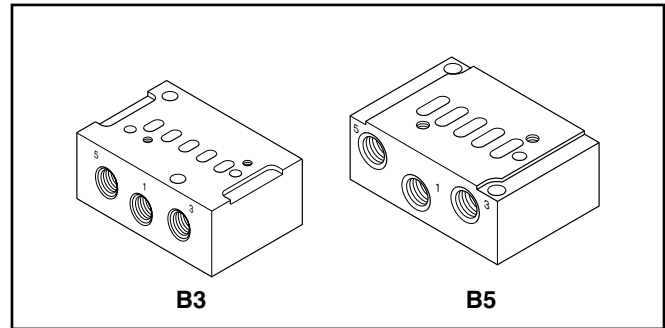

D

Blanking Plate

Type		Kit Number			
		IEM Universal		IEM	Subbase
		NPT	BSPP "G"	Blank	Blank
B3	3-Way	PS2966P	PS2967P	PS2968P	—
	4-Way	PS2920P	PS2921P	PS2969P	PS2994P
B5	3-Way	PS2866P	PS2867P	PS2868P	—
	4-Way	PS2820P	—	PS2869P	—
B6	3-Way	PS2620P	—	—	—
	4-Way		—	—	—
B7	3-Way	PS2520P	—	PS2569P	—
B8	4-Way				

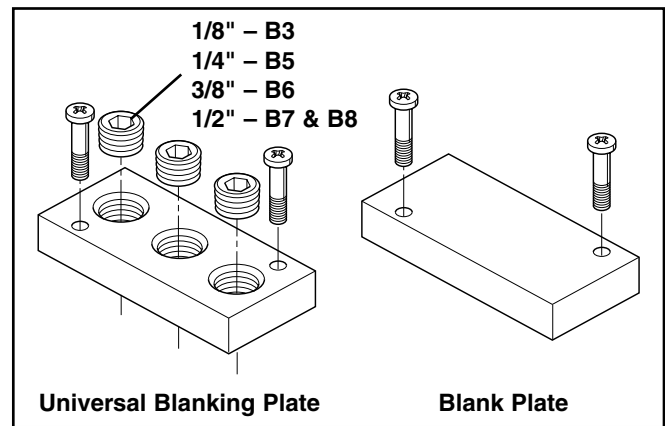

Kit includes:
 (1) Plate, (2) Screws, Seal / Gaskets

Viking Lite

Viking Xtreme

B


ADEX

N

DIN Rail Hardware Kits

Series	Length	Part Number
B3	6 Feet	AM1DE200
Series	IEM Bar	5-Port Subbase Bar
B3	PS2990P	PS2991P


Kit includes: (2) Screws, (2) Nuts, (2) Clamps

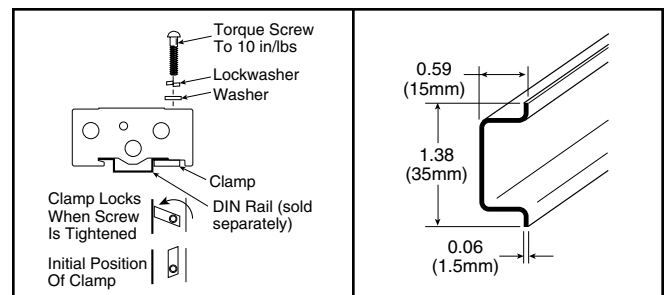

B3 Series

Sandwich Regulators


- Use with B3 Subbase Valves on 5-Ported Subbase Bar Manifolds.
- Common Port or Dual Port regulation control.
- Unregulated Pressure Supplied to Valve Pilot - Use Pilot Source - 'X'.
- Easy adjust knob control.

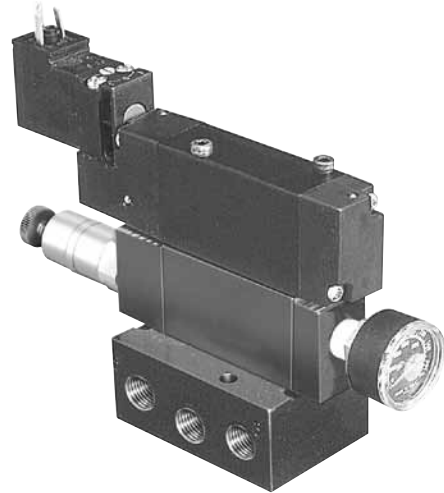


	Common Port with Gauge *	Dual Port without Gauge	Cv
B3 5-125 PSI	PS2930166P	PS2930233P	.33

* Gauge is 160 PSI. Gauge shipped unassembled. For different gauge mounting configuration, use brass adapters listed at bottom of page.

Common Port

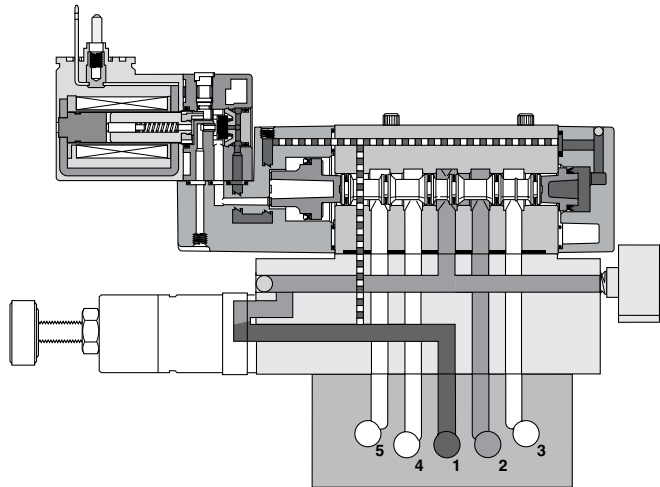

Dual Port

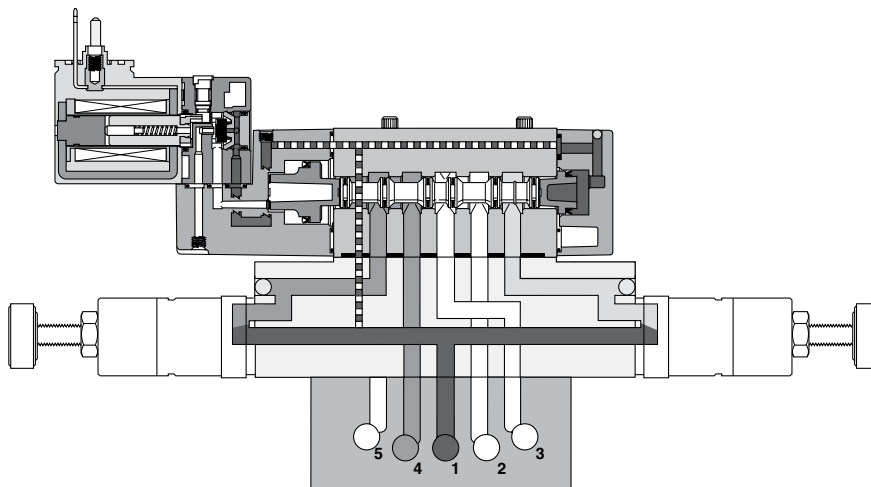

D

Viking Lite

Viking Xtreme

B

ADEX

N

Brass Adapters for Gauge –	
1/8" to 1/8" Female Coupling..... 207P-2	1/8" to 1/8" 45° Female Elbow..... 2201P-2-2
1/8" Male Pipe Nipped 1.5"..... 215PNL-2-15	1/8" to 1/8" 90° Female Elbow..... 2200P-2-2
1/8" Male to Female Adapter..... 222P-2-2	

Gauge 1" Face –
0-160 PSI.....PS4051160BP

Featured Valve Options


“B” Series Valves

Featured Valve Options

Solenoid Rotated 180° - Pins Down

B3 B5 B6 B7 B8

- 1.8W (2.4VA) solenoids – Enclosure “5”.
- Override on top for easy access.
- “02” in the Options code.

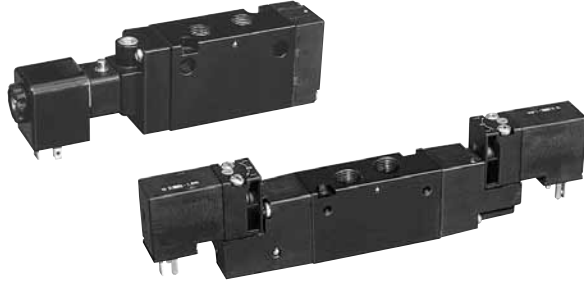

Valve Less Solenoid

B3 B5 B6 B7 B8

- Valve ordered & shipped without solenoid.
- Efficient method in place of valve repair, fully tested at factory.




D

Alternate Solenoid Enclosures

B5 B6 B7 B8

- Enclosure “A”: 2.6W - 4.1VA (Coil rotates in 45° increments)
- Enclosure “B” – “R”: 4.6W - 7.3VA (Coil rotates in 90° increments)



“A” 30mm 3-Pin



“C” 3-Pin Mini



“G”. “Q” Grommet



“B” 22mm 3-Pin



“D” 5-Pin Mini



“F”. “H”. “R” 1/2" Conduit

Viking
Lite

Viking
Xtreme

B

ADEX

N

Tube Fitting Remote Pilot

B3 B5 B6 B7 B8

- “YY” Option
- 5/32" (4mm) Tube Fitting



Intrinsically Safe Solenoid Valves ("E" Option)

Hazardous Location Class:

Class I; Groups A, B, C & D

Class II; Groups E, F, & G

Class III; Div. I

For use in low voltage (24VDC) Intrinsically Safe applications. NO OTHER VOLTAGE IS APPROVED.


36mm Coil width.

Comes standard with non-lighted solenoid connector.

Must be connected to an FM approved Barrier.

For dimensions, reference standard solenoid models.

Maximum internally piloted valve pressure is 115 PSIG. Pressures to 145 PSIG can be used when external pilot is utilized and pilot pressure is limited to 115 PSIG.

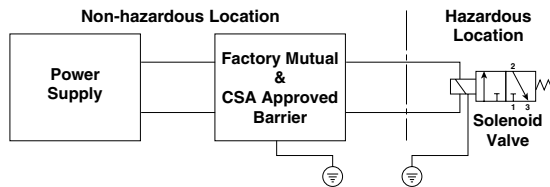

Intrinsically Safe Solenoid Pilot Assembly Kits

Part Number	Description
P2FS13N1AE49	24VDC

Hazardous Duty Solenoid Valves ("F" Option)

Hazardous Location Class:

Class I; Zone I EX, M, II & T4

Class I; Div. I. Groups A, B, C, & D

Class II & III; Div. I. Groups E, F, & G

Comes standard with 1/2" conduit connection.

Voltage Range = $\pm 10\%$

Ambient Temp. Range = -20°C (-4°F) to 60°C (140°F)

Duty Factor = 100%

IP65 Rated (with Connected Conduit Connector)


Notes:

1. Maximum non-hazardous location voltage not to exceed 250V RMS.
2. Connect per Barrier Manufacturers instructions.
3. Factory Mutual requires connections per ISA RP 12.6 instructions.
4. CSA requires "Installation to be in accordance with the Canadian Electrical Code, Part I."
5. The hazardous duty coils are wider in size than both the B5 and the B6 valve. If mounted on a manifold, the valves need to be staggered to fit.



B5 With Manual Detent

- Positive mechanical contact of the override knob assures actuation of valve, however, knob does not move during normal cycling.
- Hard coated override to resist harsh environments.
- Override return spring is stainless steel, for harsh environments.
- Heavy duty locking mechanism to maintain position.
- Use in combination with mobile voltages or valve less solenoid.

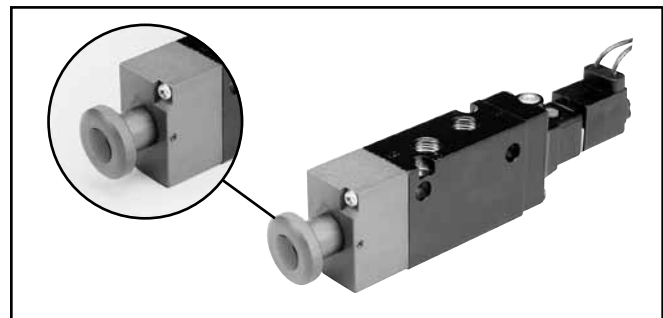

Female Electrical Connectors

15mm 3-Pin DIN 43650C (Use with Enclosure “5”)


Connector	Connector with Cord	Description
PS2932BP	PS2932HBP 18 Inches	Unlighted
PS2932BP	PS2932JBP 6 Feet	Unlighted
PS294675BP	PS2946J75BP* 6 Feet	Light – 12VAC or DC
PS294679BP	PS2946J79BP* 6 Feet	Light – 24VAC or DC
PS294683BP	PS2946J83BP* 6 Feet	Light – 110/120VAC
PS294687BP	N/A	Light – 240/230VAC

* LED with surge suppression.

Note: Max ø6.5mm cable size required for connector w/o 6' (2m) cord.
 IP65 rated when properly installed.

Engineering Data:

- Conductors: 2 Poles Plus Ground
- Cable Range (Connector Only): 4 to 6mm (0.16 to 0.24 Inch)
- Contact Spacing: 8mm

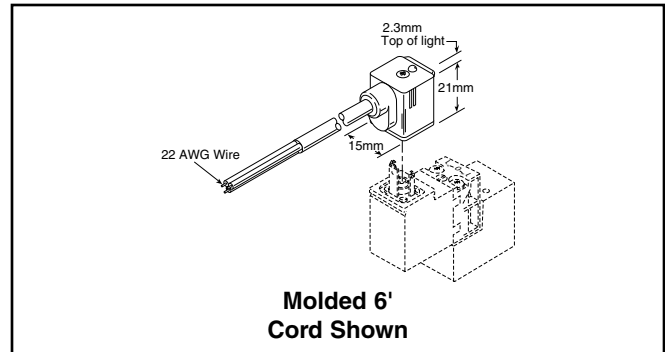

D

Viking
Life

Viking
Xtreme

B


ADEX

N

15mm 3-Pin DIN 43650C to 1/2" Conduit (Use with Enclosure “5”)

Connector	Description
PS2998P	1/2" NPTF Conduit – Unlighted with 3' (1m) Leads 20 AWG Wire


Note: Rated up to 250VAC or VDC; 6 Amps
 IP65 rated when properly installed.

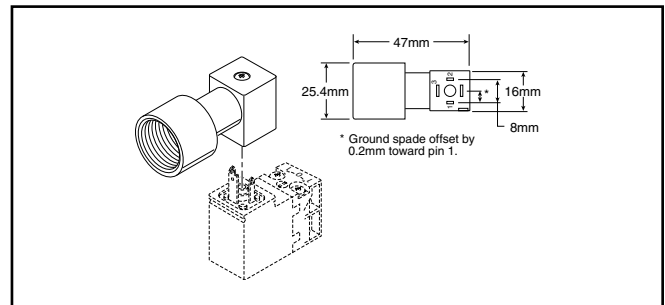

Female Electrical Connectors / Accessories

30mm Square 3-Pin – ISO 4400, DIN 43650A (Use with Enclosure “A”)

Connector	Connector with 6' (2m) Cord	Description
PS2028BP	PS2028JCP	Unlighted
PS203279BP	PS2032J79CP*	Light – 6-48V. 50/60Hz. 6-48VDC
PS203283BP	PS2032J83CP*	Light – 120V/60Hz
PS203283BP	N/A	Light – 240V/60Hz

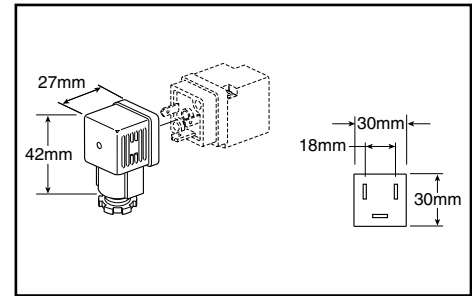

* LED with surge suppression.


Note: Max ø6.5mm cable size required for connector w/o 6' (2m) cord. IP65 rated when properly installed.

Engineering Data:

Conductors: 2 Poles Plus Ground; Cable Range (Connector Only): 8 to 10mm (0.31 to 0.39 Inch); Contact Spacing: 18mm

22mm Rectangular 3-Pin – Type B Industrial (Use with Enclosure “B”)

Connector	Connector with 6' (2m) Cord	Description
PS2429BP	PS2429JBP	Unlighted
PS243079BP	PS2430J79BP*	Light – 24V60Hz. 24VDC
PS243083BP	PS2430J83BP*	Light – 120V/60Hz
PS243087BP	N/A	Light – 240V/60Hz

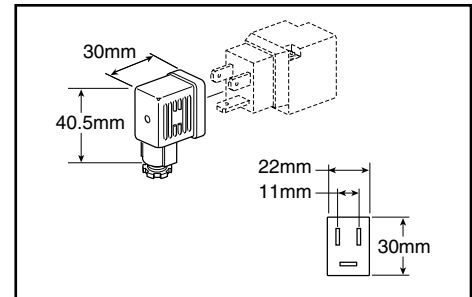

* LED with surge suppression.

Note: Max ø6.5mm cable size required for connector w/o 6' (2m) cord. IP65 rated when properly installed.

Engineering Data:


Conductors: 2 Poles Plus Ground; Cable Range (Connector Only): 6 to 8mm (0.24 to 0.31 Inch); Contact Spacing: 11mm

3-Pin / 5-Pin Male Automotive Connectors (Use on 22mm Rectangular 3-Pin Solenoid)

3-Pin	5-Pin	Description
PS2893CP	PS2893DP	Unlighted
PS2893C##P	PS2893D##P	Lighted - Voltage

— 79 = 6 to 48VAC/VDC


83 = 100 to 240VAC/48 to 120 VDC

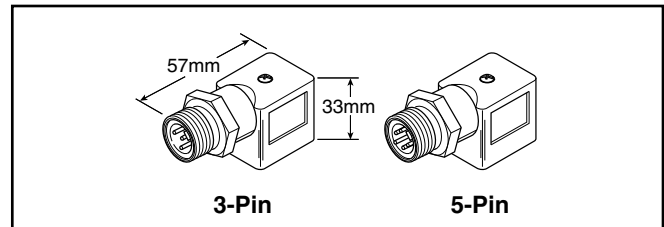

Exhaust Mufflers

Pipe Thread	Part Number
M5	P6M-PAC5
1/8" NPT	EM12
1/4" NPT	EM25
3/8" NPT	EM37
1/2" NPT	EM50

P6M - Plastic; EM - Sintered Bronze

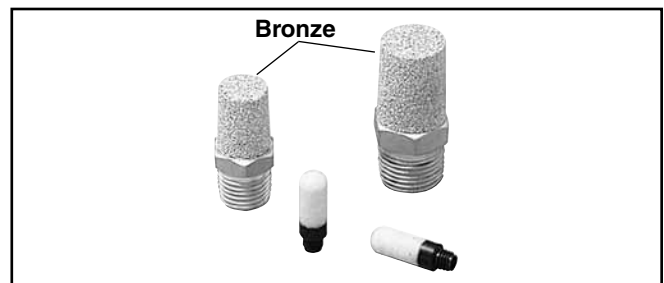

Plastic Silencers

Thread Size	Part Number		A (mm)	B (mm)
	NPT	BSPT		
M5	AS-5		.43 (11)	.32 (8)
1/8"	ASN-6	AS-6	1.57 (40)	.63 (16)
1/4"	ASN-8	AS-8	2.56 (65)	.83 (21)
3/8"	ASN-10	AS-10	3.35 (85)	.98 (25)
1/2"	ASN-15	AS-15	3.74 (95)	1.18 (30)



D

Viking Lite

Viking Xtreme

B

ADEX

N

Flow Rating (Cv)

Size	Port Size	Mounting Style	2-Position	3-Position
B3	1/8" Ports	Inline	.75	.60
	1/4" Tube	Inline	.45	.45
	1/8" Ports	Subbase	.65	.45
	1/4" Ports	Subbase	.65	.50
B5	1/4" Ports	Inline	1.4	1.1
	3/8" Ports	Inline	1.4	1.1
	1/4" Ports	Subbase	1.4	1.1
	3/8" Ports	Subbase	1.4	1.1
B6	3/8" Ports	Inline	2.7	2.1
B7	1/2" Ports	Inline	5.9	5.7
B8	3/4" Ports	Inline	7.0	6.6

ANSI / (NFPA) T3.21.3-1990 standard for Cv measurement.

Temperature Rating

5°F to 120°F (-15°C to 49°C) ambient.
 (Buna-N and Fluorocarbon)

Operating Pressure

Maximum: 145 PSIG (1000 kPa)

Minimum:

Operator / Function	Internal Pilot	Minimum PSIG (kPa)				
		B3	B5	B6	B7	B8
1. G. H	Single Solenoid - Air Return	20 (138)	20 (138)	20 (138)	35 (241)	35 (241)
2. A. J. S	Double Solenoid					
3. K. L	Single Remote Pilot - Air Return					
4. M	Double Remote Pilot	Vacuum				
5. 6. 7	Double Solenoid - APB, CE, PC	30 (207)	30 (207)	30 (207)	45 (310)	45 (310)
8. 9. 0	Double Remote Pilot - APB, CE, PC			Vacuum		
E. V. W	Single Solenoid - Air Return / Spring Assist	35 (241)	35 (241)	35 (241)	35 (241)	35 (241)
F. X. Y	Single Remote Pilot - Air Return / Spring Assist					
External Pilot*						
All	"B" Series	Vacuum				

* External Pilot Pressure / Remote Pilot Signal 35-145 PSIG (241-1000 kPa).

Note: For CSA-NRTL/C approved solenoid valves – insert an 'L' at the end of the valve part number.

- B3: Maximum pressure - 120 PSI
- B5: Maximum pressure - 145 PSI*§
- B6: Maximum pressure - 145 PSI*§
- B7: Maximum pressure - 145 PSI*†
- B8: Maximum pressure - 145 PSI*†

* Enclosure Option E is CSA / FM approved at source. For certification of valve / solenoid assembly, consult factory.

† Not Available with Enclosure 5

§ Not available with Enclosures 0. 5 & X

Solenoid Information (Solenoids are rated for continuous duty.)

Voltage				Enclosure "5"		Voltage				B5	B6	B7	B8	B5	B6	B7	B8
Code	AC		DC	Power Consumption	Holding (Amps)	Code	AC		DC	Enclosure "A"				Enclosure "B" to "R"			
	60Hz	50Hz					Power Consumption	Holding (Amps)		Power Consumption	Holding (Amps)	Power Consumption	Holding (Amps)	Power Consumption	Holding (Amps)		
42	24	22		1.6VA	.065	42	24	22		3.9VA	.136	7.3VA	.309				
45			12	1.2W	.098	45			12	2.6W	.208	4.6W	.365				
47*			12	0.91W	.074	47*			12	—	—	4.9W	.298				
48*			24	0.91W	.033	48*			24	—	—	4.8W	.142				
49			24	1.2W	.049	49			24	2.7W	.112	4.8W	.200				
53	120	110		1.6W	.013	53	120	110		4.1VA	.033	6.3VA	.047				
57	240	230		1.6W	.007	57	240	230		3.7VA	.017	6.4VA	.026				

Note: For enclosure "5" with "02" Option, solenoid wattage is 1.8W (2.4VA). Response time is 10% faster. Voltage rated +10 / -15%.

* 47 and 48 code are mobile voltages. voltage +25 / -30%.

Response Time

Valve Size	Port Size	Enclosure "5"				Enclosure "A, B, C, D, G, H, Q & R"			
		0 Cu. In. Test Chamber		25* Cu. In. Test Chamber		0 Cu. In. Test Chamber		25* Cu. In. Test Chamber	
		Fill	Exhaust	Fill	Exhaust	Fill	Exhaust	Fill	Exhaust
2-Position Single Solenoid / Internal Air Return									
B3	1/8"	.024	.026	.149	.242	—	—	—	—
B5	1/4"	.038	.040	.106	.156	.025	.026	.090	.142
B5*	3/8"	.039	.041	.150	.245	.025	.027	.141	.241
B6*	3/8"	.037	.038	.096	.132	.016	.018	.084	.119
B7	1/2"	.073	.075	.195	.275	.049	.051	.167	.249
B8	3/4"	.072	.074	.166	.226	.049	.051	.142	.206
2-Position Single Solenoid Spring / Air Return									
B3	1/8"	.019	.022	.128	.217	—	—	—	—
B5	1/4"	.039	.041	.108	.162	.024	.026	.091	.143
B5*	3/8"	.040	.042	.169	.261	.024	.026	.143	.240
B6*	3/8"	.035	.036	.096	.133	.023	.024	.083	.120
B7	1/2"	.071	.074	.194	.275	.049	.051	.167	.249
B8	3/4"	.072	.074	.176	.239	.046	.048	.142	.204
2-Position Double Solenoid									
B3	1/8"	.013	.015	.122	.213	—	—	—	—
B5	1/4"	.016	.018	.082	.132	.012	.014	.077	.128
B5*	3/8"	.016	.018	.129	.222	.016	.018	.128	.225
B6*	3/8"	.016	.017	.074	.110	.012	.013	.071	.107
B7	1/2"	.026	.028	.145	.228	.022	.024	.138	.225
B8	3/4"	.026	.028	.123	.185	.022	.024	.115	.178
3-Position Double Solenoid									
B3	1/8"	.021	.023	.091	.141	—	—	—	—
B5	1/4"	.022	.023	.091	.141	.011	.011	.079	.135
B5*	3/8"	.022	.024	.135	.229	.016	.019	.135	.234
B6*	3/8"	.024	.026	.094	.139	.016	.018	.084	.132
B7	1/2"	.049	.051	.167	.257	.028	.030	.148	.238
B8	3/4"	.035	.037	.136	.206	.028	.030	.130	.195


Average Fill Time (Seconds): With 100 PSIG supply, time required to fill from 0-90 PSIG and exhaust from 100 PSIG to 10 PSIG is measured from instant of energizing, or de-energizing 120V/60Hz solenoid. Times shown are average.

* For 3/8" ported, 50 cu. in. test chamber is used. For 1/2" & 3/4", a 200 cu. in. test chamber is used.



D	
	Viking Lite
	Viking Xtreme
	B
	ADEX
	N

A - Internal - Port #1 / Tapped M5

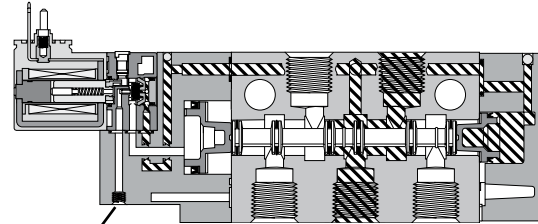


Tapped M5
Pilot Exhaust

B5 Shown

E - Dual Pressure - Port #3 / Vented

H - Dual Pressure - Port #5 / Vented (Similar)

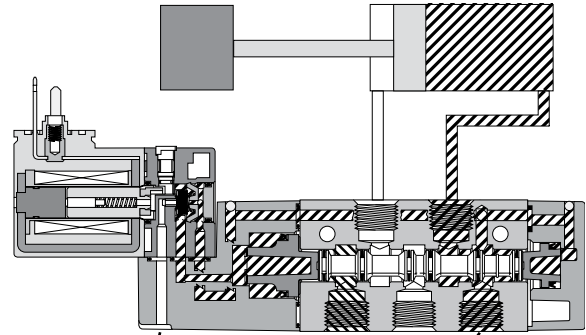


Vented
Pilot Exhaust

Port #3

B3 Shown

B - Internal - Port #1 / Vented

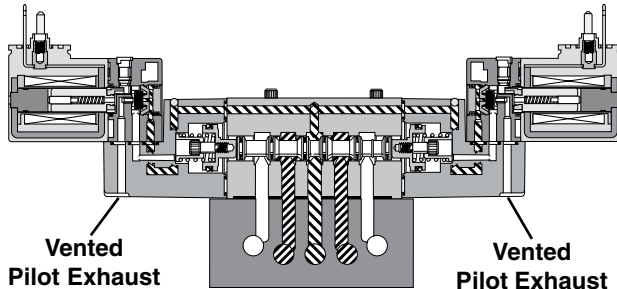


Vented
Pilot Exhaust

Vented
Pilot Exhaust

B3 Shown

K - External - Body / Tapped M5

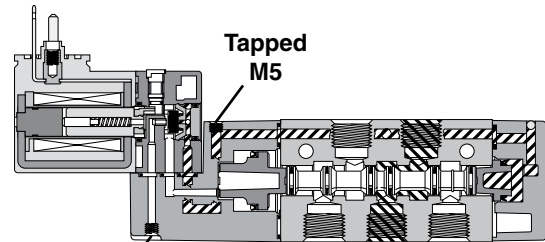


Tapped M5
Pilot Exhaust

B3 Shown

D - Dual Pressure - Port #3 / Tapped M5

G - Dual Pressure - Port #5 / Tapped M5 (Similar)

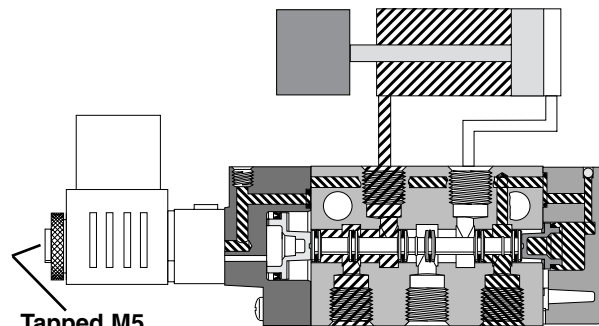

Tapped M5
Pilot Exhaust


Port #3

B5 Shown

Solenoid Kits – B3 'C', B5 'C', B6 'A', B7 'A', B8 'A'
 3-Pin, EN175301-803 (Former DIN 43650C), 15mm



STANDARD

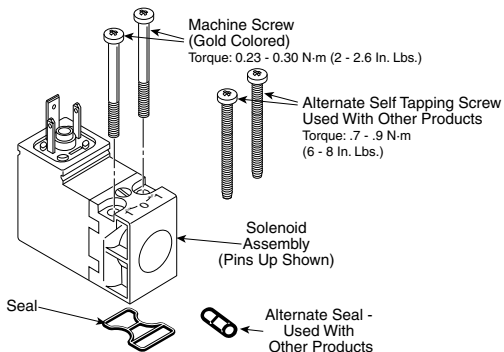

"02" OPTION

**PS2982*##P –
 Enclosure '5'**

Override	## Voltage						
	42	45	47*	48*	49	53	57
B	O	O	–	–	S	S	O
C	O	O	–	–	S	S	O
D	–	–	O	O	O	O	–
E	–	–	O	O	O	O	–

S - Standard; O - Option

* Mobile Voltage

Kit Includes: Solenoid, (2) Machine Screws, (2) Self Threading Screws, (1) Gasket, (1) 3-cell Gasket.

**PS3541 *##P –
 Enclosure '5 with "02" Option**

Override	## Voltage				
	42	45	49	53	57
B	O	O	S	S	O
C	O	O	S	S	O
D	–	–	O	O	–
E	–	–	O	O	–

Solenoid Kits Alternate Enclosures

P2F C A 4 49

Type	
Solenoid Kit	C

Enclosures / Lead Length	
30mm Square 3-Pin – ISO 4400 Form A (Male Only)	A
22mm Rectangular 3-Pin – Type B Industrial (Male Only)	B
Hazardous Duty, FM / CSA	F*
Grommet - 18" Leads	G
1/2" NPT Conduit - 18" Leads	H
Grommet 72" Leads	Q
1/2" Conduit 72" Leads	R

* Only Available with Voltage Codes "45", "49", "53" & "57".

Voltage / Frequency	
42	24VAC
45	12VDC
47*	12 VDC Mobile
48*	24 VDC Mobile
49	24VDC
53	120VAC
57	240VAC

* Only Available with Enclosures "A", "B" & "G".



Option A & E
 30mm Square
 3-Pin ISO 4400, DIN 43650A



Option B
 22mm Rectangular
 3-Pin DIN, Type B Industrial



Option G & Q
 Grommet, 18" or 72" Leads



Option F, H & R
 1/2" Conduit, 18" or 72" Leads




B3 Series

Spool / Body Service Kits

PS2901CP	4-Way, 2-Pos	<i>Kit Includes:</i>
PS2902CP	4-Way, 3-Pos APB	Item 15, 21 (2), 24, 25, 31 (2), grease packet
PS2903CP	4-Way, 3-Pos CE	Item 16, 21 (2), 31 (2), grease packet
PS2904CP	4-Way, 3-Pos PC	Item 16, 21 (2), 31 (2), grease packet
PS2971CP	3-Way, 2-Pos	Item 15, 21 (2), 24, 25, 31 (2), grease packet

Valve to Manifold Kits

PS2980P	Gasket (10) - Inline 3-Way Valve to Segmented Manifold
PS2981P	Gasket (10) - Inline 4-Way Valve to Segmented Manifold
PS2984P	O-ring (10) - Inline Valve to IEM Bar Manifold
PS2986P	Gasket - Subbase Valve to Subbase Bar Manifold; Item 4 (10), 39 (10)
PS2987P	Mounting Bolts (10) - Inline Valve / Subbase Valve



Manifold to Manifold Kit



PS2995P	O-ring (10), Sleeves (10), Tie Rods (10) - 3-Way Manifold
PS2996P	Gasket (10), Tie Rods (10) - 4-Way Manifold

Sandwich Regulator Cartridge Kit

PS299922P	2-60 PSI Cartridge (Item A, B)
PS299933P	5-125 PSI Cartridge (Item A, B)

Solenoid Kit *Kit Includes: 35, 36, 34*

PS2982*##P	3-Pin, EN175301-803, 15mm
PS3541*##P	3-Pin, EN175301-803, 15mm Option 2

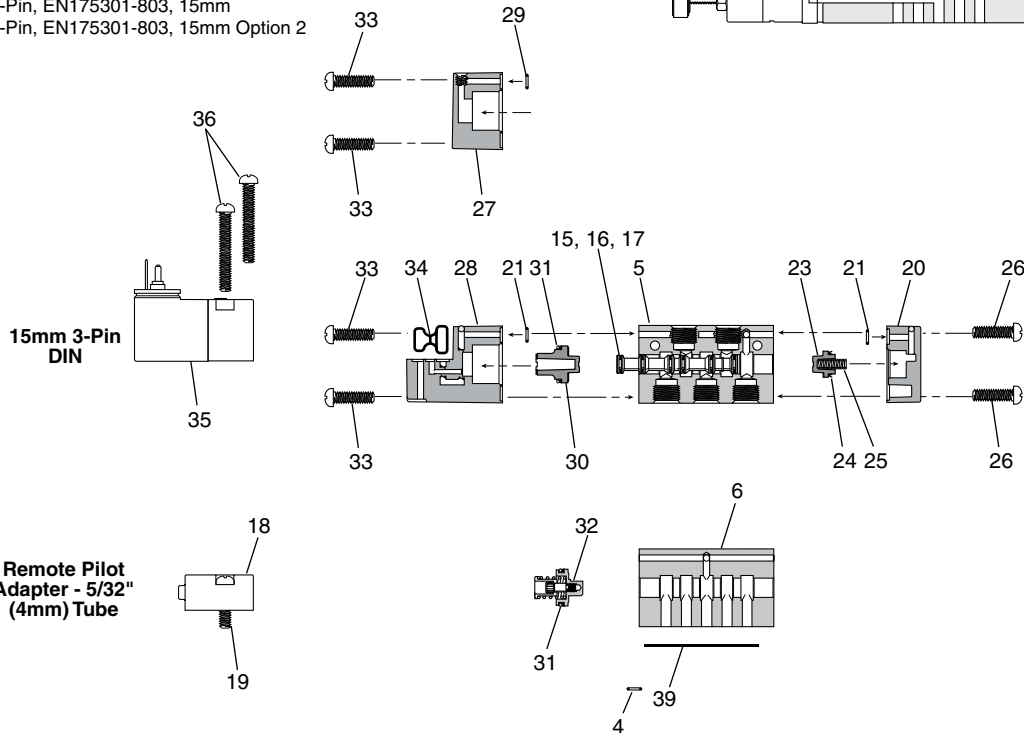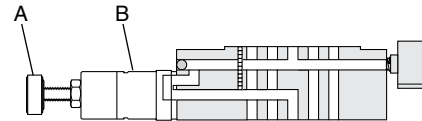

Item List – Parts not sold separately.

Item Description	Item Description	Item Description
4* O-ring - Ext Pilot Valve to Manifold	23 Return Piston	31* Lip Seal - Operator Piston
5 Inline Body - Tapped Ports	24* Lip Seal - Return Piston	32 Operator Piston Mechanism - 3-Position
6 Subbase Body	25* Spring, Return Assist	33 Screws - Operator Adapter
7 Inline Body - Tube Ports	26 Screws - Return Operator	34* Gasket - Solenoid to Adapter
15* Spool - 2-Position (Seals Assembled)	27 Remote Pilot Operator	35* 15mm Solenoid
16* Spool - 3-Position (Seals Assembled)	28a Solenoid Adapter - Vent Exhaust	36* Self Tapping Screw - Solenoid (Effective May 99)
17* Spool Seal	28b Solenoid Adapter - Ext Pilot. Vent Exhaust	36* Machine Screw - Solenoid (Jan 96 - May 99)
18 Remote Pilot Adapter (PVAP111)	28c Solenoid Adapter - Ext Pilot. Tapped Exhaust	39* Gasket - Subbase Valve to Base
19 Screw - Remote Pilot Adapter	28d Solenoid Adapter - Tapped Exhaust	40* Mounting Screws - Subbase Valve
20 Return Operator	29 O-ring - Remote Pilot	
21* Gasket - Body to Operator	30 Operator Piston - 2-Position	

Note: * Parts are available in kits shown. For kit components, order VALVE LESS SOLENOID for assembled and tested repair valve.

D
 Viking
 Viking Xtreme
 B
 ADEX
 N

B5 Series

Spool / Body Service Kits


- | | | |
|----------|------------------|---|
| PS2801*P | 4-Way, 2-Pos | <i>Kit Includes:</i> |
| PS2802*P | 4-Way, 3-Pos APB | Item 2, 10 (2), 14, 15, 116, 6 (2), grease packet |
| PS2803*P | 4-Way, 3-Pos CE | Item 3, 6 (2), 10 (2), 13 (2), grease packet |
| PS2804*P | 4-Way, 3-Pos PC | Item 3, 6 (2), 10 (2), 13 (2), grease packet |
| PS2871*P | 3-Way, 2-Pos NC | Item 2, 10 (2), 14, 15, 116, 6 (2), grease packet |

* Fluorocarbon Seal Kit (i.e. PS2801VP)

Pilot Replacement Kit – Alternate Enclosure

Kit Includes: Item 6, 9, 10, 11, 17 (2), 18 (2), 13, 19, 20, 22, 23, 24 (2), 57, 58 Assembled

- | | |
|-----------|-------------------|
| PS2897GBP | Non-Locking, BSPP |
| PS2897GCP | Locking, BSPP |
| PS2897NBP | Non-Locking, NPT |
| PS2897NCP | Locking, NPT |




Armature / Override Kit

Kit Includes: Item 22, 23, 24 (2), 57, 58 Assembled

P2FP13N4D*
Non-Locking

P2FP13N4C*
Locking

* Comes with a Thru Nut and A Diffuser Nut.



1/2" Conduit Connector

15mm 3-Pin DIN

Remote Pilot Adapter - 5/32" (4mm) Tube

Valve to Manifold Kits

- | | |
|---------|--|
| PS2884P | O-ring (10) - Inline Valve to IEM Manifold (All) |
| PS2886P | Gasket (10) - Subbase Valve to Subbase |
| PS2887P | Mounting Bolts (10) - Inline & Subbase Valve |



Manifold to Manifold Kit

- | | |
|---------|---|
| PS2896P | Gasket (10), Tie Rods (10) - 4-Way Manifold |
|---------|---|


Solenoid Kit

Kit Includes: 25, 122, 123

- | | |
|------------|------------------------------------|
| PS2982*##P | 3-Pin, EN175301-803, 15mm |
| PS3541*##P | 3-Pin, EN175301-803, 15mm Option 2 |

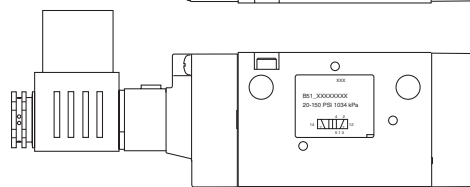

* Items 6A, 6B, 14 & 15, Used Only in 2-Position Kit.

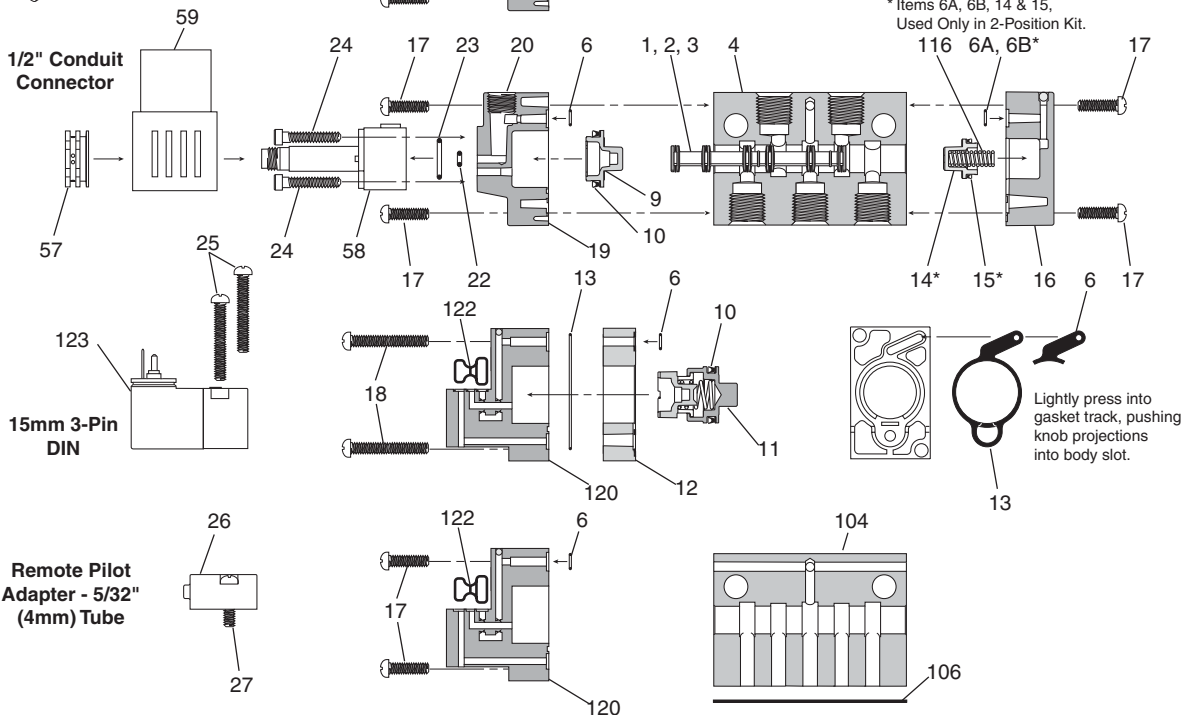

Item List – Parts not sold separately.

Item	Description	Item	Description	Item	Description
1*	Spool Seal	15*	Lip Seal - Return Piston	57*	Solenoid Nut
2*	Spool - 2-Position (Seals Assembled)	16	Return Operator	58a*	Solenoid Base Assembly - Locking
3*	Spool - 3-Position (Seals Assembled)	17*	Screws - Operator Adapter - 2-Position	58b*	Solenoid Base Assembly - Non Locking
4	Inline Body	18*	Screws - Operator Adapter - 3-Position	59*	Coil - Alternate Enclosure (see Page D87)
6A*	Gasket - Body to Operator	19*	Operator Adapter - Alt Enclosure	104	Subbase Body
6B	O-ring - Body to Operator (Effective July 2007)	20*	1/8" NPT Pipe Plug	106*	Gasket - Subbase Valve to Base
7	Remote Pilot Operator	22*	O-ring - Small - Solenoid Base	116*	Spring, Return Assist
9	Operator Piston - 2-Position	23*	O-ring - Large - Solenoid Base	120a	Solenoid Adapter - Vent Exhaust
10*	Lip Seal - Operator Piston	24*	Bolts - Solenoid Base	120b	Solenoid Adapter - Tapped Exhaust
11	Operator Piston Mechanism - 3-Position	25a*	Self Tapping Screw - Solenoid (Effective May 99)	120d	Solenoid Adapter - Ext Pilot. Vent Exhaust
12	Adapter - 3-Position	25b*	Machine Screw - Solenoid (Jan 96 - May 99)	120e	Solenoid Adapter - Ext Pilot. Tapped Exhaust
13*	Gasket - 3-Position Adapter to Body	26	Remote Pilot Adapter - 5/32" Tube (PVAP111)	122*	Gasket - Solenoid to Adapter
14	Return Piston	27	Screws - Remote Pilot Adapter	123*	15mm Solenoid

Note: * Parts are available in kits shown. For kit components, order VALVE LESS SOLENOID for assembled and tested repair valve.



B6 Series

Spool / Body Service Kits


PS2601P	4-Way, 2-Pos	Item 2, 6 (2), 9 (2), 11, 14, grease packet
PS2602P	4-Way, 3-Pos APB	Item 3, 6 (2), 9 (2), 13 (2), grease packet
PS2603P	4-Way, 3-Pos CE	Item 3, 6 (2), 9 (2), 13 (2), grease packet
PS2604P	4-Way, 3-Pos PC	Item 3, 6 (2), 9 (2), 13 (2), grease packet
PS267101P	3-Way, 2-Pos. NC	Item 2, 6, 9, 14, grease packet
PS267102P	3-Way, 2-Pos. NO	Item 2, 6, 9, 14, grease packet

Kit Includes:


Armature / Override Kit –

Kit Includes: Item 22, 23, 24 (2), 57, 58 Assembled

P2FP13N4D* Non-Locking



P2FP13N4C* Locking



* Comes with a Thru Nut and A Diffuser Nut.


Valve to Manifold Kits

PS2684P	O-ring (10) - Inline Valve to IEM Manifold
PS2887P	Mounting Bolts (10) - Inline Valve

Pilot Replacement Kit – Alternate Enclosure

Kit Includes: Item 6, 8, 9, 10, 16 (2), 17 (2), 18, 13, 20, 22, 23, 24 (2), 57, 58 Assembled



PS2897GBP	Non-Locking, BSPP
PS2897GCP	Locking, BSPP
PS2897NBP	Non-Locking, NPT
PS2897NCP	Locking, NPT



Solenoid Kit *Kit Includes: 25, 122, 123*

PS2982*##P 3-Pin, EN175301-803, 15mm

PS3541*##P 3-Pin, EN175301-803, 15mm Option 2

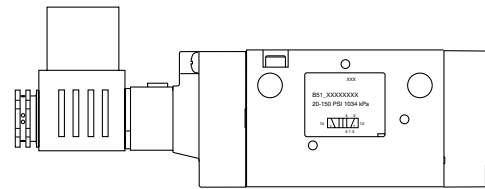

D


Viking
Lite

Viking
Xtreme

B

ADEX

N

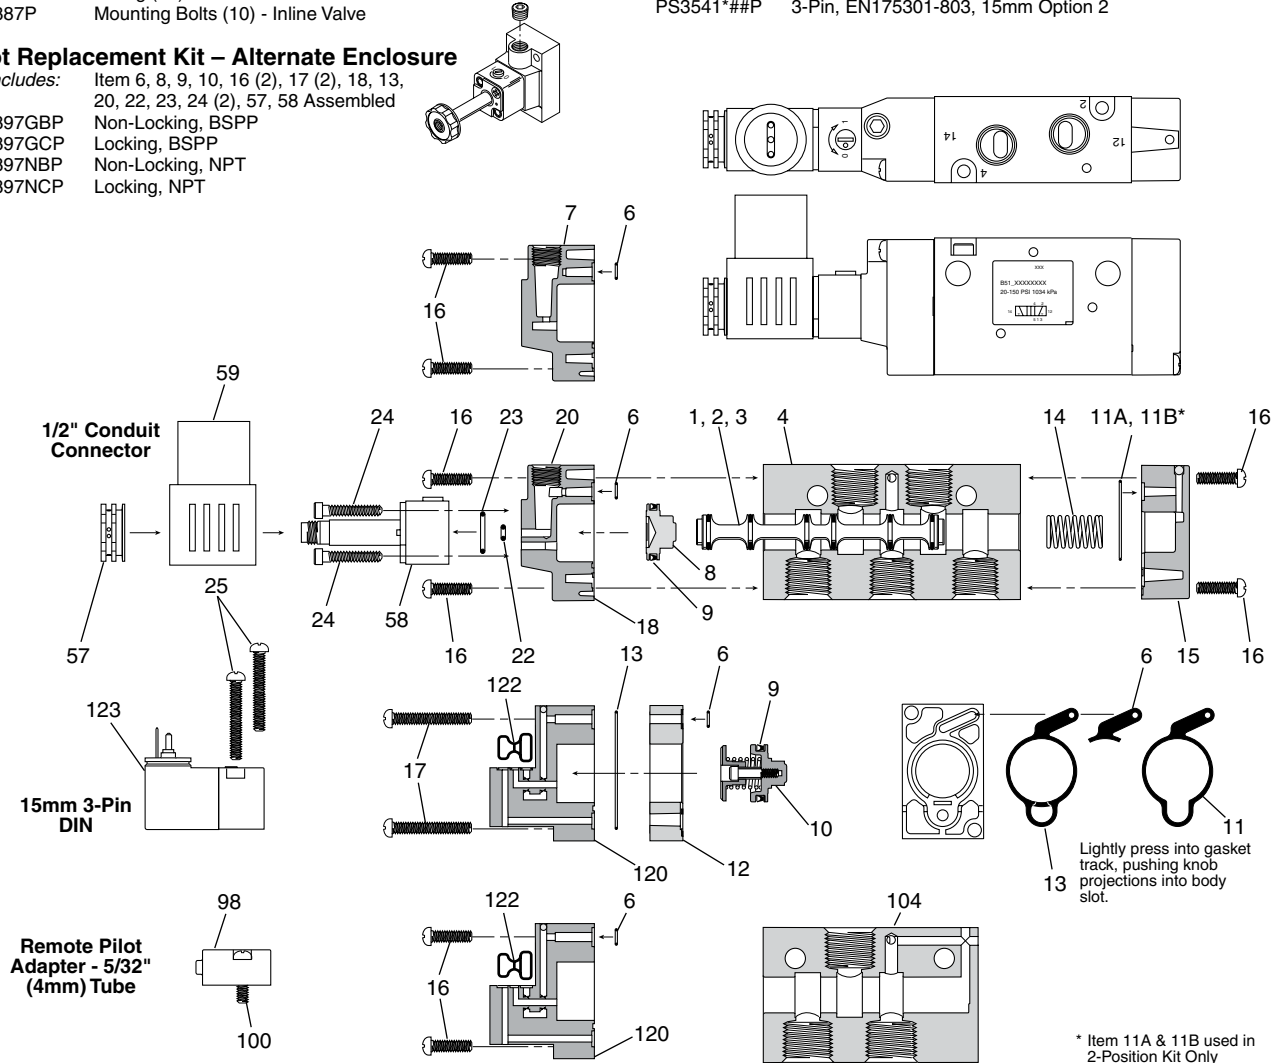

* Item 11A & 11B used in 2-Position Kit Only

Item List – Parts not sold separately.

Item	Description	Item	Description	Item	Description
1*	Spool Seal	14*	Spring, Return Assist	58a*	Solenoid Base Assembly - Locking
2*	Spool - 2-Position (Seals Assembled)	15a	Return Operator	58b*	Solenoid Base Assembly - Non Locking
3*	Spool - 3-Position (Seals Assembled)	15b	Return Operator - CSA Option	59*	Coil - Alternate Enclosure (see Page D87)
4	Inline Body - 4-Way	16*	Screws - Operator Adapter - 2-Position	98*	Remote Pilot Adapter - 5/32" Tube (PVAP111)
6*	Gasket - Body to Operator	17*	Screws - Operator Adapter - 3-Position	100	Screws - Remote Pilot Adapter
7	Remote Pilot Operator	18*	Operator Adapter - Alt Enclosure	104	Inline Body - 3-Way
8	Operator Piston - 2-Position	20*	1/8" NPT Pipe Plug	120a	Solenoid Adapter - Vent Exhaust
9*	Lip Seal - Operator Piston	22*	O-ring - Small - Solenoid Base	120b	Solenoid Adapter - Tapped Exhaust
10	Operator Piston Mechanism - 3-Position	23*	O-ring - Large - Solenoid Base	120c	Solenoid Adapter - Ext Pilot. Vent Exhaust
11A*	Gasket - Body to Return Cap	24*	Bolts - Solenoid Base	120d	Solenoid Adapter - Ext Pilot. Tapped Exhaust
11B*	O-ring - Body to Operator (Effective Feb. 2008)	25*	Self Tapping Screw - Solenoid (Effective Jan 00)	122*	Gasket - Solenoid to Adapter
12	Adapter - 3-Position	57*	Solenoid Nut	123*	15mm Solenoid
13	Gasket - 3-Position Adapter to Body				

Note: * Parts are available in kits shown. For kit components, order VALVE LESS SOLENOID for assembled and tested repair valve.



B7 & B8 Series

Spool / Body Service Kits


PS2501P	4-Way, 2-Pos	Item 2, 6 (2), 9 (2), 11, grease packet
PS2502P	4-Way, 3-Pos APB	Item 3, 6 (2), 9 (2), 13 (2), grease packet
PS2503P	4-Way, 3-Pos CE	Item 3, 6 (2), 9 (2), 13 (2), grease packet
PS2504P	4-Way, 3-Pos PC	Item 3, 6 (2), 9 (2), 13 (2), grease packet
PS257101P	3-Way, 2-Pos. NC	Item 2, 6, 9, grease packet
PS257102P	3-Way, 2-Pos. NO	Item 2, 6, 9, grease packet

Kit Includes:


Armature / Override Kit –

Kit Includes: Item 22, 23, 24 (2), 57, 58 Assembled

P2FP13N4D* Non-Locking



P2FP13N4C* Locking



* Comes with a Thru Nut and A Diffuser Nut.

Valve to Manifold Kits

PS2584P	O-ring (10) - Inline Valve to IEM Manifold
PS2587P	Mounting Bolts (10) - Inline Valve


Solenoid Kit *Kit Includes: 25, 122, 123*

PS2982*##P	3-Pin, EN175301-803, 15mm
PS3541*##P	3-Pin, EN175301-803, 15mm Option 2

Pilot Replacement Kit – Alternate Enclosure

Kit Includes: Item 6, 8, 9, 10, 16 (4), 18, 20, 22, 23, 24 (2), 57, 58 Assembled

PS2597GBP	Non-Locking, BSPP
PS2597GCP	Locking, BSPP
PS2597NBP	Non-Locking, NPT
PS2597NCP	Locking, NPT

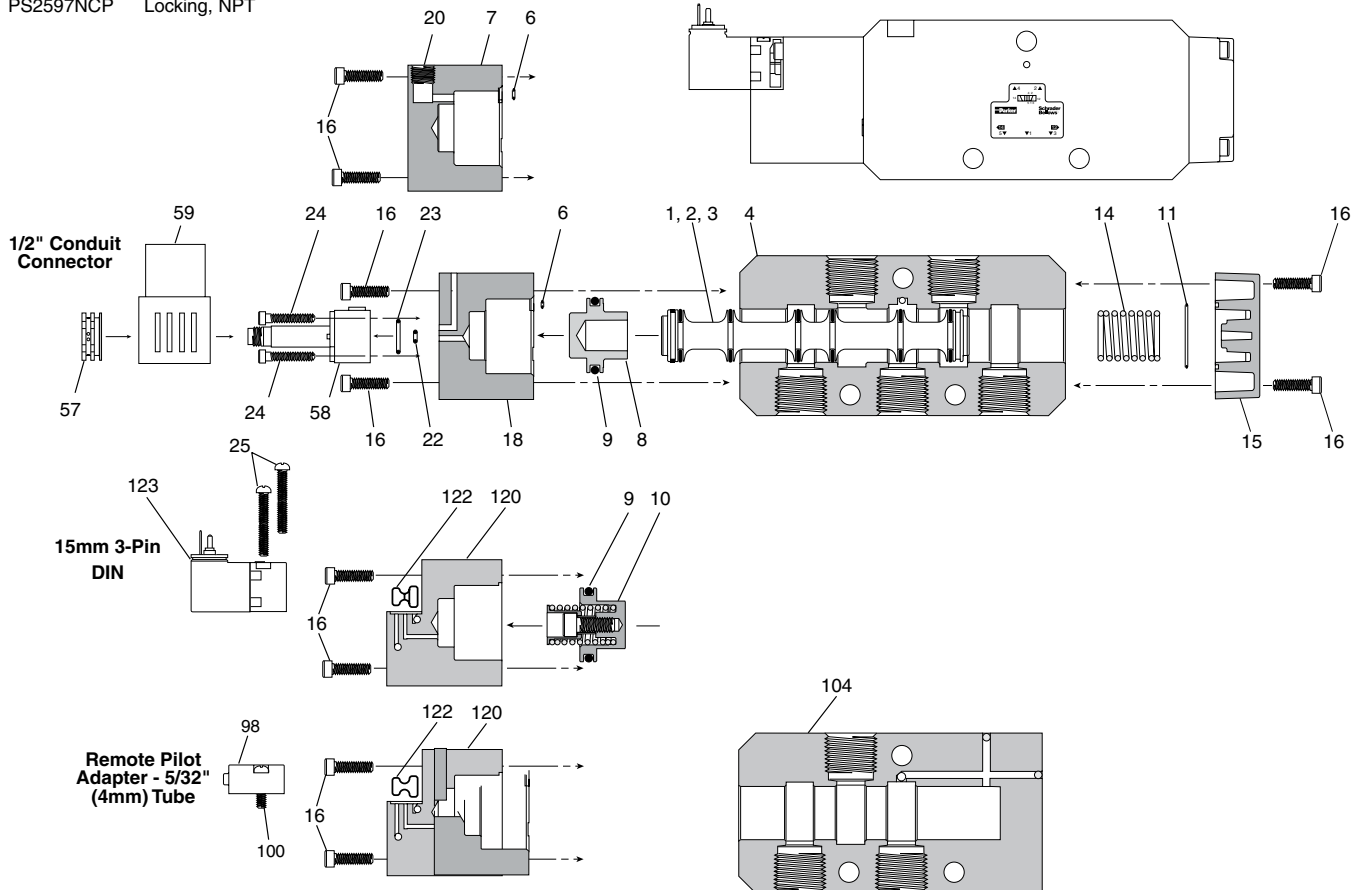


Item List – Parts not sold separately.

Item	Description	Item	Description	Item	Description
1*	Spool Seal	16*	Screws - Operator Adapter	98*	Remote Pilot Adapter - 5/32" Tube (PVAP111)
2*	Spool - 2-Position (Seals Assembled)	8*	Operator Adapter - Alt Enclosure	100	Screws - Remote Pilot Adapter
3*	Spool - 3-Position (Seals Assembled)	20*	1/8" NPT Pipe Plug	104	Inline Body - 3-Way
4	Inline Body - 4-Way	22*	O-ring - Small - Solenoid Base	120a	Solenoid Adapter - Vent Exhaust
6*	Gasket - Body to Operator	23*	O-ring - Large - Solenoid Base	120b	Solenoid Adapter - Tapped Exhaust
7	Remote Pilot Operator	24*	Bolts - Solenoid Base	120c	Solenoid Adapter - Ext Pilot. Vent Exhaust
8	Operator Piston - 2-Position	25*	Self Tapping Screw - Solenoid (Effective Jan 00)	120d	Solenoid Adapter - Ext Pilot. Tapped Exhaust
9*	Lip Seal - Operator Piston	57*	Solenoid Nut	122*	Gasket - Solenoid to Adapter
10	Operator Piston Mechanism - 3-Position	58a*	Solenoid Base Assembly - Locking	123*	15mm Solenoid
11*	Gasket - Body to Return Cap	58b*	Solenoid Base Assembly - Non Locking		
14*	Spring, Return Assist	59*	Coil - Alternate Enclosure (see Page D87)		
15a	Return Operator				

Note: * Parts are available in kits shown. For kit components, order VALVE LESS SOLENOID for assembled and tested repair valve.



B3 Single & Double Operators – 4-Way Inline

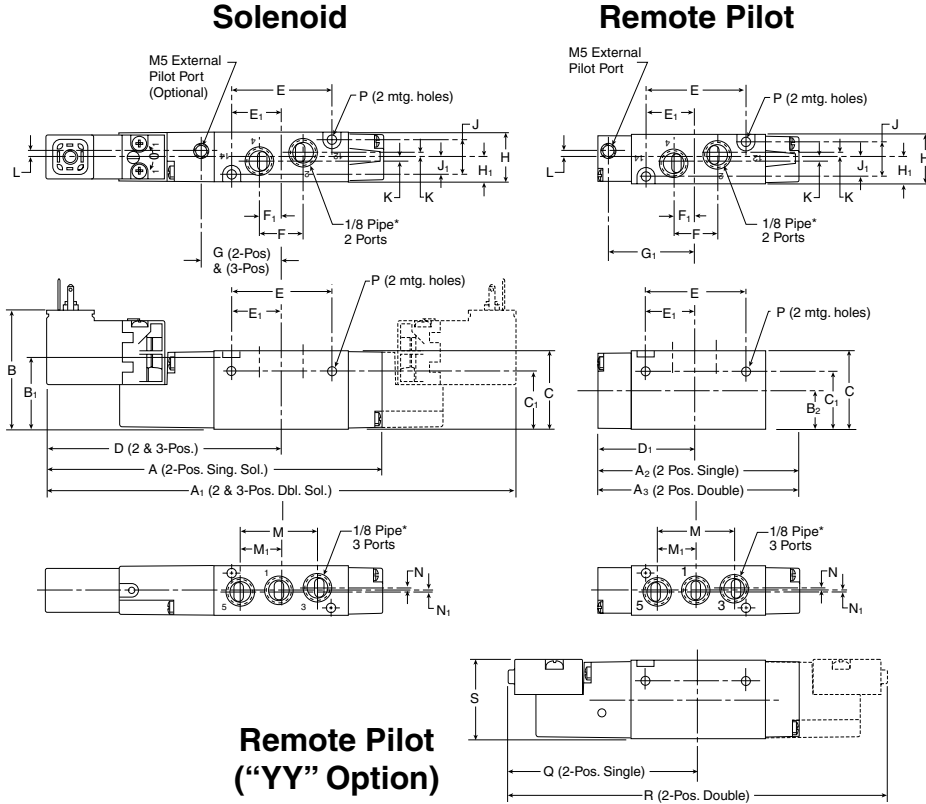

B3 4-Way Inline

A 4.67 (119)	A₁ 6.44 (164)	A₂ 3.12 (79)	A₃ 3.33 (85)	B 1.66 (42)
B₁ 1.05 (27)	B₂ .57 (14)	C 1.13 (39)	C₁ .84 (21)	D 3.22 (82)
D₁ 1.66 (42)	E 1.47 (37)	E₁ .732 (19)	F .63 (16)	F₁ .32 (8)
G 1.13 (29)	G₁ 1.50 (38)	H .71 (18)	H₁ .36 (9)	J .51 (13)
J₁ .26 (7)	K .06 (2)	L .11 (3)	M 1.12 (28)	M₁ .56 (14)
N .05 (1)	N₁ .05 (1)	P ∅ .13 ∅ (3.3)	Q 2.69 (68)	R 5.37 (136)
S 1.16 (29)				


Inches (mm)

D

Viking Lite

Viking Xtreme

B3 Single & Double Operators – 3-Way Inline

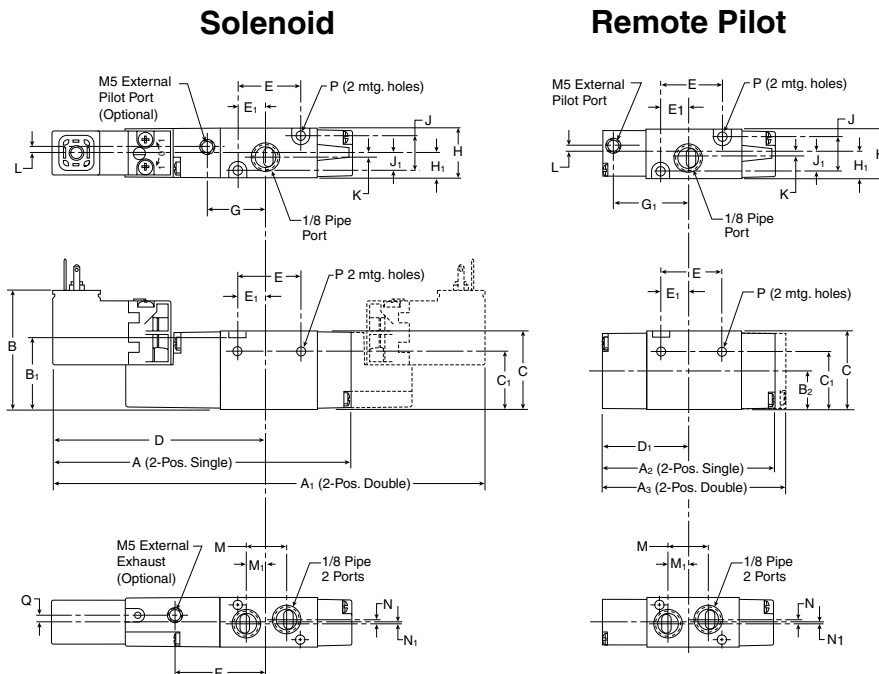

B3 3-Way Inline

A 4.20 (107)	A₁ 5.96 (151)	A₂ 2.65 (67)	A₃ 2.86 (73)	B 1.66 (42)
B₁ 1.05 (27)	B₂ .57 (14)	C 1.13 (29)	C₁ .84 (21)	D 2.93 (74)
D₁ 1.38 (35)	E .98 (25)	E₁ .44 (11)	F 1.32 (34)	G .85 (22)
G₁ 1.22 (31)	H .71 (18)	H₁ .36 (9)	J .51 (13)	J₁ .26 (7)
K .06 (2)	L .11 (3)	M .63 (16)	M₁ .27 (7)	N .12 (3)
N₁ .06 (2)	P ∅ .13 ∅ (3.3)	Q .08 (2)		

Inches (mm)


B3

Single & Double Operators – 4-Way Face Mount

Solenoid

Remote Pilot

B3 4-Way Face Mount

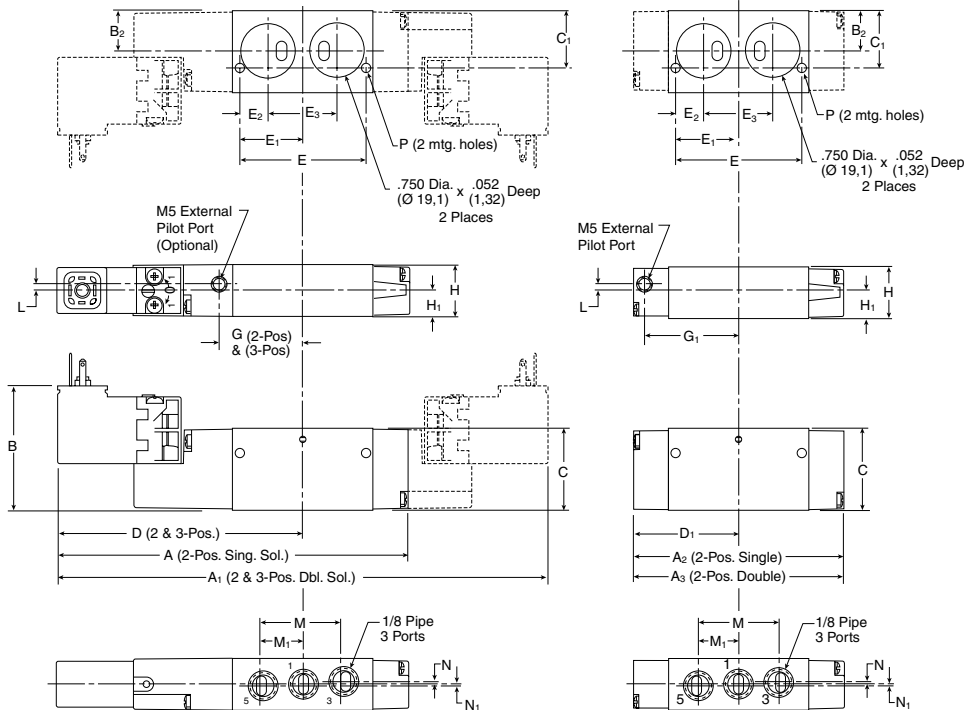

A 4.67 (119)	A₁ 6.44 (164)	A₂ 3.12 (79)	A₃ 3.33 (85)	B 1.66 (42)
B₂ .58 (15)	C 1.13 (29)	C₁ .81 (21)	D 3.22 (82)	D₁ 1.66 (42)
E 1.74 (44)	E₁ .87 (22)	E₂ .39 (10)	E₃ .95 (24)	G 1.13 (29)
G₁ 1.50 (38)	H .71 (18)	H₁ .36 (9)	L .11 (3)	M 1.12 (28)
M₁ .56 (14)	N .05 (1)	N₁ .05 (1)	P Ø .13 Ø (3.3)	

Inches (mm)

D

Viking
Lite



Viking
Xtreme

B

ADEX

N

B3 Single & Double Operators – 4-Way IEM Stackable

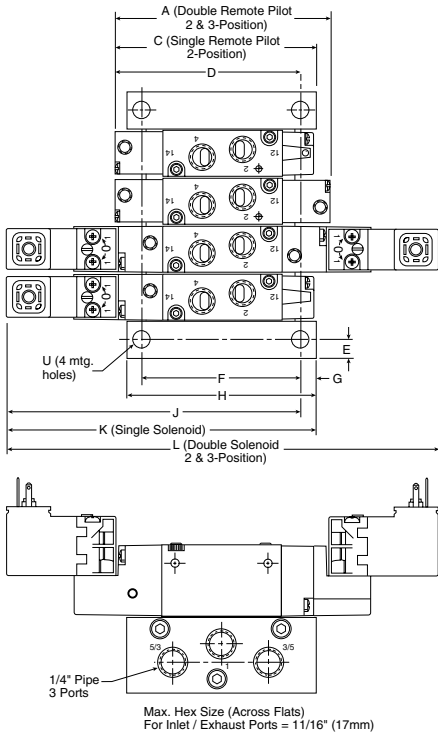

B3 4-Way IEM Stackable

A 3.33 (84.6)	C 3.12 (79.2)	D 2.91 (73.9)	E .30 (7.6)	F 2.49 (63.3)
G .25 (6.4)	H 3.00 (76.2)	J 4.46 (113.3)	K 4.67 (118.6)	L 6.43 (163.3)
N 2.91 (73.9)	P 1.25 (31.8)	Q 2.38 (60.5)	R .74 ± .01 (18.8) ± .3	
S 1.34 (34.0)	T 1.94 (49.3)	U Ø .28 Ø (7.1)		

Inches (mm)

D

Viking
Lite



Viking
Xtreme

B

ADEX

N

B3 Single & Double Operators – 4-Way IEM Aluminum Bar


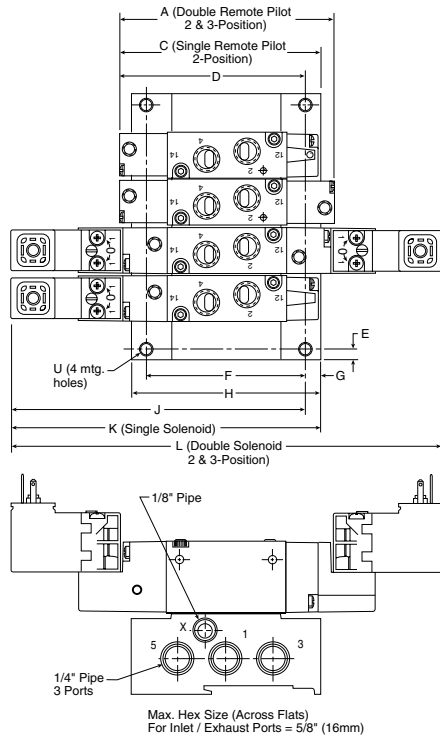


B3 4-Way IEM Aluminum Bar Manifold

A 3.33 (84.6)	C 3.17 (80.5)	D 2.94 (74.7)	E .25 (6.4)	F 2.54 (64.5)
G .23 (5.9)	H 3.00 (76.2)	J 4.50 (114.2)	K 4.73 (120.1)	L 6.43 (163.3)
N 2.94 (74.7)	P 1.28 (32.5)	Q 2.41 (61.2)	R .81 (20.5)	S 1.13 (28.8)
T 1.64 (41.6)	U Ø .23 Ø (5.8)			

Inches (mm)

B3 Single & Double Operators – 3-Way IEM Aluminum Bar

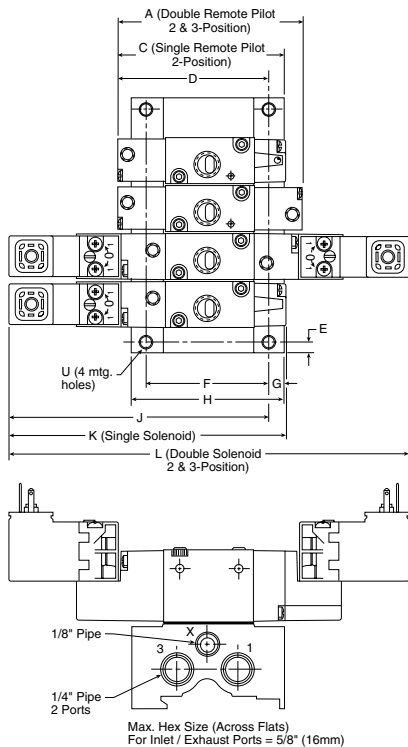


B3 4-Way IEM Aluminum Bar Manifold

A 2.86 (72.6)	C 2.65 (67.3)	D 2.33 (59.2)	E .25 (6.4)	F 1.80 (45.7)
G .23 (5.9)	H 2.25 (57.2)	J 3.88 (98.6)	K 4.20 (106.7)	L 5.96 (151.4)
N 2.93 (74.5)	P 1.27 (32.4)	Q 2.40 (61.1)	R .81 (20.5)	S 1.13 (28.8)
T 1.64 (41.6)	U Ø .23 Ø (5.8)			

Inches (mm)

B3 Single & Double Operators – 4-Way Single Subbase

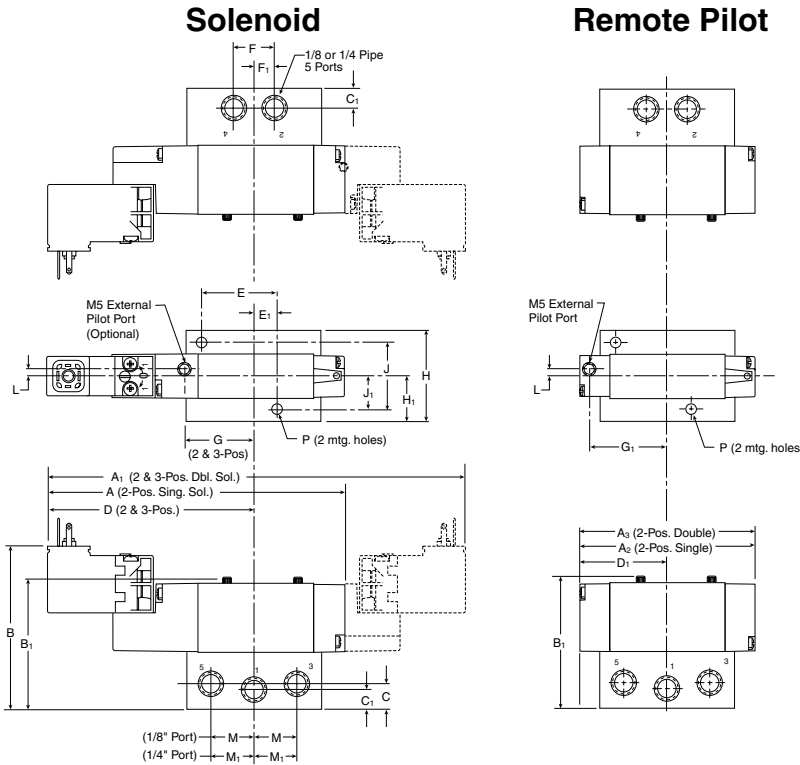


B3 4-Way Single Subbase

A 4.67 (119)	A₁ 6.44 (164)	A₂ 3.12 (79)	A₃ 3.33 (85)	B 2.63 (67)
B₁ 2.21 (56)	C .47 (12)	C₁ .37 (9)	D 3.22 (82)	D₁ 1.66 (42)
E 1.25 (32)	E₁ .38 (10)	F .69 (18)	F₁ .34 (9)	G 1.13 (29)
G₁ 1.50 (38)	H 1.50 (38)	H₁ .75 (19)	J 1.12 (28)	J₁ .56 (14)
M .71 (18)	M₁ .76 (19)	P Ø .18 Ø (4)		

Inches (mm)

B3 Single & Double Operators – 5-Port Subbase Bar Manifold

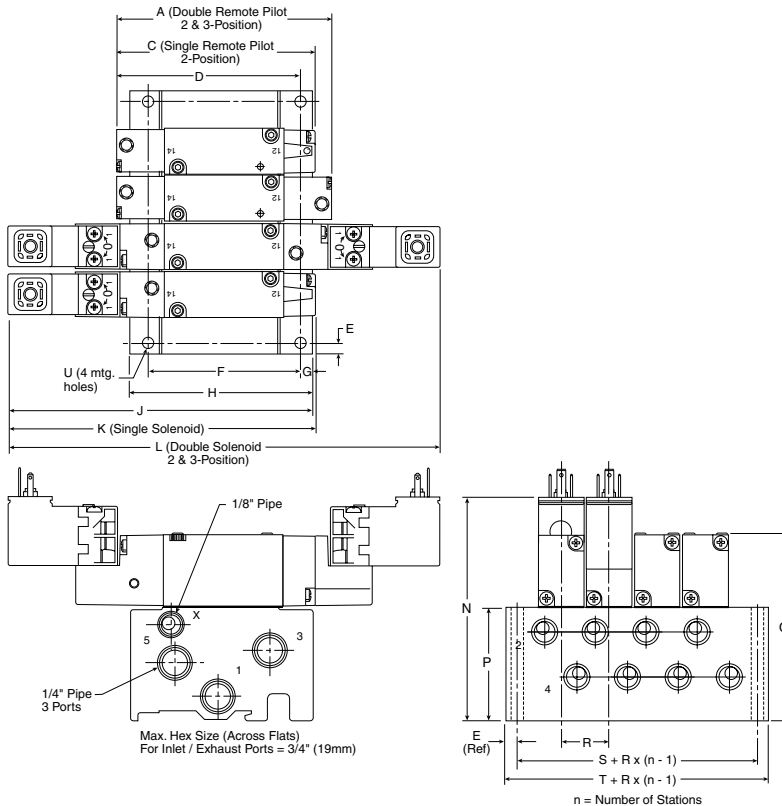

B3 5-Port Subbase Bar Manifold

A 3.33 (84.6)	C 3.12 (79.2)	D 2.88 (73.2)	E .25 (6.3)	F 2.43 (61.7)
G .22 (5.5)	H 2.93 (74.5)	J 4.66 (118.3)	K 4.67 (118.6)	L 6.43 (166.3)
N 3.47 (88.2)	P 1.81 (46.0)	Q 2.94 (74.7)	R .81 (20.5)	S 1.39 (35.4)
T 1.89 (48.0)	U Ø .22 Ø (5.6)			

Inches (mm)

D

Viking
Lite

Viking
Xtreme

B

ADEX



N

B5 Single & Double Operators – 4-Way Inline


Solenoid

Remote Pilot

B5 4-Way Inline

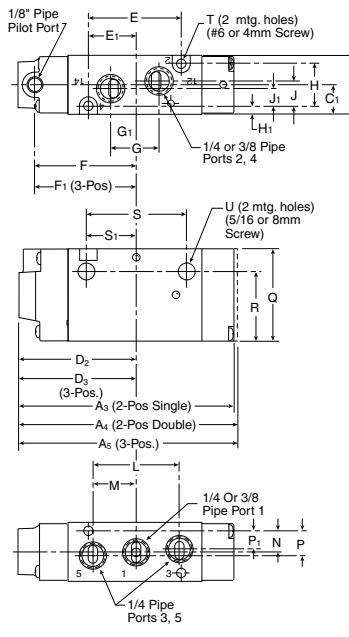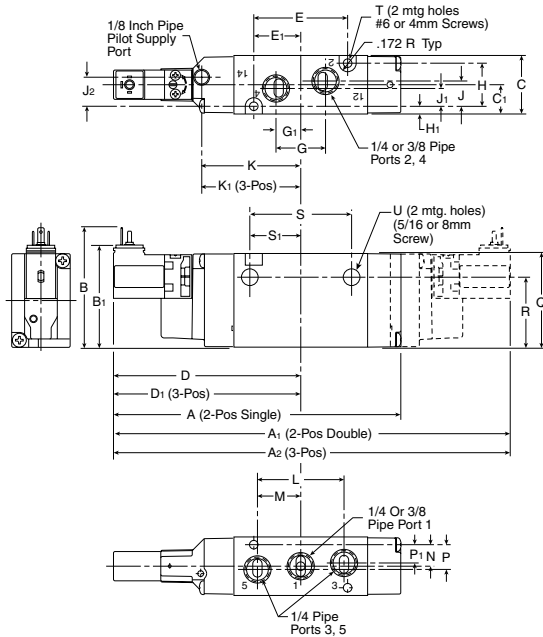

Remote Pilot ("YY" Option)

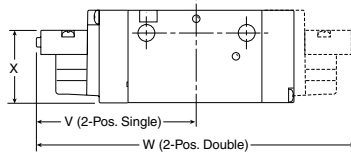

A 5.78 (147)	A₁ 7.51 (191)	A₂ 8.45 (215)	A₃ 4.37 (110)	A₄ 4.70 (119)
A₅ 5.64 (143)	B 2.41 (61)	B₁ 2.06 (52)	C 1.18 (30)	C₁ .59 (15)
D 3.76 (96)	D₁ 4.23 (107)	D₂ 2.35 (60)	D₃ 2.82 (72)	E 1.89 (48)
E₁ .95 (24)	F 2.01 (51)	F₁ 2.47 (63)	G 1.00 (25)	G₁ .50 (13)
H .87 (22)	H₁ .16 (4)	J .51 (13)	J₁ .36 (9)	J₂ .58 (15)
K 2.00 (51)	K₁ 2.47 (63)	L 1.75 (44)	M .88 (22)	N .43 (48)
P .50 (13)	P₁ .37 (92)	Q 1.89 (48)	R 1.41 (36)	S 2.05 (52)
S₁ 1.03 (26)	T Ø .177 Ø (4.5)	U Ø .34 Ø (9)	V 3.24 (82)	W 6.48 (165)
X 1.50 (383)				



Inches (mm)

B5 Single & Double Operators – 3-Way Inline

Solenoid

Remote Pilot

B5 3-Way Inline

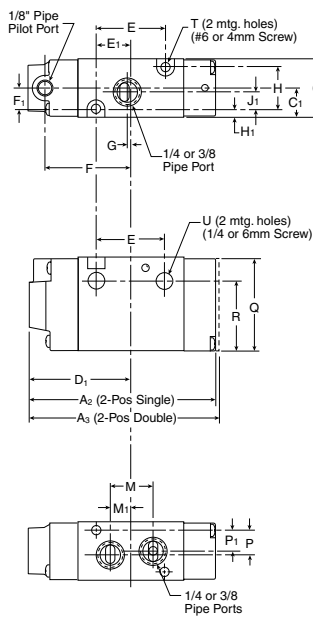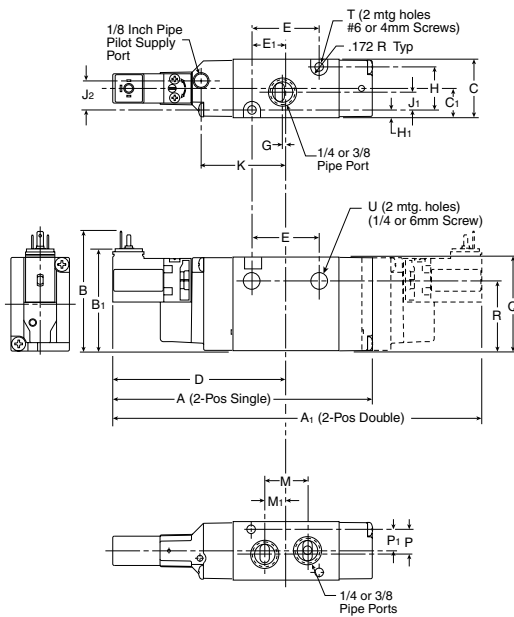

A 5.29 (134)	A₁ 7.03 (179)	A₂ 3.88 (99)	A₃ 4.21 (107)	B 2.41 (61)
B₁ 2.06 (52)	C 1.18 (30)	C₁ .59 (15)	D 3.43 (87)	D₁ 2.11 (54)
E 1.40 (36)	E₁ .70 (18)	F 1.77 (45)	F₁ .43 (11)	G .06 (2)
H .87 (22)	H₁ .16 (4)	J₁ .36 (9)	J₂ .58 (15)	K 1.67 (42)
M .88 (22)	M₁ .44 (11)	P .50 (13)	P₁ .37 (9)	Q 1.89 (48)
R 1.41 (36)	T Ø .177 Ø (4.5)	U Ø .26 Ø (6.6)		

Inches (mm)

D
 Viking Lite
 Viking Xtreme
 B
 ADEX
 N


B5

Single & Double Operators – 4-Way NAMUR Mount

Solenoid

Remote Pilot

B5 4-Way NAMUR Mount

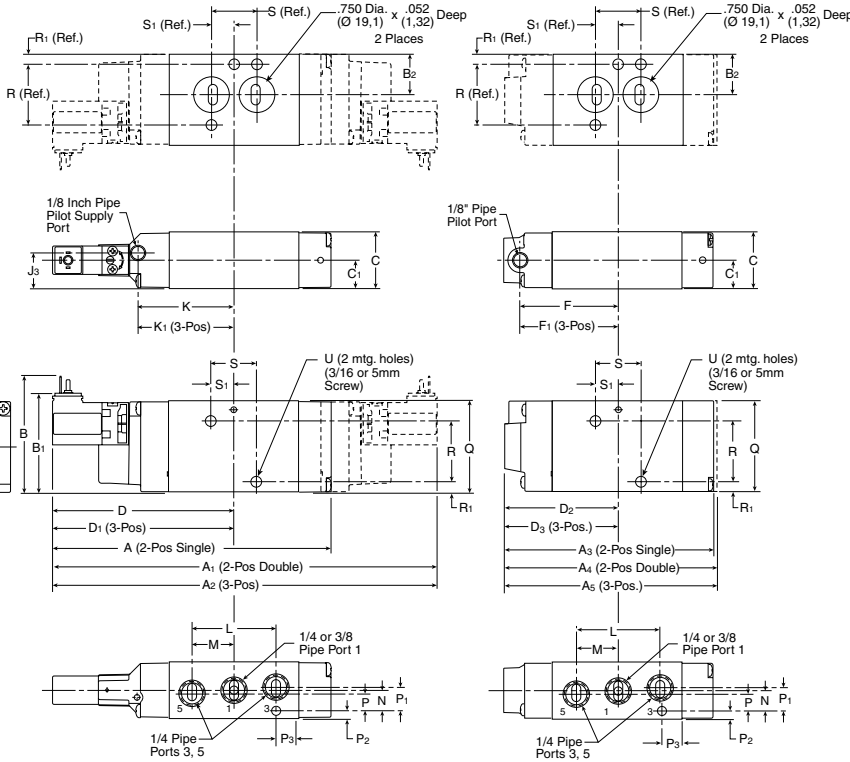


A 5.78 (147)	A₁ 7.51 (191)	A₂ 8.45 (215)	A₃ 4.37 (110)	A₄ 4.70 (119)
A₅ 5.64 (143)	B 2.41 (61)	B₁ 2.06 (52)	B₂ .84 (21)	C 1.18 (30)
C₁ .59 (15)	D 3.76 (96)	D₁ 4.23 (107)	D₂ 2.35 (60)	D₃ 2.82 (72)
F 2.01 (51)	F₁ 2.47 (63)	J₃ .74 (19)	K 2.00 (51)	K₁ 2.47 (63)
L 1.75 (44)	M .88 (22)	N .44 (11)	P .37 (9.4)	P₁ .50 (13)
P₂ .16 (4)	P₃ .40 (10)	Q 1.89 (48)	R 1.26 (32)	R₁ .21 (5)
S .94 (24)	S₁ .47 (12)	U Ø .224 Ø (5.7)		

Inches (mm)

B5

Alternative Electrical Enclosure Option F

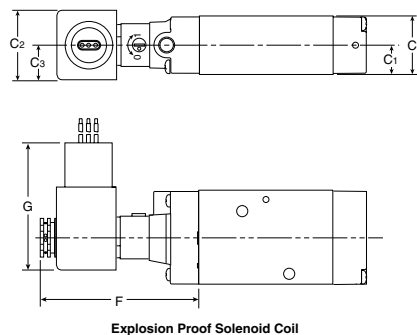

B5 4-Way NAMUR Mount with Option F Enclosure

C 1.18 (30)	C₁ .59 (15)	C₂ 1.42 (36)	C₃ .71 (18)	F 3.15 (80)
G 2.60 (66)				

Inches (mm)

D

Viking
Lite



Viking
Xtreme

B

ADEX

N

B5 Single & Double Operators – 4-Way IEM Stackable

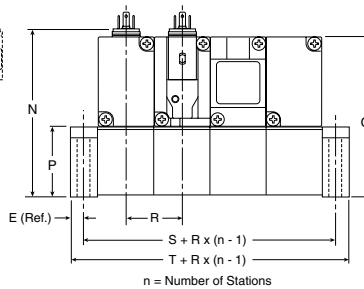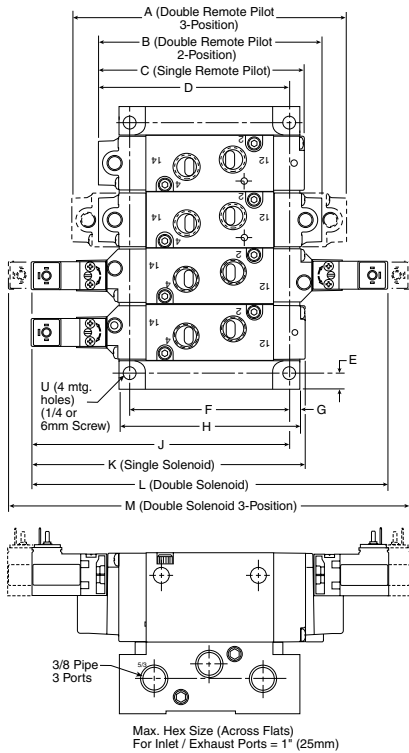


B5 4-Way IEM Stackable

A 5.64 (143.3)	B 4.70 (119.4)	C 4.37 (110.0)	D 4.29 (109.0)	E .29 (7.4)
F 3.44 (87.4)	G .24 (6.1)	H 3.92 (99.6)	J 5.48 (139.2)	K 5.78 (146.8)
L 7.52 (191.0)	M 8.46 (214.9)	N 3.56 (90.4)	P 1.50 (38.1)	Q 3.42 (86.9)
R 1.21 ± .01 (30.7) ± (.3)	S 1.79 (45.5)	T 2.37 (60.2)	U Ø .28 Ø (7.1)	


Inches (mm)

B5 Single & Double Operators – 4-Way Single Subbase

Solenoid

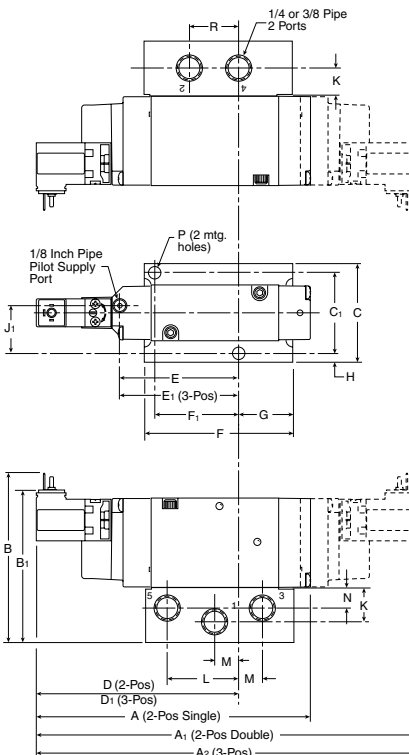

Remote Pilot

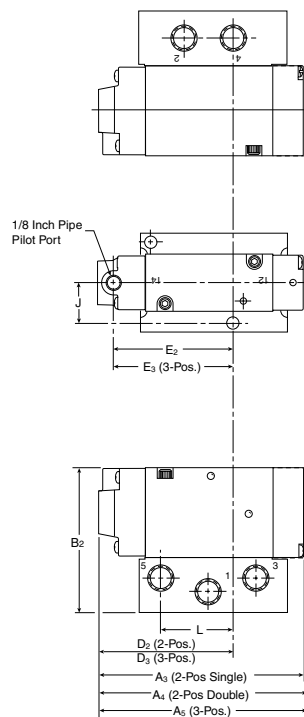



B5 4-Way Subbase

A 5.78 (147)	A₁ 7.52 (191)	A₂ 8.46 (215)	A₃ 4.37 (110)	A₄ 4.70 (119)
A₅ 5.64 (143)	B 3.56 (90)	B₁ 3.21 (82)	B₂ 3.03 (77)	C 2.12 (54)
C₁ 1.69 (43)	D 4.26 (108)	D₁ 4.73 (120)	D₂ 2.85 (72)	D₃ 3.32 (40)
E 2.51 (65)	E₁ 2.98 (76)	E₂ 2.60 (66)	E₃ 3.07 (80)	F 2.90 (74)
F₁ 1.69 (43)	G .95 (24)	H .22 (5)	J .84 (21)	J₁ .99 (25)
K .71 (18)	L 1.50 (38)	M .50 (13)	N .46 (12)	P Ø .27 Ø (7)
R 1.00 (25)				


Inches (mm)

D
 Viking Lite
 Viking Xtreme
 B
 ADEX
 N

B5 Single & Double Operators – 4-Way IEM Aluminum Bar

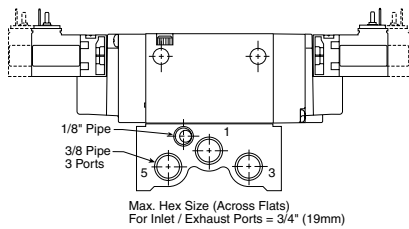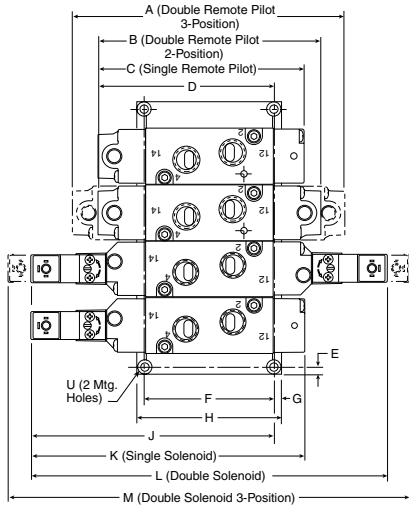

Max. Hex Size (Across Flats)
 For Inlet / Exhaust Ports = 3/4" (19mm)

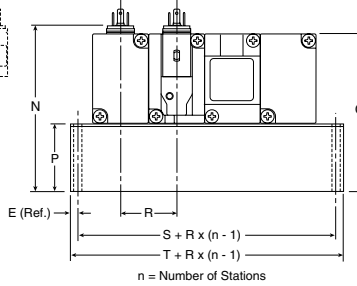



n = Number of Stations

B5 4-Way IEM Aluminum Bar Manifold


A 5.64 (143.3)	B 4.70 (119.4)	C 4.37 (110.0)	D 3.74 (95.0)	E .18 (4.6)
F 2.78 (70.6)	G .17 (4.3)	H 3.12 (79.2)	J 5.15 (130.8)	K 5.78 (146.8)
L 7.52 (191.0)	M 8.46 (214.9)	N 3.50 (89.0)	P 1.44 (36.6)	Q 3.36 (85.3)
R 1.26 (32.0)	S 1.78 (45.2)	T 2.14 (54.4)	U Ø .22 Ø (5.5)	

Inches (mm)

B5 Single & Double Operators – 3-Way IEM Aluminum Bar

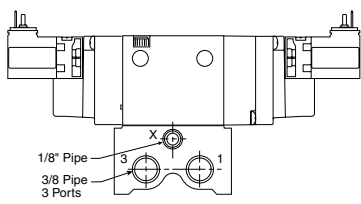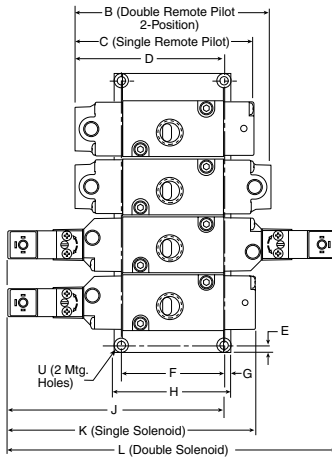

Max. Hex Size (Across Flats)
 For Inlet / Exhaust Ports = 13/16" (20mm)

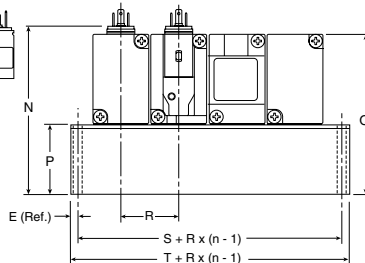

n = Number of Stations

B5 3-Way IEM Aluminum Bar Manifold

B 4.21 (106.9)	C 3.88 (98.6)	D 3.41 (86.6)	E .18 (4.6)	F 2.12 (53.8)
G .17 (4.3)	H 2.46 (62.5)	J 4.82 (122.4)	K 5.29 (134.4)	L 7.03 (178.6)
N 3.50 (89.0)	P 1.44 (36.6)	Q 3.36 (85.3)	R 1.26 (32.0)	S 1.76 (44.7)
T 2.12 (53.8)	U Ø .18 Ø (4.6)			

Inches (mm)

D

Viking Lite

Viking Xtreme


B

ADEX


N

B5

4-Way Alternative Electrical Enclosures

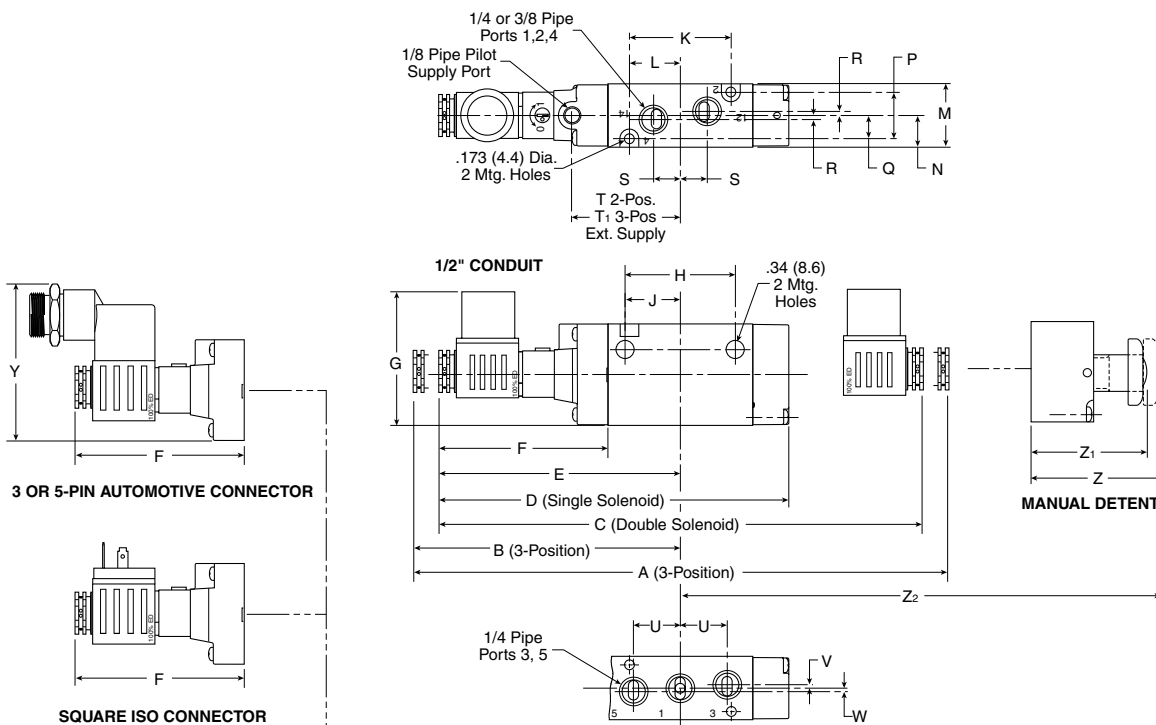

3-Way Alternative Electrical Enclosures

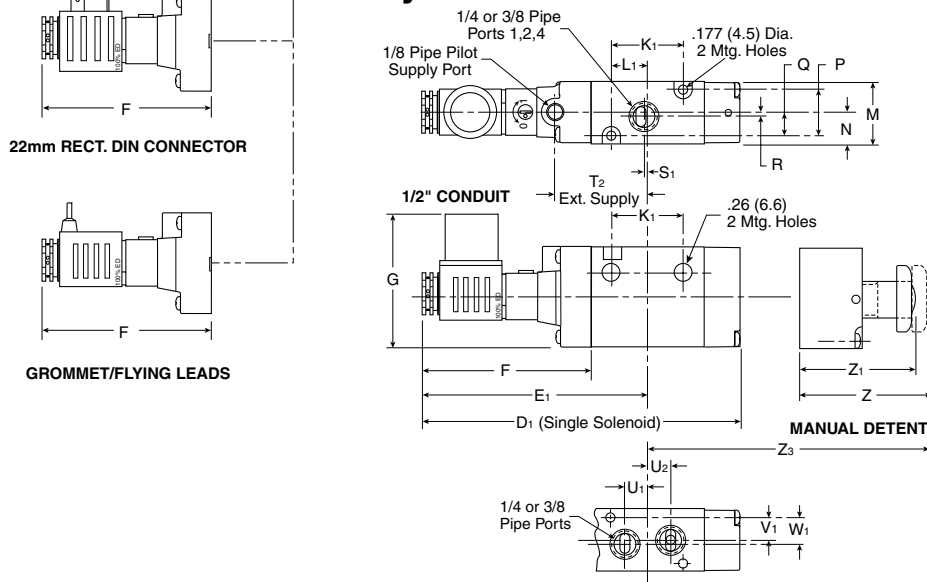

B5 Alternative – Electrical Enclosures Inches (mm)

A 9.94 (252.5)	A₁ .872 (221.4)	B 4.97 (126.2)	C 9.00 (228.6)	D 6.52 (165.6)	D₁ 6.02 (152.9)	E 4.50 (114.3)	E₁ 4.26 (108.1)	F 3.15 (80.0)	G 2.47 (62.8)	H 2.05 (52.1)	J 1.03 (26.2)	K 1.89 (48.0)
K₁ 1.40 (35.5)	L .95 (24.1)	L₁ .70 (17.8)	M 1.18 (30.0)	N .59 (15.0)	P .87 (22.1)	Q .43 (10.9)	R .08 (2.0)	S .50 (12.7)	S₁ .06 (1.5)	T 2.01 (51.1)	T₁ 2.47 (62.7)	T₂ 1.76 (44.8)
U .87 (22.1)	U₁ .43 (10.9)	U₂ .45 (11.3)	V .06 (1.5)	V₁ .37 (9.3)	W .07 (1.8)	W₁ .50 (13)	Y 2.90 (73.6)	Z 2.40 (60.9)	Z₁ 2.12 (53.8)	Z₂ 3.75 (95.2)	Z₃ 4.17 (105.8)	

D

Viking
Lite

Viking
Xtreme

B


ADEX

N

B6 Single & Double Operators – 4-Way Inline

Solenoid

Remote Pilot

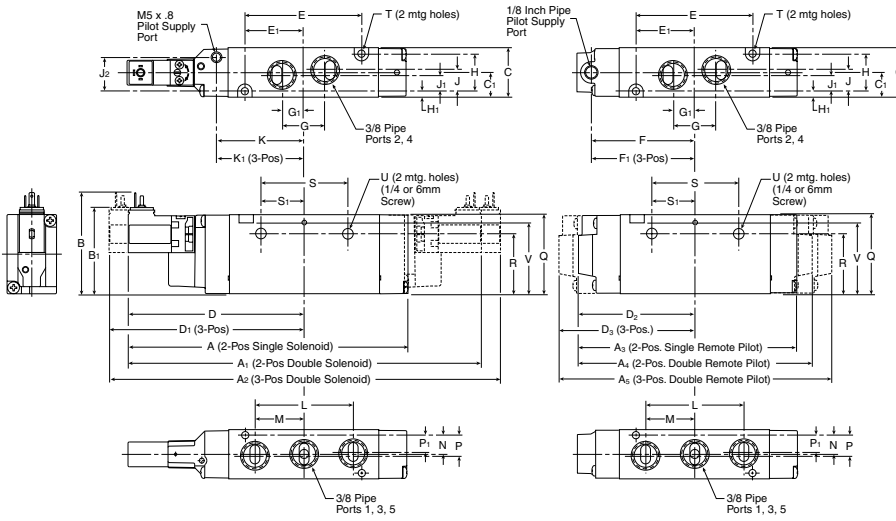

B6 4-Way Inline


A 6.67 (169.5)	A₁ 8.41 (213.7)	A₂ 9.35 (237.6)	A₃ 5.26 (133.7)	A₄ 5.59 (142.1)
A₅ 6.54 (166.0)	B 2.41 (61.3)	B₁ 2.06 (52.3)	C 1.18 (30.0)	C₁ .59 (15.0)
D 4.21 (106.8)	D₁ 4.68 (118.8)	D₂ 2.80 (71.0)	D₃ 3.27 (83.0)	E 2.79 (70.8)
E₁ 1.39 (35.4)	F 2.45 (62.3)	F₁ 2.92 (74.3)	G 1.03 (26.1)	G₁ .51 (13.1)
H .91 (23.0)	H₁ .14 (3.5)	J .51 (13.1)	J₁ .39 (10.0)	J₂ .81 (20.6)
K 2.09 (53.0)	K₁ 2.56 (64.9)	L 2.34 (59.4)	M 1.17 (29.7)	N .45 (11.5)
P .49 (12.5)	P₁ .41 (10.5)	Q 1.89 (48.0)	R 1.45 (36.8)	S 2.09 (53.0)
S₁ 1.04 (26.5)	T Ø .17 (4.4)	U Ø .27 (6.9)	V 1.69 (43.0)	

Inches (mm)

B6 Single Operators – 3-Way Inline

Solenoid

Remote Pilot

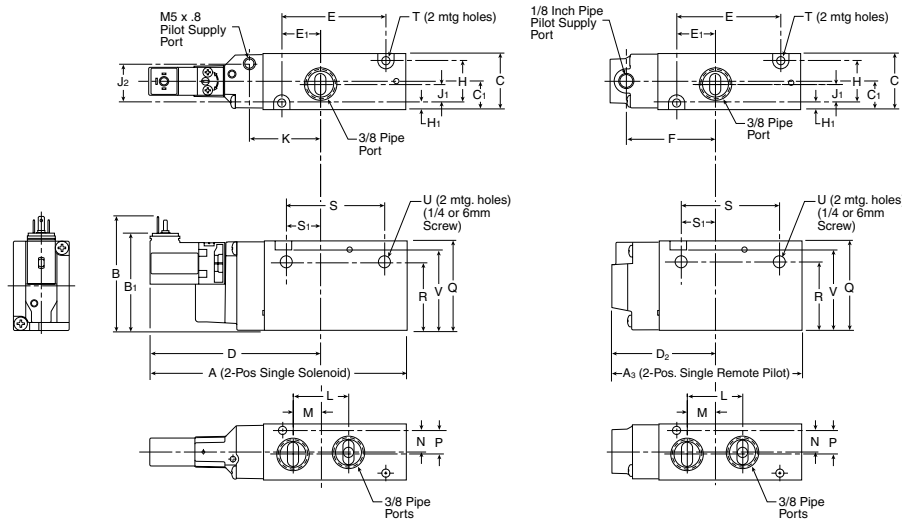

B6 3-Way Inline

A 5.42 (137.7)	A₃ 4.01 (101.9)	B 2.41 (61.3)	B₁ 2.06 (52.3)	C 1.18 (30.0)
C₁ .59 (15.0)	D 3.63 (92.1)	D₂ 2.22 (56.3)	E 2.19 (55.6)	E₁ 0.82 (20.7)
F 1.87 (47.6)	H .91 (23.0)	H₁ .14 (3.5)	J₁ .39 (10.0)	J₂ .81 (20.6)
K 1.51 (38.3)	L 1.17 (29.7)	M .59 (15.0)	N .45 (11.5)	P .49 (12.5)
Q 1.89 (48.0)	R 1.45 (36.8)	S 2.09 (53.0)	S₁ 0.76 (19.4)	T Ø .17 (4.4)
U Ø .27 (6.9)	V 1.69 (43.0)			

Inches (mm)

D

Viking
Lite

Viking
Xtreme


B

ADEX

N

B6

Single & Double Operators – 4-Way NAMUR Mount

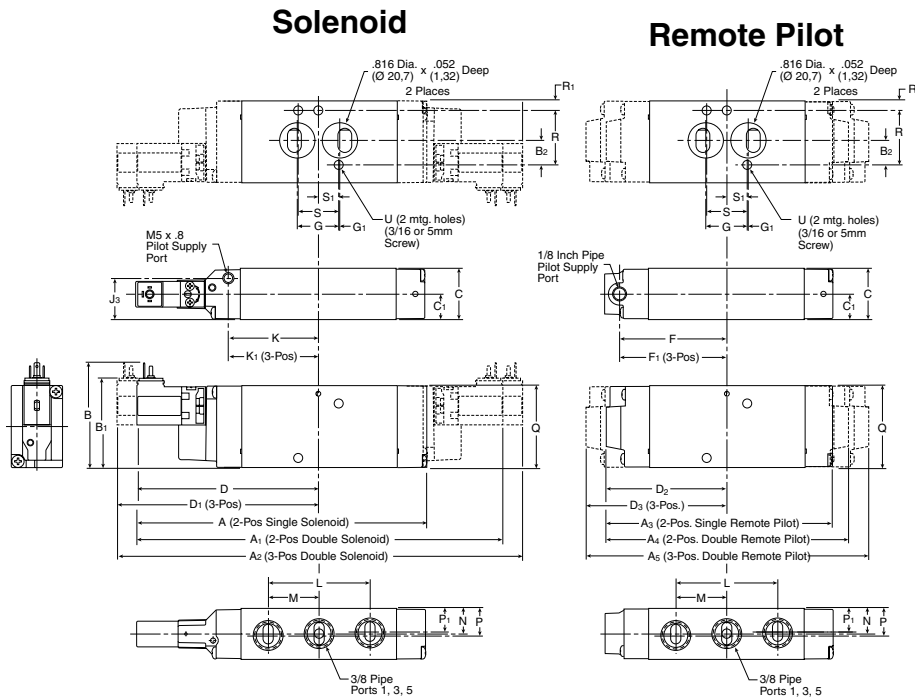


B6 4-Way NAMUR Mount

A 6.67 (169.5)	A₁ 8.41 (213.7)	A₂ 9.35 (237.6)	A₃ 5.26 (133.7)	A₄ 5.59 (142.1)
A₅ 6.54 (166.0)	B 2.41 (61.3)	B₁ 2.06 (52.3)	B₂ .57 (14.4)	C 1.18 (30.0)
C₁ .59 (15)	D 4.21 (106.8)	D₁ 4.68 (118.8)	D₂ 2.80 (71.0)	D₃ 3.27 (83.0)
F 2.45 (62.3)	F₁ 2.92 (74.3)	G .95 (24.2)	G₁ .02 (0.53)	J₃ .95 (24.1)
K 2.09 (53.0)	K₁ 2.56 (64.9)	L 2.34 (59.4)	M 1.17 (29.7)	N .59 (15)
P .63 (16)	P₁ .55 (14)	Q 1.89 (48.0)	R 1.26 (32)	R₁ .22 (5.5)
S .94 (24)	S₁ .47 (12)	T Ø .17 Ø (4.4)	U Ø .27 Ø (6.9)	

Inches (mm)

B6

Alternative Electrical Enclosure Option F

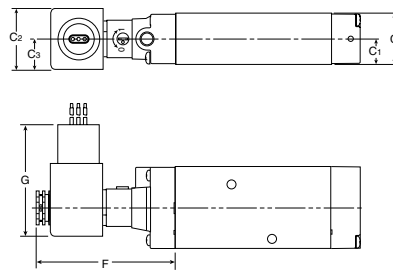

Hazardous Duty Solenoid Coil

B6 4-Way NAMUR Mount with Option F Enclosure

C 1.18 (30)	C₁ .59 (15)	C₂ 1.42 (36)	C₃ .71 (18)	F 3.15 (80)
G 2.60 (66)				

Inches (mm)

D

Viking Lite




Viking Xtreme

B

ADEX

N

B6 Single & Double Operators – 4-Way IEM Aluminum Bar

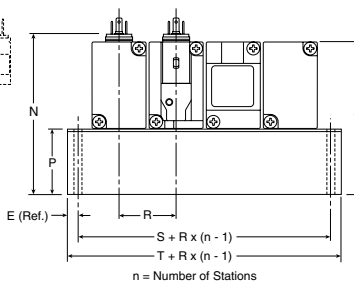
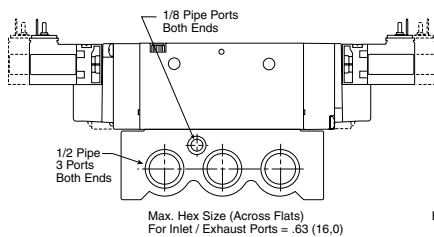
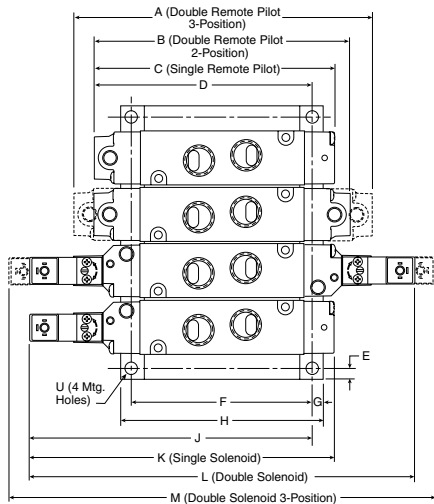


B6 4-Way IEM Aluminum Bar Manifold

A 6.54 (166.0)	B 5.59 (142.1)	C 5.26 (133.7)	D 4.76 (121.0)	E .24 (6.0)
F 3.94 (100.0)	G .24 (6.0)	H 4.41 (112.0)	J 6.17 (156.8)	K 6.67 (169.5)
L 8.41 (213.7)	M 9.35 (237.6)	N 3.60 (91.3)	P 1.54 (39.0)	Q 3.43 (87.0)
R 1.24 (31.5)	S 1.77 (45.0)	T 2.24 (57.0)	U ∅ .26 ∅ (6.5)	

Inches (mm)

B6 Single Operators – 3-Way IEM Aluminum Bar

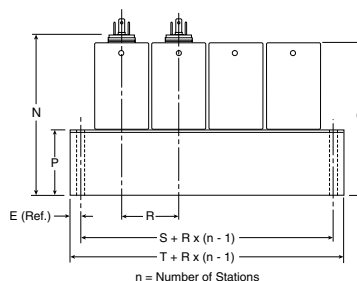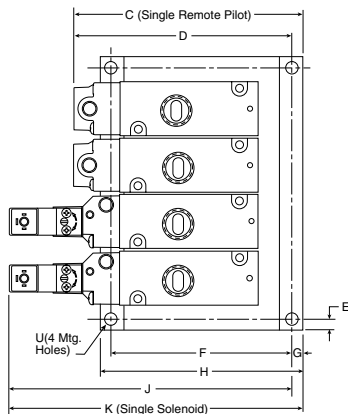

B6 3-Way IEM Aluminum Bar Manifold

C 5.00 (127.0)	D 4.76 (121.0)	E .24 (6.0)	F 3.94 (100.0)	G .24 (6.0)
H 4.41 (112.0)	J 6.17 (156.8)	K 6.41 (162.8)	N 3.60 (91.3)	P 1.54 (39.0)
Q 3.43 (87.0)	R 1.24 (31.5)	S 1.77 (45.0)	T 2.24 (57.0)	U ∅ .26 ∅ (6.5)

Inches (mm)

D

Viking Lite

Viking Xtreme






B

ADEX


N

B6

4-Way Alternative Electrical Enclosures

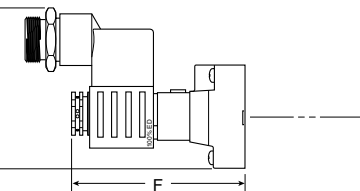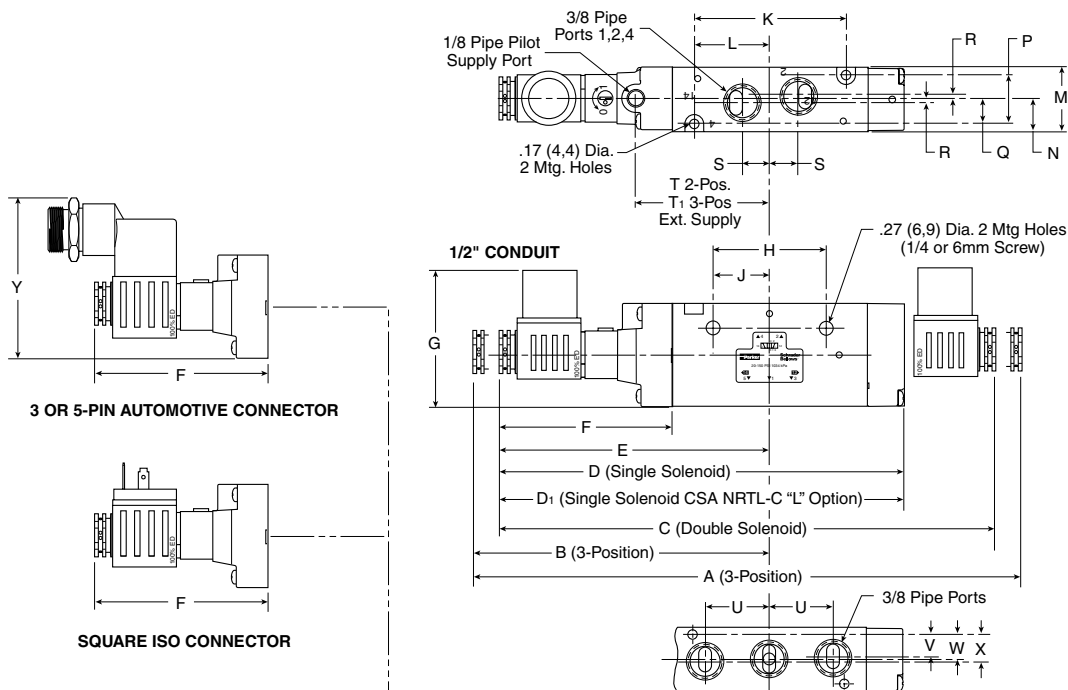

3-Way Alternative Electrical Enclosures

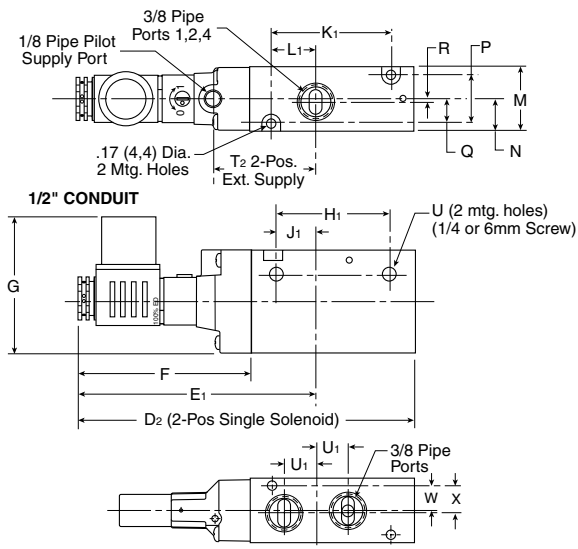

B6 Alternative – Electrical Enclosures Inches (mm)

A 10.84 (275.3)	B 5.41 (137.5)	C 9.89 (251.3)	D 7.41 (188.2)	D₁ 7.74 (196.6)	D₂ 6.17 (156.6)	E 4.94 (125.6)	E₂ 4.37 (111.0)	F 3.15 (80.0)	G 2.47 (62.8)	H 2.09 (53.0)	H₁ 2.09 (53.0)	J 1.04 (26.5)
J₁ 0.76 (19.4)	K 2.79 (70.8)	K₁ 2.19 (55.6)	L 1.39 (35.4)	L₁ .82 (20.7)	M 1.18 (30.0)	N .59 (15.0)	P .91 (23.0)	Q .45 (11.5)	R .06 (1.6)	S .51 (13.1)	T 2.45 (62.3)	T₁ 2.93 (29.7)
T₂ 1.89 (48.0)	U .59 (15.0)	U₁ .59 (15.0)	V .41 (10.5)	W .45 (11.5)	X .49 (12.5)	Y 2.90 (73.6)						

D	Viking Lite
	Viking Xtreme
B	
ADEX	
N	





B7 Single & Double Operators – 4-Way Inline

B8

Solenoid

Remote Pilot

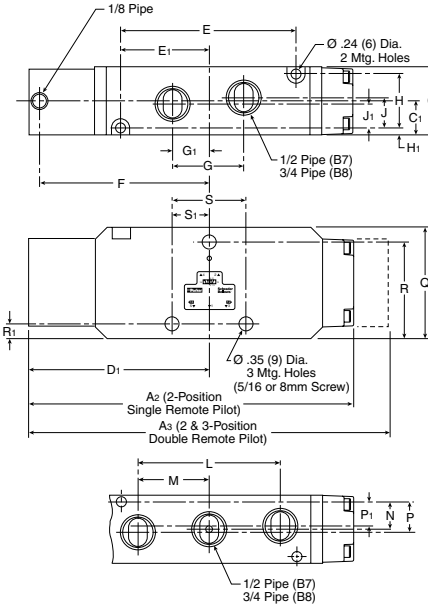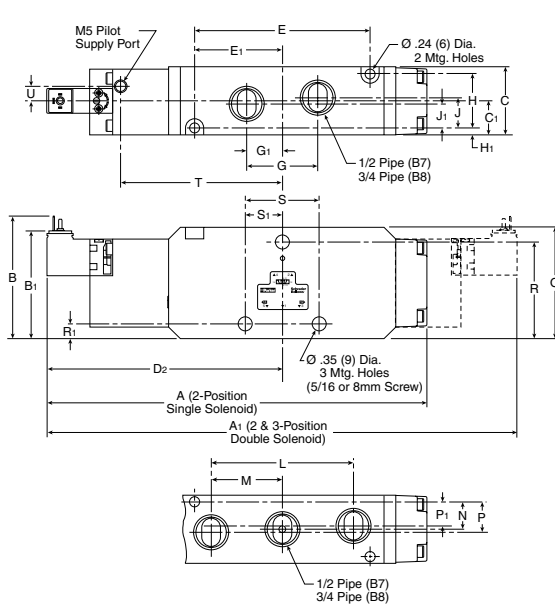

B7 & B8 4-Way Inline

A 9.13 (232)	A₁ 11.29 (287)	A₂ 7.79 (198)	A₃ 8.62 (219)
B 2.95 (75)	B₁ 2.59 (66)	C 1.65 (42)	C₁ .83 (21)
D₁ 4.29 (109)	D₂ 5.63 (143)	E 4.21 (107)	E₁ 2.13 (54)
F 4.06 (103)	G 1.73 (44)	G₁ .87 (22)	H 1.29 (33)
H₁ .16 (4)	J .75 (19)	J₁ .59 (15)	L 3.39 (86)
M 1.69 (43)	N .67 (17)	P .75 (19)	P₁ .59 (15)
Q 2.68 (68)	R 2.32 (59)	R₁ .35 (9)	S 1.81 (46)
S₁ .90 (23)	T 3.94 (100)	U .35 (9)	



Inches (mm)

B7 Single Operators – 3-Way Inline

B8

Solenoid

Remote Pilot

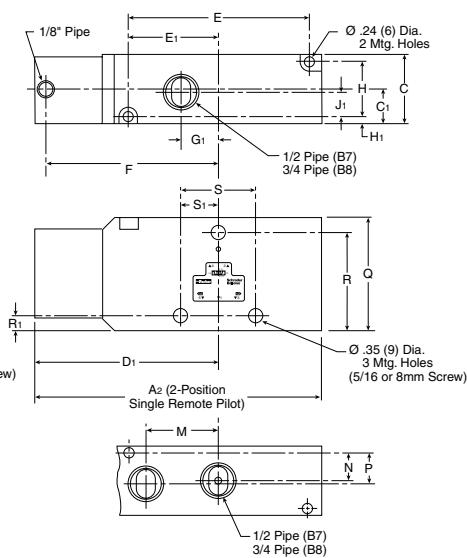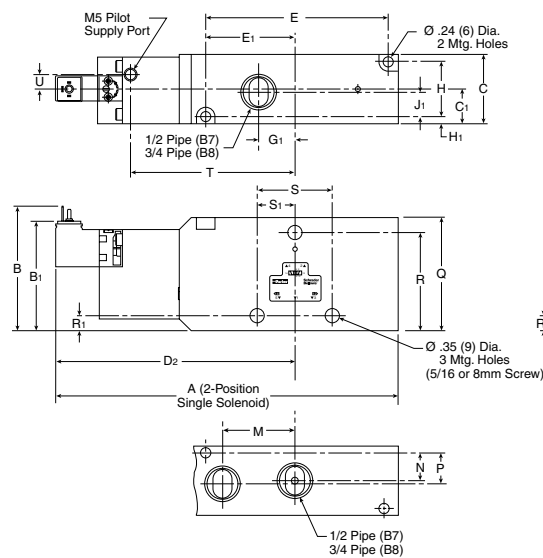

B7 & B8 3-Way Inline

A 7.99 (203)	A₂ 6.65 (169)	B 2.95 (75)	B₁ 2.59 (66)
C 1.65 (42)	C₁ .83 (21)	D₁ 4.29 (109)	D₂ 5.63 (143)
E 4.21 (107)	E₁ 2.13 (54)	F 4.06 (103)	G₁ .86 (22)
H 1.29 (33)	H₁ .16 (4)	J₁ .59 (15)	M 1.69 (43)
N .67 (17)	P .75 (19)	Q 2.68 (68)	R 2.32 (59)
R₁ .35 (9)	S 1.81 (46)	S₁ .90 (23)	T 3.94 (100)
U .35 (9)			

Inches (mm)

D

Viking
Lite

Viking
Xtreme



B

ADEX

N

B7 **Single & Double Operators – 4-Way IEM Aluminum Bar**

B8

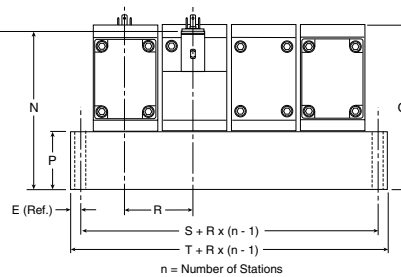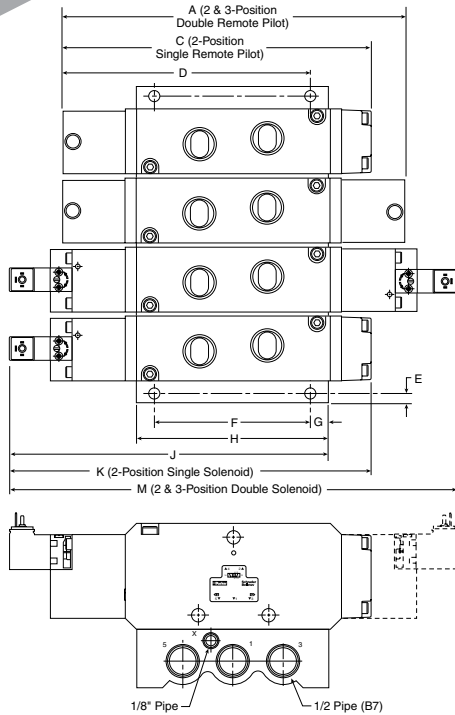



B7 & B8 4-Way IEM Aluminum Bar Manifold

A 7.79 (198)	C 8.62 (219)	D 6.26 (159)	E .24 (6)
F 3.94 (100)	G .45 (11.5)	H 4.84 (123)	J 8.07 (205)
K 9.13 (232)	M 11.29 (287)	N 4.00 (101.5)	P 1.48 (37.5)
Q 4.15 (105.5)	R 1.77 (45)	S 2.24 (57)	T 2.72 (69)

Inches (mm)

B7 **Single Operators – 3-Way IEM Aluminum Bar**

B8

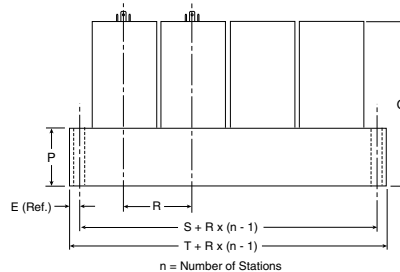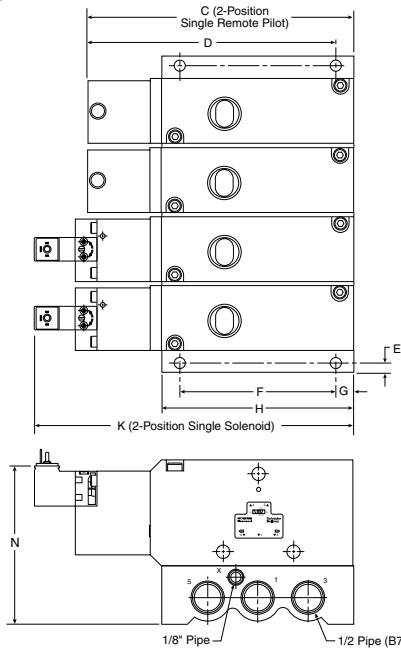

B7 & B8 3-Way IEM Aluminum Bar Manifold

C 6.65 (169)	D 4.92 (124.9)	E .24 (6)	F 3.94 (100)
G .45 (11.5)	H 4.84 (123)	K 7.99 (203)	N 4.00 (101.5)
P 1.48 (37.5)	Q 4.15 (105.5)	R 1.77 (45)	S 2.24 (57)
T 2.72 (69)			

Inches (mm)

D

Viking Lite

Viking Xtreme

B


ADEX

N






B7

B8

4-Way Alternative Electrical Enclosures

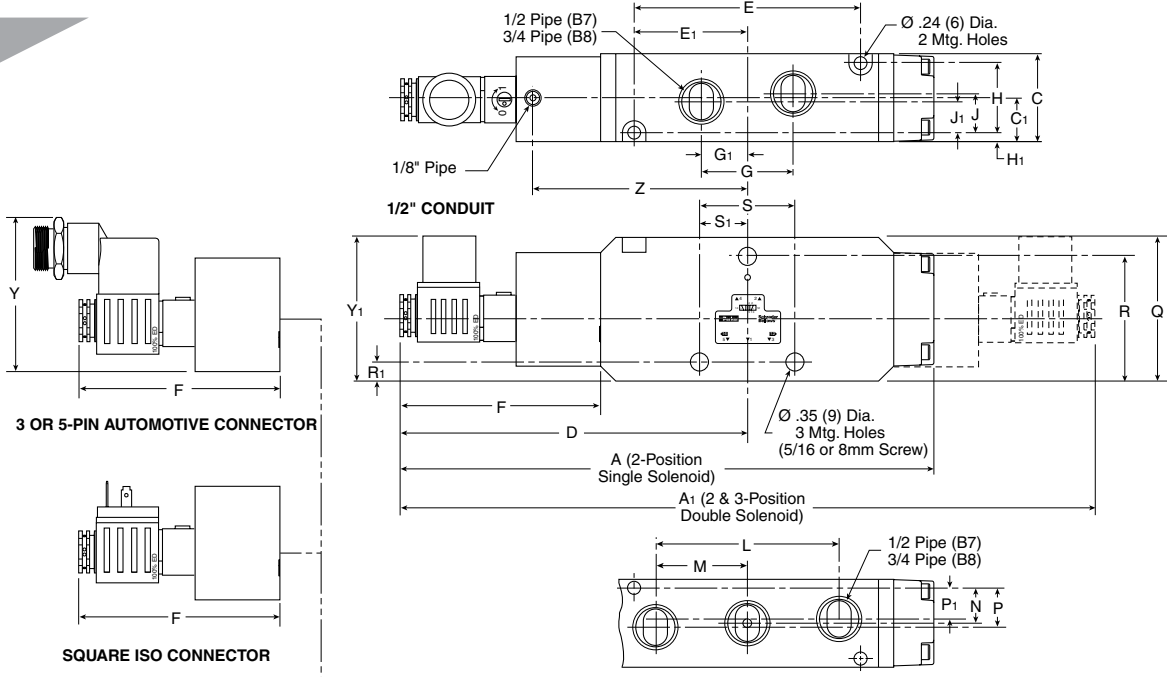

3-Way Alternative Electrical Enclosures

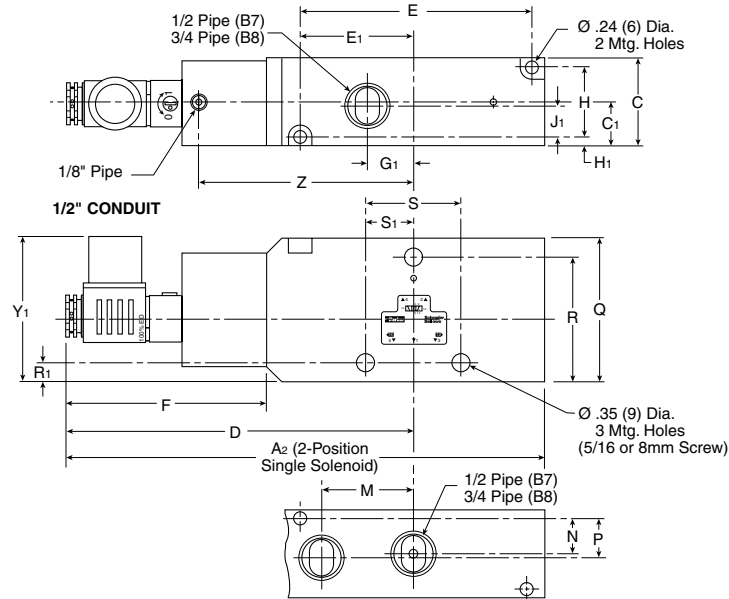

B7 & B8 3 & 4-Way Alternative – Electrical Enclosures Inches (mm)

A 9.92 (252)	A1 12.91 (328)	A2 8.78 (223)	C 1.65 (42)	C1 .83 (21)	D 6.46 (164)	E 4.21 (107)	E1 2.13 (54)	F 3.74 (95)	G 1.73 (44)	G1 .86 (22)	H 1.29 (33)	H1 .16 (4)
J .75 (19)	J1 .59 (15)	L 3.39 (86)	M 1.69 (43)	N .67 (17)	P .75 (19)	P1 .59 (15)	Q 2.68 (68)	R 2.32 (59)	R1 .35 (9)	S 1.81 (46)	S1 .90 (23)	Y 2.87 (73)
Y1 2.71 (69)	Z 3.98 (101)											

D

Viking
Lite

Viking
Xtreme

B

ADEX

N

Definitions & Weights

Definitions

- CSA C/US** Canadian Standards Association and UL Applicable.
- IP65** International classification system for sealing effectiveness for enclosures of electrical equipment. IP stands for "Ingress Protection" and the two digits XY stand for: X - protection from solid objects and Y - protection from moisture. IP 65 is protection from dust and water washdown.
- NEMA 4** National standard for electrical enclosure protection. NEMA 4 provides protection against dirt, dust, water hosedown and rain. (Similar to IP 65)
- DIN 43650C** International standard for the 15mm 3-Pin connector. The pin spacing is 8mm.
- 3-WAY** Valve has three ways for air to flow. Also designated as 3/2.
- 4-WAY** Valve has four ways for air to flow. Also designated as 5/2 for 2-Position and 5/3 for 3-Position.
- NC** Normally Closed. Pressure is blocked when in neutral position. (Normally Non-Passing)
- NO** Normally Open. Pressure passes thru when in neutral position. (Normally Passing)
- IEM** Inlet / Exhaust manifold. The inlet and exhaust ports are located in the manifold. The cylinder ports are accessed in the valve.
- 5-Port Subbase Bar Manifold**
Manifold that includes the inlet and outlet ports as well as the #2 & #4 cylinder ports. Utilizes a subbase valve less base.
- NLMOR** Non-Locking Manual Override. A constant actuation must be maintained for the valve to remain shifted.
- LMOR** Locking Manual Override. Valve remains shifted without constant end user override actuation.
- Surge Suppression**
Nullifies reverse EMF generated when a solenoid is de-energized.
- SCFM** Measure of air flow. Standard Cubic Feet per Minute at 68°F and 36% humidity at sea level.
- PSIG** Pounds per Square Inch measured with a gage. (Catalog pressure reflects PSIG)
- PSIA** Pounds per Square Inch atmospheric.
- kPa** Kilopascals. International measure of pressure. 145 PSIG = 1000 kPa
- PSIG = 0 → PSIA = 14.7 → In. of Hg = 0 → kPa = 0

Product Shipping Weights

Series	Single Solenoid	3-Position Solenoid	Manifold Stackable	Subbase	End Plate
B3	.25	.35	.20	.60	.50
B5	.70	.80	.20	.80	.70
B6	1.8	2.4	—	—	—
B7	2.5	2.9	—	—	—
B8	2.5	2.9	—	—	—

Weights are in pounds and are approximate.

"B" Series Valves Air Control Valves

Cv Calculations

Cv Measure of calculating flow of a valve (or other pneumatic device) that takes into effect the temperature, pressure, pressure drop, and flow. As a rule of thumb, a Cv of 1.0 is 25 SCFM with a 5 PSIG pressure drop.

$$Cv = \frac{\text{Cylinder Area (Sq. In.)} \times \text{Stroke (In.)} \times \text{Compression Factor (Table 1)}}{\text{(See Table 2)} \times \text{Stroke Time (sec.)} \times 28.8}$$

Table 1
Compression Factors and "A" Constants

Inlet Pressure (PSIG)	Compression Factor	"A" Constants for Various Pressure Drop*		
		2 PSI Δ P	5 PSI Δ P	10 PSI Δ P
10	1.6	.152	.103	
20	2.3	.126	.084	.065
30	3.0	.111	.073	.055
40	3.7	.100	.065	.048
50	4.4	.091	.059	.044
60	5.1	.085	.055	.040
70	5.7	.079	.051	.037
80	6.4	.075	.048	.035
90	7.1	.071	.046	.033
100	7.8	.068	.044	.032
110	8.5	.065	.042	.030
120	9.2	.063	.040	.029
130	9.9	.061	.039	.028
140	10.6	.058	.037	.027
150	11.2	.057	.036	.026
160	11.9	.055	.035	.025
170	12.6	.053	.034	.024
180	13.3	.052	.033	.024
190	14.0	.051	.032	.023
200	14.7	.050	.032	.023

Note: Use "A" constant at 5 PSI Δ P for most applications. On very critical applications, use "A" at 2 PSI Δ P. You will find in many cases, a 10 PSI Δ P is not detrimental, and can save money and mounting space.

* Tabulated values are the solution of $\frac{1}{22.48} \sqrt{\frac{GT}{(P_1 - P_2) P_2}}$ where T is for 68°F and G = 1 for Air.

Table 2
Effective Square-Inch Areas for Standard-Bore-Size Cylinders

Bore Size	Cylinder Area (Sq. In.)	Bore Size	Cylinder Area (Sq. In.)
3/4"	.44	4"	12.57
1"	.79	4-1/2"	15.90
1-1/8"	.99	5"	19.64
1-1/4"	1.23	6"	28.27
1-1/2"	1.77	7"	38.48
1-3/4"	2.41	8"	50.27
2"	3.14	10"	78.54
2-1/2"	4.91	12"	113.10
3-1/4"	8.30	14"	153.94
3-5/8"	10.32		



Notes

D

Viking
Life

Viking
Xtreme

B

ADEX

N



“ADEX” Series

Air Control Valves


A00 – .01 Cv M3 Port

A05 – .18 Cv M5 Port

A12 – .47 Cv 1/8" Port

Section D

www.parker.com/pneu/adex

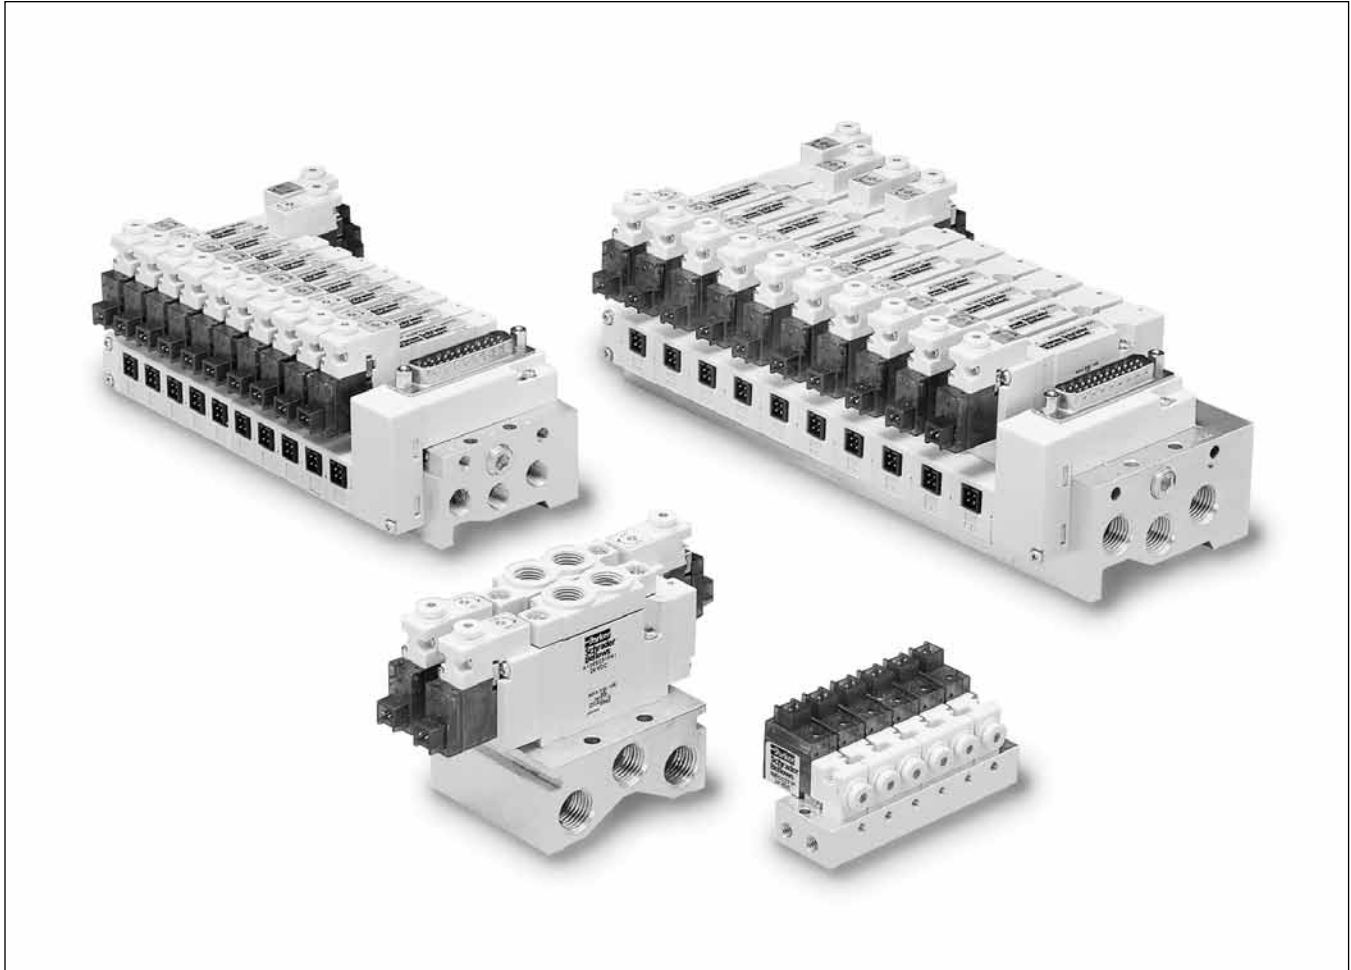

D

Viking Lite

Viking Xtreme

B

ADEX

N


Basic Valve Functions	D88	Ordering Information	
Basic Valve Features	D89	Collective Wiring.....	D95
Common Part Numbers – P / R Type Valves	D90	Pin Mapping	D95
Model Number Index – P / R Type Valves.....	D91	Ordering Information	
Common Part Numbers		Kits & Accessories	D96-D100
A00 Subbase Valve	D92	Technical Information.....	D101
IEM Bar Manifold.....	D93	Dimensions	
Subbase Bar Manifold	D94	A00	D102
		A05 P / R and A12 P / R.....	D103-D106

BOLD ITEMS ARE MOST POPULAR.



Single Solenoid

4-Way, 2-Position




De-energized position – Solenoid operator 14 de-energized.
 Pressure at inlet port 1 connected to outlet port 2.
 Outlet port 4 connected to exhaust port 5.

Energized position – Solenoid operator 14 energized.
 Pressure at inlet port 1 connected to outlet port 4.
 Outlet port 2 connected to exhaust port 3.

Single Solenoid

3-Way, 2-Position NC




Normally Closed:

De-energized position – Solenoid 12 de-energized.
 Pressure at inlet port 1 blocked, outlet port 2 connected to exhaust port 3.

Energized position – Solenoid 12 energized.
 Pressure at inlet port 1 connected to outlet port 2, exhaust port 3 is blocked.

Double Solenoid

4-Way, 2-Position



Solenoid operator 14 energized last.
 Pressure at inlet port 1 connected to outlet port 4.
 Outlet port 2 connected to exhaust port 3.

Solenoid operator 12 energized last.
 Pressure at inlet port 1 connected to outlet port 2.
 Outlet port 4 connected to exhaust port 5.


Vacuum Applications (Device becomes NO):

- '1' port is connected to atmosphere or compressed air † when required.
- '2' port is outlet
- '3' port is connected to vacuum

† When both vacuum and compressed air are required, maximum pressure is 85 PSIG (586 kPa).

Double Solenoid

4-Way, 3-Position

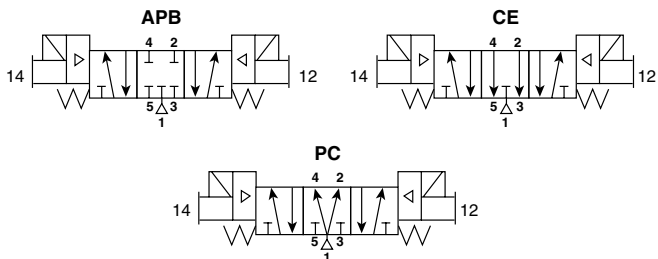

With 12 operator energized – inlet port 1 connected to cylinder port 2, cylinder port 4 connected to exhaust port 5.

With 14 operator energized – inlet port 1 connected to cylinder port 4, cylinder port 2 connected to exhaust port 3.

Function 1: All Ports Blocked (APB)

All ports blocked in the center position.

Function 2: Center Exhaust (CE)

Cylinder ports 4 and 2 connected to exhaust ports 5 and 3 in center position. Port 1 is blocked.

Function 3: Pressure Center (PC)


Pressure port 1 connected to cylinder ports 4 and 2, and exhaust ports 5 and 3 blocked in center position.

Dual Pressure (Subbase valves only):

May be used for dual pressure service with pressure at ports 3 & 5. **Specify External Pilot option “X” on Valve AND Manifold.** In the 3-Position valve, the effect of dual pressure is extremely important when the valve is in the center position, as the CE and PC functions are reversed. Therefore, care should be used when selecting a 3-Position valve.

Single Solenoid

3-Way, 2-Position NO*



Normally Open:

De-energized position – Solenoid 12 de-energized.
 Pressure at inlet port 3 connected to outlet port 2, exhaust port 1 is blocked.

Energized position – Solenoid 12 energized. Pressure at inlet port 3 blocked, outlet port 2 connected to exhaust port 1.

* To obtain NO function, ports 1 & 3 are reversed (1 becomes exhaust and 3 becomes supply).

Vacuum Applications (Device becomes NC):

- '1' port is connected to vacuum
- '2' port is outlet
- '3' port is connected to atmosphere or compressed air † when required.

† When both vacuum and compressed air are required, maximum pressure is 58 PSIG (400 kPa).

Caution: Normally Open and Normally Closed 3-Way valve cannot be mixed on the same manifold.

D

Viking
Lite

Viking
Xtreme

B

ADEX

N

“A00” Valve

“A05” Valve

“A12” Valve

Flow Ratings*

- A00: .02 Cv
- A05: .18 Cv
- A12: .47 Cv

Operating Pressure

- Vacuum to 100 PSIG*
- A00S (NO) vacuum to 70 PSIG

Ports

- A00: M3
- A05: M5
- A12: 1/8 Inch


Mounting

- Inline
- Subbase Mount


Solenoids

- 0.6 Watt
- 5VDC, 12VDC, 24VDC and 110/120VAC
- LED and Surge Suppression


* See catalog technical section for more information.



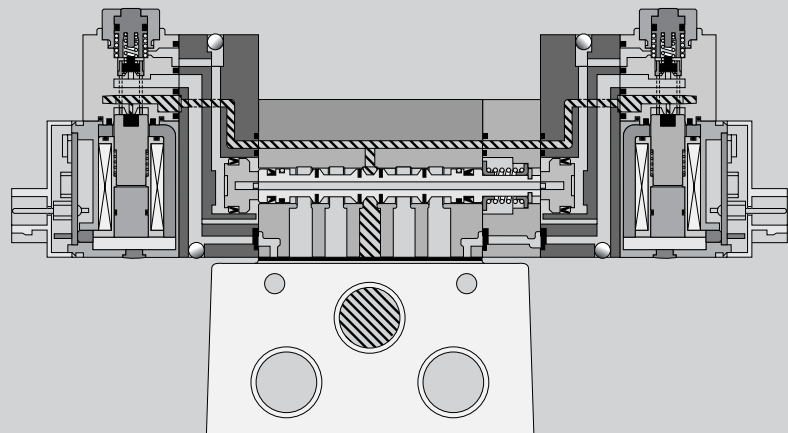

A00S Single Solenoid Normally Closed (NC)

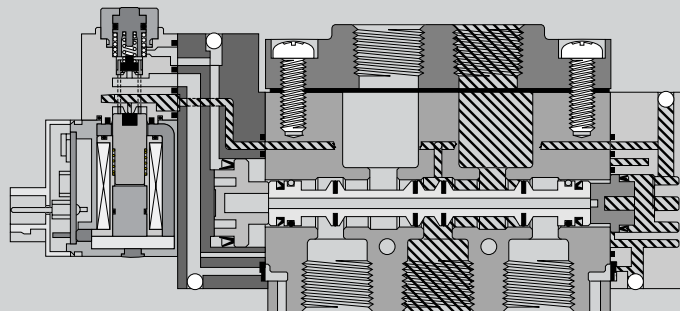

A05P Double Solenoid 3-Position Subbase Mounted



A12R Single Solenoid Inline

 Pressure  Exhaust

D

Viking Lite

Viking Xtreme



B

ADEX

N

Single Solenoid

4-Way, 2-Position

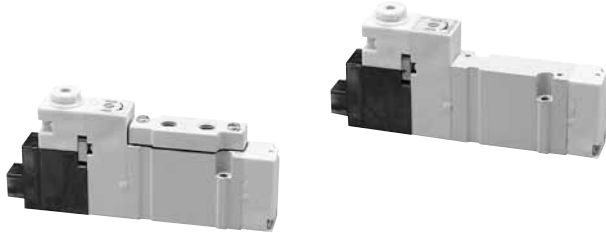

Inline

A05	A05RS251PM5MF	24VDC	M5	.17 Cv
	A05RS252PM5MF	12VDC		
A12	A12RS251PN1MF	24VDC	1/8"	.47 Cv
	A12RS252PN1MF	12VDC		



Subbase

A05	A05PS251P	24VDC	Less Base	.18 Cv
	A05PS252P	12VDC		
A12	A12PS251P	24VDC	Less Base	.44 Cv
	A12PS252P	12VDC		

Note: Wired electrical connectors sold separately. See Accessory Section.

Double Solenoid

4-Way, 2-Position

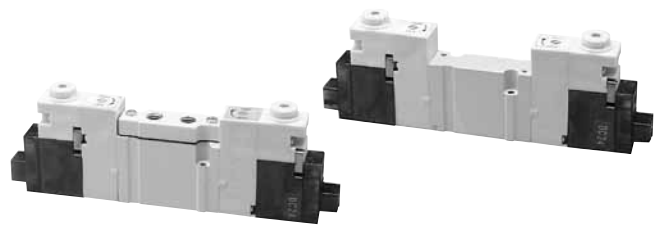

Inline

A05	A05RD251PM5MF	24VDC	M5	.17 Cv
	A05RD252PM5MF	12VDC		
A12	A12RD251PN1MF	24VDC	1/8"	.47 Cv
	A12RD252PN1MF	12VDC		

Subbase

A05	A05PD251P	24VDC	M5	.18 Cv
	A05PD252P	12VDC		
A12	A12PD251P	24VDC	1/8"	.44 Cv
	A12PD252P	12VDC		

D

Viking Lite

Viking Xtreme


B

ADEX

N

Double Solenoid

4-Way, 3-Position, APB



Inline

A05	A05RD351PM5MF	24VDC	M5	.16 Cv
	A05RD352PM5MF	12VDC		
A12	A12RD351PN1MF	24VDC	1/8"	.43 Cv
	A12RD352PN1MF	12VDC		

Subbase

A05	A05PD351P	24VDC	Less Base	.16 Cv
	A05PD352P	12VDC		
A12	A12PD351P	24VDC	Less Base	.40 Cv
	A12PD352P	12VDC		

ANSI Cv vs. JIS Cv

For Pneumatic Valve flow, the measurement **Cv** – Coefficient of Flow – is used to convey to the user how much air can flow through a given valve. Most valve manufacturers publish this information in their catalogs to assist the user in choosing the proper valve for their application. In publishing this data however, there are discrepancies in how the **Cv** is calculated, resulting in some **Cv**'s being **OVERSTATED** by **20 to 40%**. This can adversely affect the user's application because the valve flows **LESS** than the published **Cv**.


The reason for the large discrepancy is in the method of calculation - the ANSI (NFPA) or the JIS standard.

Parker's **Cv** valve is calculated using the ANSI (NFPA) T3.21.3-1990 standard. The ANSI (NFPA) method is a structured test using very specific tube sizes and lengths, inlet pressures and pressure drops, and volume chambers.

Locking Flush Override. Mounting screws and gaskets included with valve.

“ADEX” Series

BOLD OPTIONS ARE MOST POPULAR.

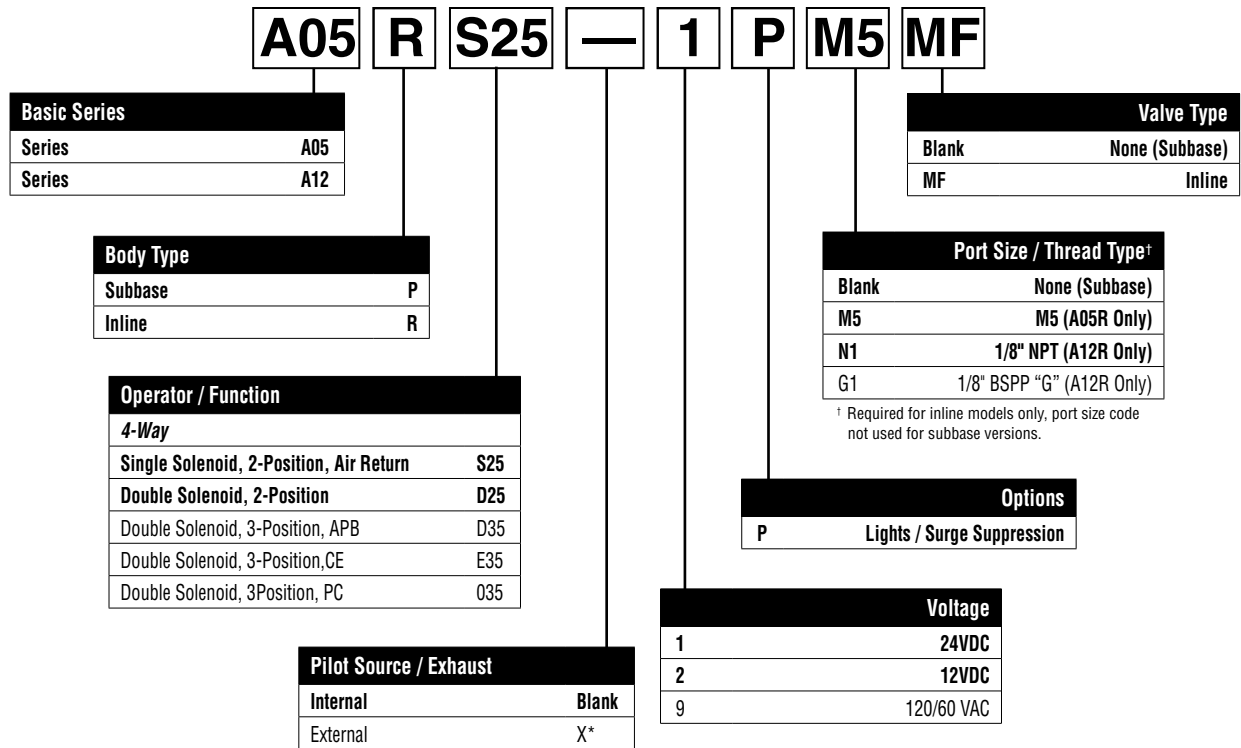

D
Viking Lite
Viking Xtreme
B
ADEX
N

**Valve Only – Single Solenoid
 3-Way, 2-Position***



A00SC231P Shown

* Screwdriver-Operated, Locking Manual Override (LMOR).

A00S	C23	—	1	P
Function Single Solenoid Normally Open 023 Single Solenoid Normally Closed C23			Connector Position With Indicator Light & Surge Suppression P	
Flow Standard Type Blank Large Flow Type J			Voltage 1 24VDC 2 12VDC 4* 5VDC 8* 110/50 VAC 9 120/60 VAC	

* Special Order

D

Subbase



A00SBM3 Shown

Model Number	All Ports
A00 A00SBM3	M3

Mounting screws and gaskets included with valve.

Viking Lite

Viking Xtreme

B

ADEX

N

Manifold*



MMFS6A00M3 Shown

MMFS	2	A00	M5
Number of Stations 2 Stations 2 3 Stations 3 4 Stations 4 • • • • 20 Stations 20		Port Size M3 M5	

* Normally Closed valves (A00SC23•P) and Normally Open valves (A00S023•P) cannot be mounted on the same manifold simultaneously.

Mounting screws and gaskets included with valve.

BOLD OPTIONS ARE MOST POPULAR.



Common Part Numbers

**“ADEX” Series Valves
IEM Bar Manifold**

“A05” Valve



MMFU10A05F Shown

4-Way, NPTF (Individual Wiring Type)	MMFU##A05F
4-Way, NPTF (Collective Wiring Type)	MMCU##A05F

– stations 2 to 20
– stations 2 to 12
(Even numbers only)

“A12” Valve



MMFU10A12F Shown

4-Way, NPTF (Individual Wiring Type)	MMFU##A12F
4-Way, NPTF (Collective Wiring Type)	MMCU##A12F


– stations 2 to 20
– stations 2 to 12
(Even numbers only)

- Utilizes Inline mount ADEX valves.
- Bolts and Gaskets are included with valve.
- A05 Collective Wiring Type Manifold Kits also include an Adapter Plate for use with the MCS Module.

Pilot Exhaust for IEM Manifold –
is captured through the “3” and “5” galley.

Model Number


BOLD OPTIONS ARE MOST POPULAR.

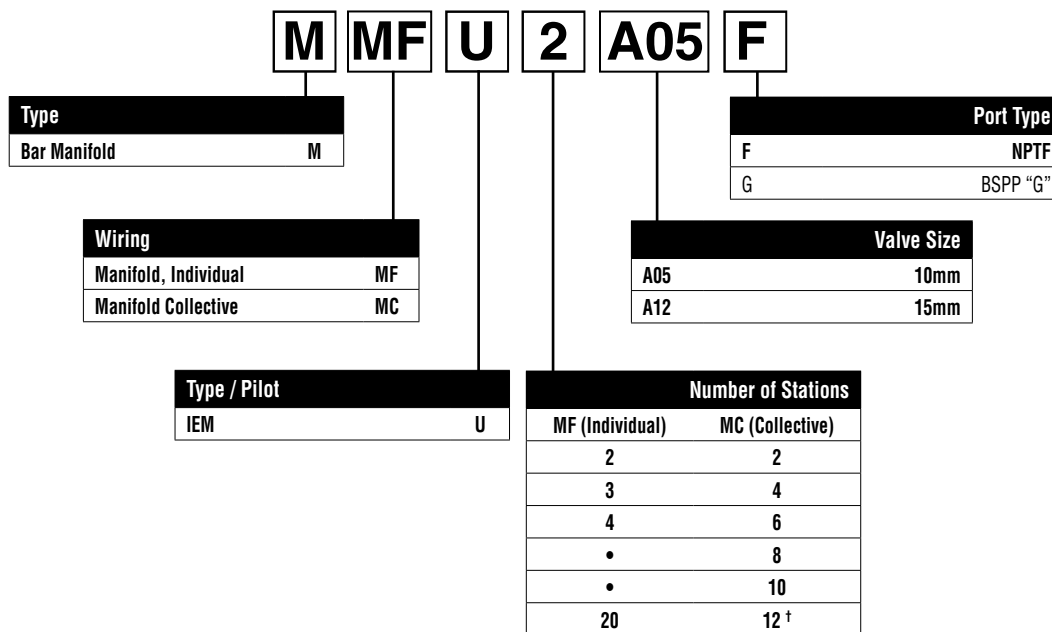

[†] Maximum of 12 stations available for “MC” Type. (Even # stations only.)




“A05” Valve

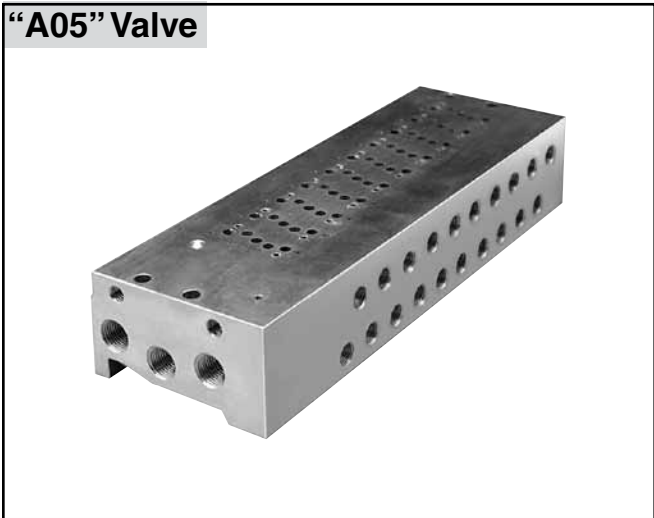

4-Way, M5 (Individual Wiring Type)	MMFS##A05FM5
4-Way, M5 (Collective Wiring Type)	MMCS##A05FM5

– stations 2 to 20
– stations 2 to 12
(Even numbers only)

“A12” Valve

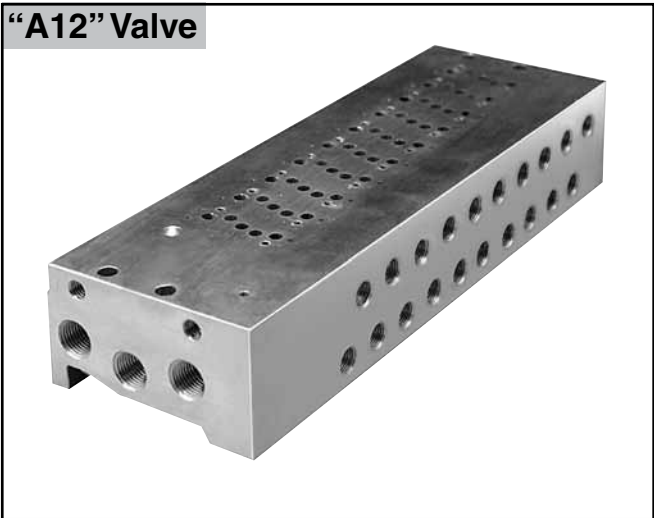

4-Way, 1/8" NPTF (Individual Wiring Type)	MMFS##A12FF1
4-Way, 1/8" NPTF (Collective Wiring Type)	MMCS##A12FF1

– stations 2 to 20
– stations 2 to 12
(Even numbers only)


- Utilizes Subbase mount ADEX valves.
- Bolts and Gaskets are included with valve.

Internally Piloted Manifolds –
Pilot exhaust is captured through the “3” and “5” galley.

Externally Pilot Manifold –
Pilot exhaust is captured through the “Y” galley.

Model Number

BOLD OPTIONS ARE MOST POPULAR.

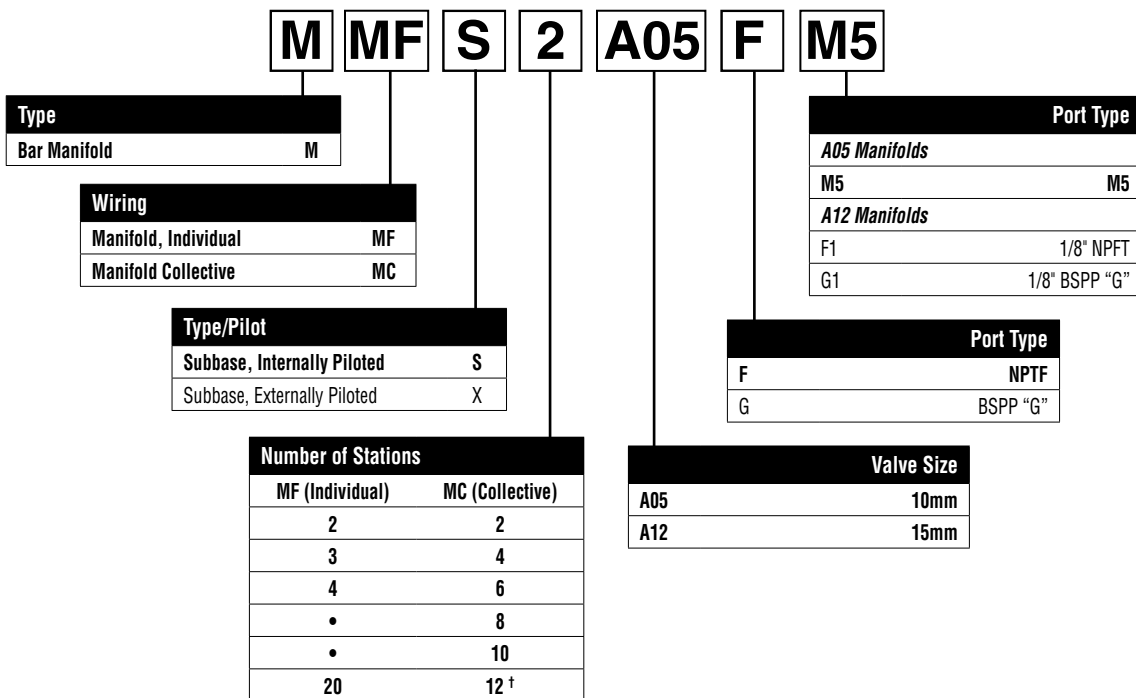

[†] Maximum of 12 stations available for "MC" Type. (Even # stations only.)

D

Viking Lite



Viking Xtreme

B

ADEX


N

Collective Wiring

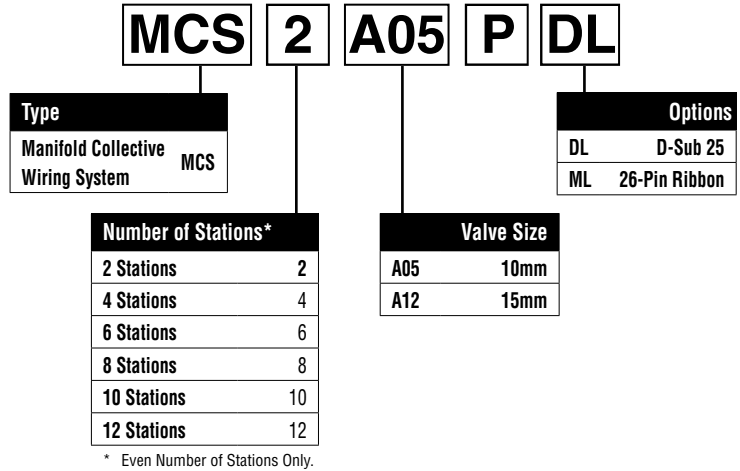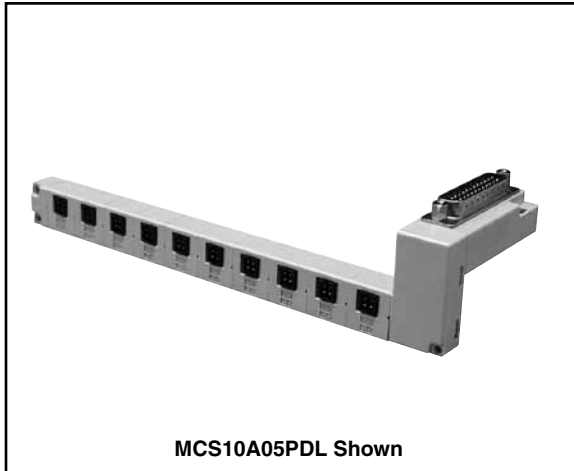

BOLD OPTIONS ARE MOST POPULAR.

Collective Wiring Pin Mapping (Not Available for AC Voltages)

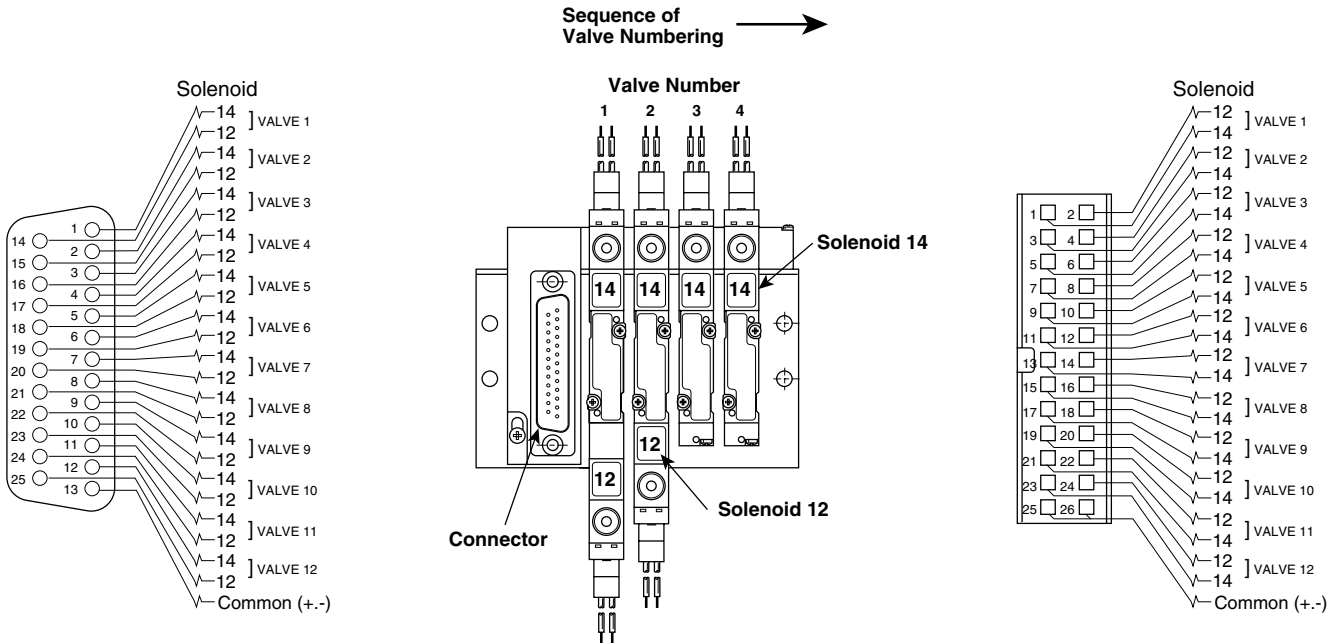

Pin Map for D-Sub 25 Connector

Valve and Solenoid Addresses

Pin Map for 26-Pin Ribbon Connector

Notes:


- The MCS Collective Wiring System is “Polarity Neutral”. Polarity is addressed with the Collective Wired Connectors (page D120).
Example: When ‘positive’ common is used, an A05 single solenoid valve uses an A05PSCC. When ‘negative’ common is used, use A05PSCCM.
- The MCS Collective Wiring System provides for both the “14” and “12” addresses at each valve location. When single solenoid valves are used, skip the “12” address for both wiring and controller programming.
- Be sure that the leakage current of the controller outputs is less than 1.5 ma.

Ordering Information

Individual Wired Connectors

P / R Type

Size	Voltage	Length	Part Number
A00	DC	.5 meter	A05PDCCL5
A05		1 meter	A05PDCCL10
A12		3 meter	A05PDCCL30
A12	AC	.5 meter	A05PACCL5
		1 meter	A05PACCL10

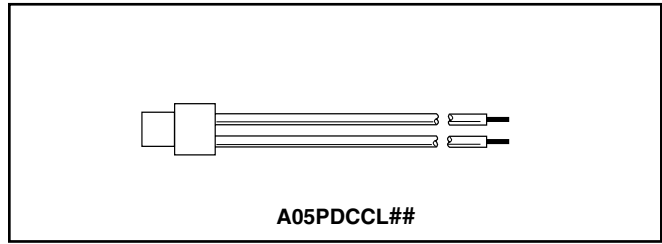


DC Voltage: Positive “+” (Red Wire)
Negative “-” (Black Wire)
AC Voltage: Both Wires are Blue (Polarity Neutral)

D

Collective Wired Connectors

P / R Type

Size		Part Number	
		PNP	NPN
A05	Single	A05PSCCM	A05PSCC
A12	Double	A05PDCCM	A05PDCC

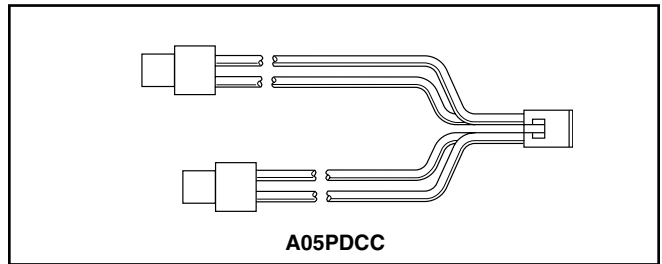

PNP = SOURCING = “Negative Common” = Yellow Wires
NPN = SINKING = “Positive Common” = Red Wires

Viking
Lite

Viking
Xtreme

B


ADEX

N

Wired Connectors with Protective Cover - P / R Type

Size	Length	Part Number
A00	1 meter	A05PDCCB10
A05		
A12		


The cover is made of chloroprene rubber for electrical use, assuring excellent weather and insulation resistance. However, be careful not to place it under splash of cutting oil.

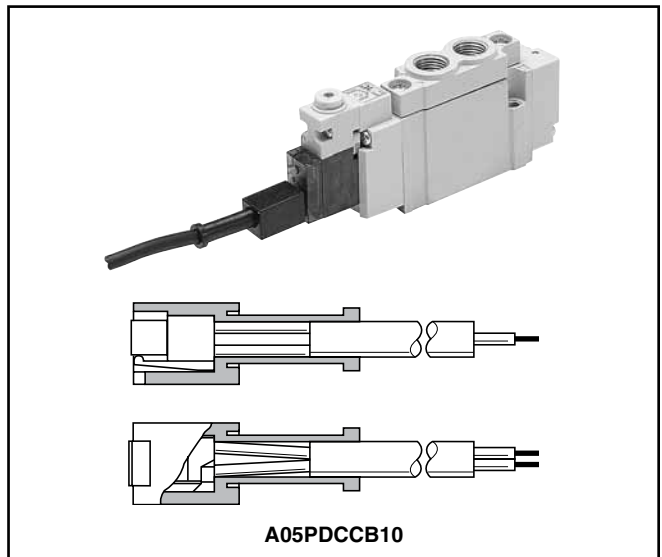

Cable with Female D-Sub, 25-Pin Connector


Part Number	Description
DSS25FB1K	25-Pin, D-Sub Cable, 1 meter (3.3 ft.)

Note: For use with ADEX MCS system only.
Connection to control system is through 25 colored wires AWG 24. Includes (2) M2.5 mm screws.

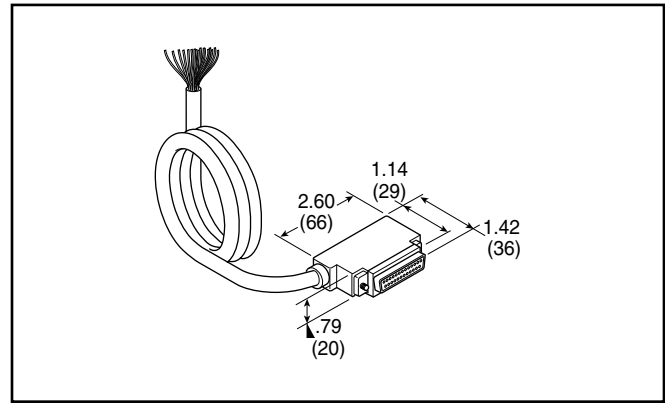

Blanking Plate


Size	Type	Part Number
A00	Subbase	A00SBP
A05	Body Ported	A05RGBP
	Subbase	A05PGBP
A12	Body Ported	A12RGBP
	Subbase	A12PGBP

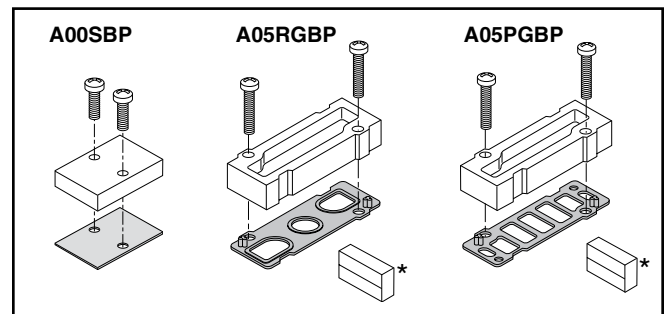

* Outlet Pin Cover used with Collective Wiring System only.

Extended Override Cover

Size	Orange: For 14 Side Solenoid	Green: For 12 Side Solenoid
A00	A05PLA	A05PLB
A05		
A12		

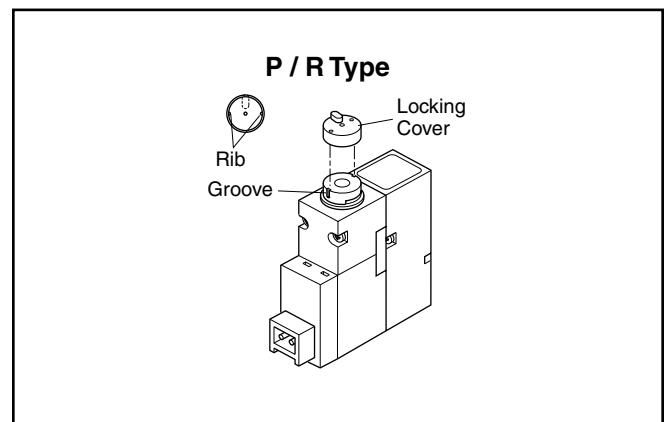

D

Viking
Lite

Viking
Xtreme

B


ADEX

N

Mounting Bracket

Size	Type	Part Number
A05	Side	A05RBS
	Foot	A05RBF
A12	Side	A12RBS
	Foot	A12RBF


Kit Includes: (1) Bracket, (2) Screws

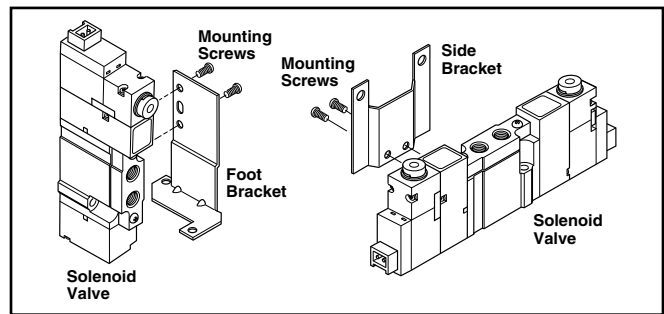

Subbases

Size	Port Size	Part Number
A05	1/8" NPT	A05PBN1
	1/8" BSPP "G"	A05PBG1
A12	1/4" NPT	A12PBN2
	1/4" BSPP "G"	A12PBG2

Kit Includes: (1) Subbase (Holddown Bolts and Gasket are included with valve)

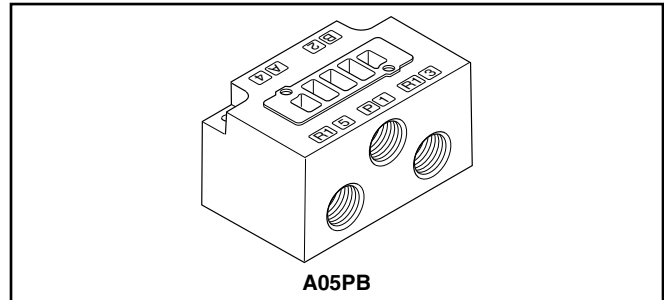

Individual Air Supply Spacer


Mounts between valve and manifold. Supply from the manifold is blocked and only the valve mounted on the spacer receives the individual supply.

Size	Type	Port Size	Internal Pilot Part Number	External Pilot* Part Number
A05	Inline	M5	A05RAISM5	A05RAXISM5
	Subbase	M5	A05PAISM5	A05PAXISM5
A12	Inline	1/8" NPT	A12RAISN1	A12RAXISN1
	Subbase	1/8" NPT	A12PAISN1	A12PAXISN1

Can only be used on Collective wiring type manifolds.

* Can only be used with External Piloted valve. External pilot is located on the X Port of the manifold

Kit Includes: (1) Spacer, (2) Screws, and (1) Gasket

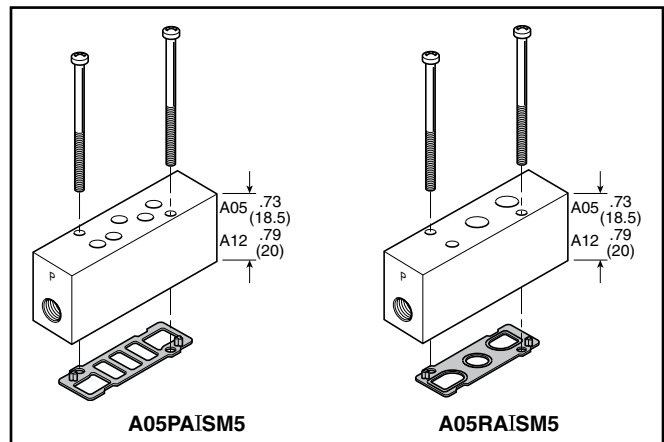

Individual Air Exhaust Spacer


Mounts between valve and manifold. Exhaust from the manifold is blocked and only the valve mounted on the spacer has the individual exhaust.

Size	Type	Port Size	Internal Pilot Part Number	External Pilot* Part Number
A05	Inline	M5	A05RAIEM5	A05RAXIEM5
	Subbase	M5	A05PAIEM5	A05PAXIEM5
A12	Inline	1/8" NPT	A12RAIEN1	A12RAXIEN1
	Subbase	1/8" NPT	A12PAIEN1	A12PAXIEN1

Can only be used on Collective wiring type manifolds.

* Can only be used with External Piloted valve. External pilot is located on the X Port of the manifold

Kit Includes: (1) Spacer, (2) Screws, and (1) Gasket

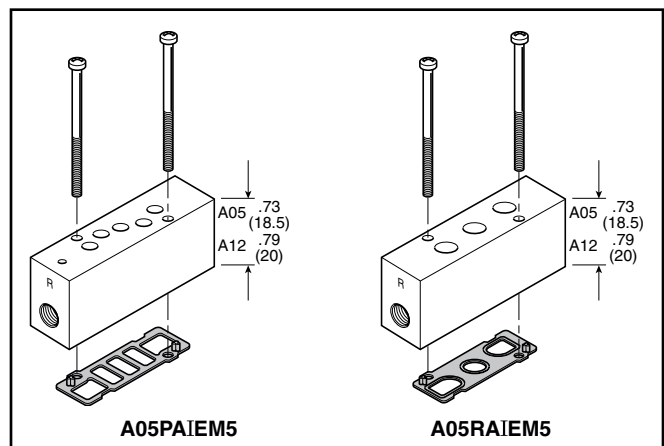

D

Viking
Lite

Viking
Xtreme


B

ADEX

N

Labeling Tag


Size	Description	Part Number
A05	White Label Tag	A05PN
A12		

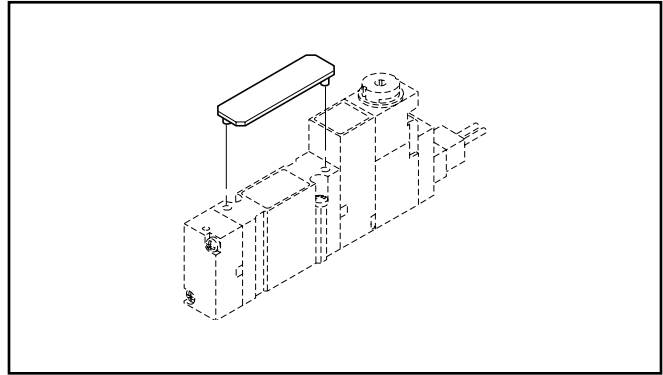

Exhaust Mufflers


Male Thread	Model Number
M5	P6M-PAC5
1/8" NPT	EM12
1/4" NPT	EM25

P6M - Plastic; EM - Sintered Bronze

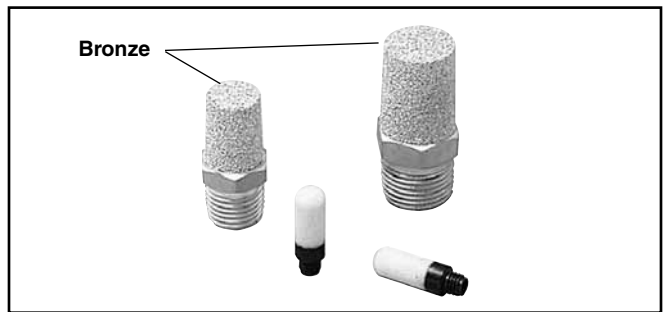


Plastic Silencers

Thread Size	Part Number		A (mm)	B (mm)
	NPT	BSPT "R"		
M5	AS-5		.43 (11)	.32 (8)
1/8"	ASN-6	AS-6	1.57 (40)	.63 (16)
1/4"	ASN-8	AS-8	2.56 (65)	.83 (21)

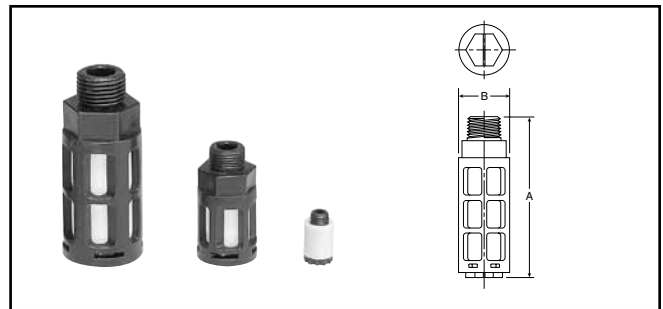

M3 & M5 Fittings

Description	Part Number
M5 Plug Fitting	N220-1900J
M3 to 3mm Barb	BC03M3
M3 to 4mm Barb	BC04M3
M5 to 3mm Barb	BC03M5

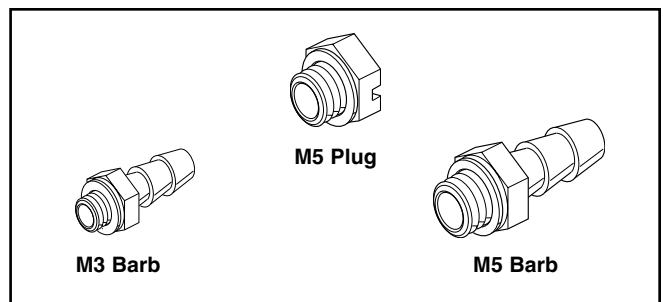

D

Viking Lite

Viking Xtreme


B

ADEX

N

DIN Rail


Part Number	Description
AM1DE200	6 Foot Rail Length

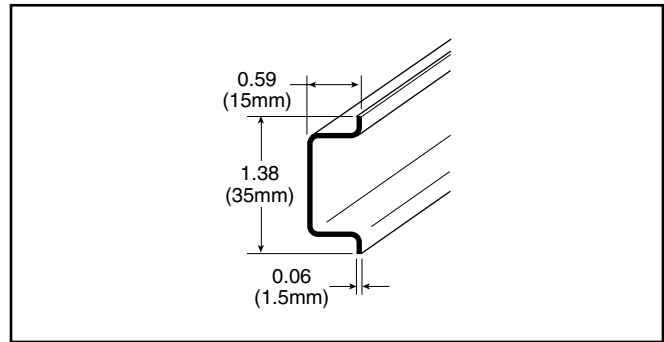

DIN Rail Hardware Kit


Size	Type	Part Number	Dimensions		
			A	B	C
A05	IEM	MFUA05DB	2.24	1.00	.31
	Subbase	MFSA05DB	(57)	(25)	(8)
A12	IEM	MFUA12DB	2.91	1.00	.39
	Subbase	MFSA12DB	(74)	(25)	(10)

Kit includes: (2) Screws, (2) Clamps

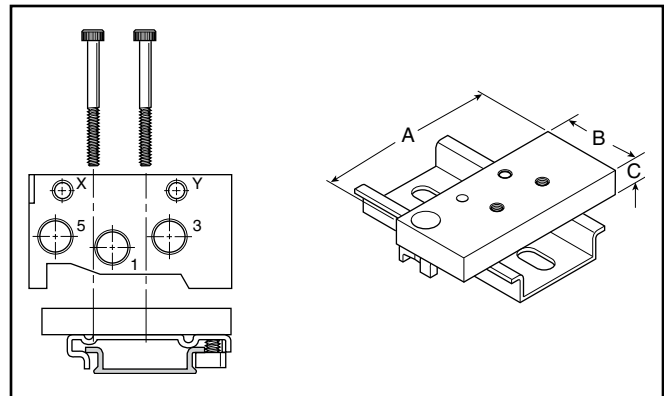

**Replacement Kits
Cylinder Port Plate Kits**


Size	Fitting	Part Number
A05	M5	A05RABM5
A12	1/8" NPT	A12RABN1
	1/8" BSPP "G"	A12RABG1

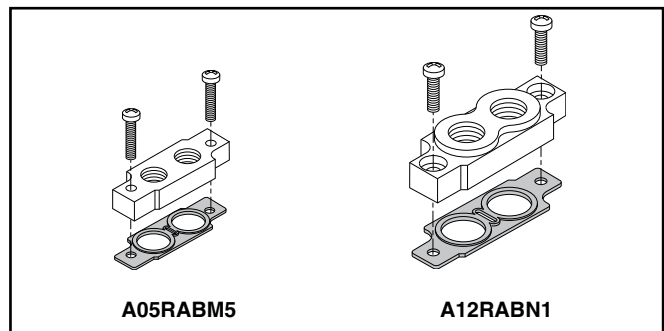

Base Gasket Kits

Size	Type	Gasket Only	Screw
A00	Subbase	A00SG	A00SS
A05	Body Ported	A05RG	A05RS
	Subbase Int.	A05PG	A05PS
	Subbase Ext.	A05PXG	A05PS
A12	Body Ported	A12RG	A12RS
	Subbase Int.	A12PG	A12PS
	Subbase Ext.	A12PXG	A12PS

These are spare parts, mounting screws and gaskets included with valves.

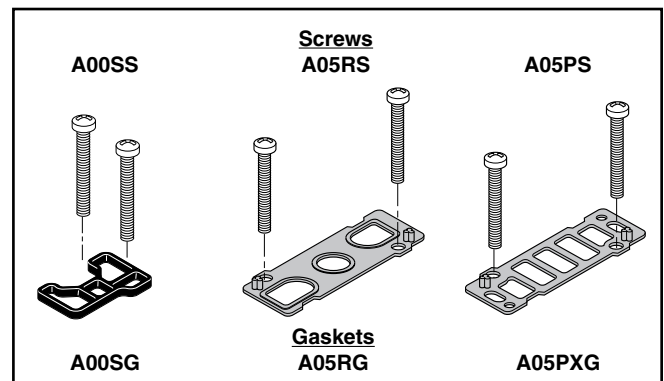

D

Viking
Lite

Viking
Xtreme

B

ADEX

N

Flow Rating (Cv)

Size	Port Size	Mounting Style	ANSI / (NFPA)		JIS Method	
			2-Position	3-Position	2-Position	3-Position
A00	M3	Subbase	.010	—	—	—
	M5	Subbase	.017	—	—	—
A00****J	M5	Subbase	.020	—	—	—
A05	M5	Inline	.18	.16	.22	.20
	M5	Subbase	.17	.16	.32	.32
A12	1/8" Ports	Inline	.47	.43	.48	.46
	1/8" Ports	Subbase	.44	.40	.61	.42

ANSI / (NFPA) T3.21.3-1990 standard for Cv measurement.

Response Time

Valve Size	Port Size	0 Cu. In. Test Chamber	
		Fill	Exhaust
2-Position Single Solenoid / Air Return			
A00	M3	.004	.006
A05	M5	.014	.025
A12	1/8"	.016	.030
2-Position Double Solenoid			
A00	M3	—	—
A05	M5	.011	.015
A12	1/8"	.010	.012
3-Position Double Solenoid			
A00	M3	—	—
A05	M5	.013	.017
A12	1/8"	.013	.014

Average Fill Time (Seconds): With 100 PSIG supply, time required to fill from 0-90 PSIG and exhaust from 100 PSIG to 10 PSIG is measured from instant of energizing, or de-energizing 24VDC solenoid. Times shown are average.

Tested per ANSI / (NFPA) T3.21.8.

Temperature Rating

Intermittent Duty (AC & DC Voltage):

32°F to 122°F (0°C to 50°C)
 Voltage Rated +10 / -10%

Continuous Duty (DC Voltage Only):

32°F to 104°F (0°C to 40°C)
 Voltage Rated +0 / -10%

Operating Pressure

Maximum: 4-Way: 100 PSIG (690 kPa)
3-Way: 100 PSIG (690 kPa) NC*
 70 PSIG (483 kPa) NO*

Minimum:

Description	Internal Pilot		External Pilot		
	PSIG	kPa	PSIG	kPa	
4-Way	Single Solenoid	22	152	Vacuum	
				36	248
	Double Solenoid – 2-Position	15	104	Vacuum	
3-Way	A00 Series	30	207	Vacuum	
				36	248


* When using vacuum and pressure on ports 1 & 3 – 85 PSIG (586 kPa) NC; 58 PSIG (400 kPa) NO (see page D112).

Solenoid Information

Power Consumption	Standard		
			With Indicator Light & Surge Suppressor
	DC	W	0.6
	AC	100V VA	1.2
	110V VA	1.4	
High Flow			With Indicator Light & Surge Suppressor
	DC	W	0.91
	AC	100V VA	—
		110V VA	—

A00

Subbase

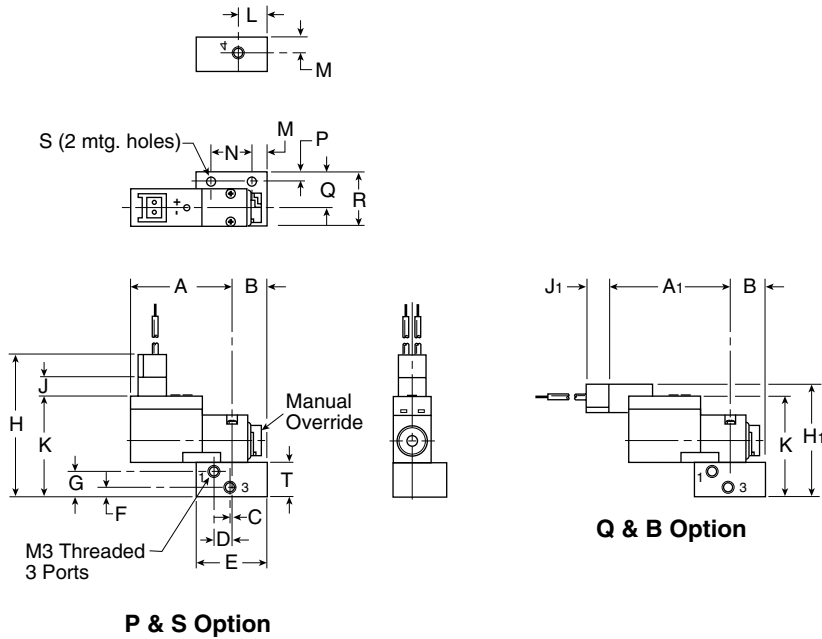

A00 - Subbase

A 1.00 (25)	A₁ 1.18 (30)	B .41 (11)	C .015 (.4)	D .17 (4)
E .79 (20)	F .12 (3)	G .28 (7)	H 1.54 (39)	H₁ 1.38 (34)
J .24 (6)	J₁ .20 (5)	K 1.11 (28)	L .32 (8)	M .18 (5)
N .47 (12)	P .10 (3)	Q .39 (10)	R .59 (15)	S .106 (2.7)
T .38 (10)				

Inches (mm)

D

Viking
Lite

Viking
Xtreme


B

ADEX

N

A00

Manifold

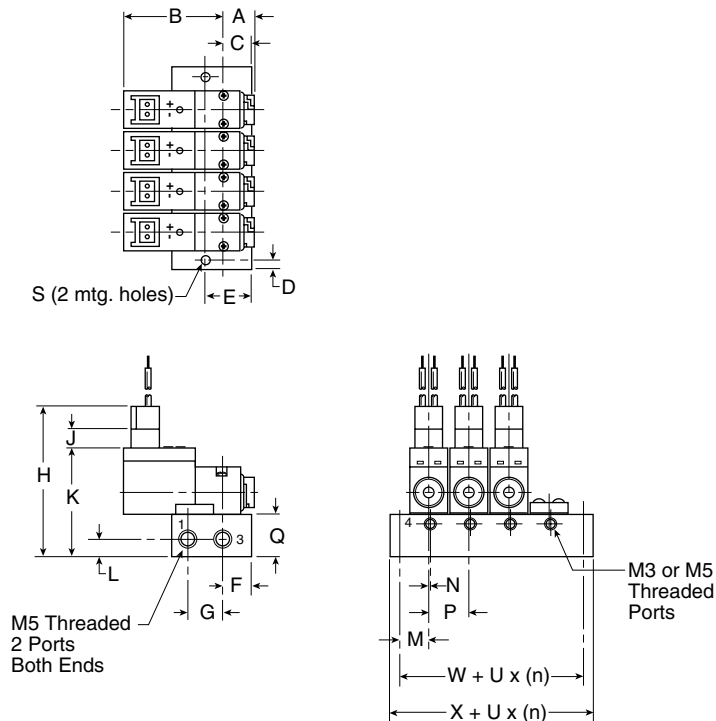

A00 - Manifold


A .36 (9)	B 1.00 (25)	C .31 (8)	D .10 (3)	E .51 (13)
F .31 (8)	G .39 (10)	H 1.63 (42)	J .20 (5)	K 1.22 (31)
L .20 (5)	M .33 (9)	N .02 (.6)	P .41 (10.5)	Q .47 (12)
S .125 (3.2)	U .41 (10.5)	X .45 (11.5)	W .26 (6.5)	

Inches (mm)

n = Number of stations.

A05

Single & Double Operators – Inline

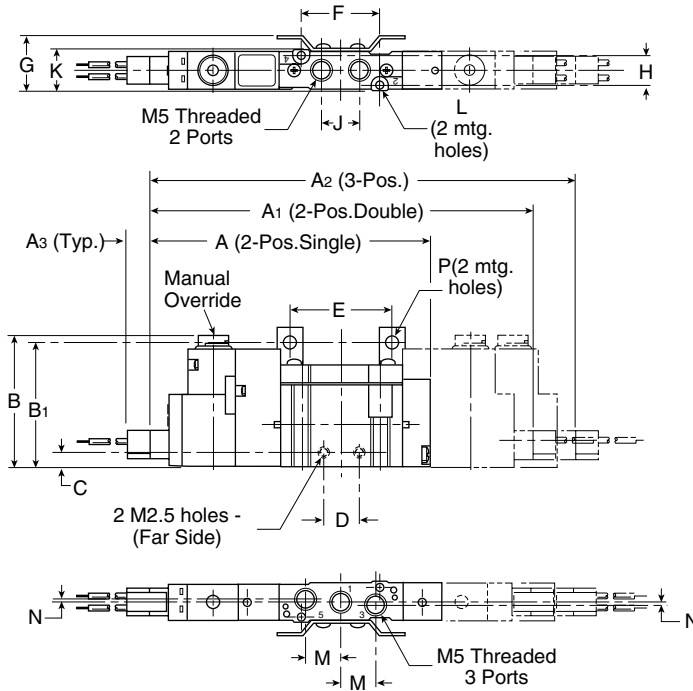

A05R – Inline

A 2.91 (74)	A₁ 3.94 (100)	A₂ 4.25 (108)	A₃ .24 (6)	B 1.38 (35)
B₁ 1.30 (33)	C .161 (4)	D .38 (10)	E 1.06 (27)	F .83 (21)
G .57 (15)	H .33 (9)	J .40 (10)	K .45 (11.4)	L Ø .08 Ø (2.1)
M .37 (10)	N .04 (1)	P Ø .14 Ø (3.5)		

Inches (mm)

D

Viking
Lite

Viking
Xtreme


B

ADEX

N

A12

Single & Double Operators – Inline

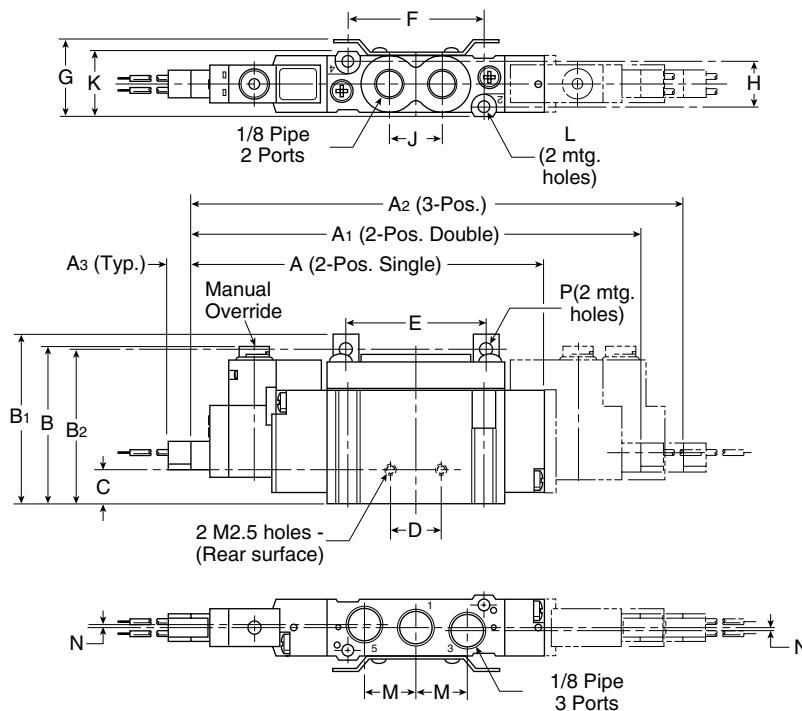


A12R – Inline

A 3.68 (94)	A₁ 4.69 (119)	A₂ 5.12 (130)	A₃ .24 (6)	B 1.64 (42)
B₁ 1.77 (45)	B₂ 1.70 (43)	C .35 (9)	D .51 (13)	E 1.46 (37)
F 1.42 (36)	G .80 (20)	H .47 (12)	J .55 (14)	K .68 (17)
L Ø .12 Ø (3.1)	M .55 (14)	N .03 (0.8)	P Ø .14 Ø (3.5)	

Inches (mm)

A05

Single & Double Operators – Subbase

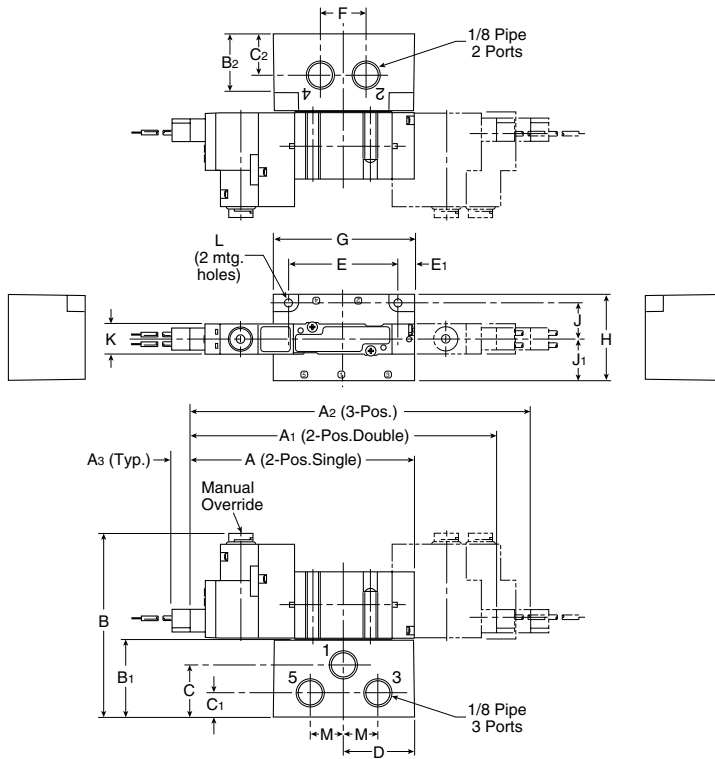

A05P – Subbase

A 2.91 (74)	A₁ 3.94 (100)	A₂ 4.25 (108)	A₃ .24 (6)	B 2.35 (60)
B₁ .96 (25)	B₂ .75 (19)	C .65 (17)	C₁ .30 (8)	C₂ .53 (14)
D .89 (23)	E 1.38 (35)	E₁ .20 (5)	F .57 (15)	G 1.77 (45)
H .08 (2)	J .45 (11.5)	J₁ .51 (13)	K .39 (10)	L Ø .13 Ø (3.2)
M .45 (12)				

Inches (mm)

D

Viking
Lite

Viking
Xtreme


B

ADEX

N

A12

Single & Double Operators – Subbase

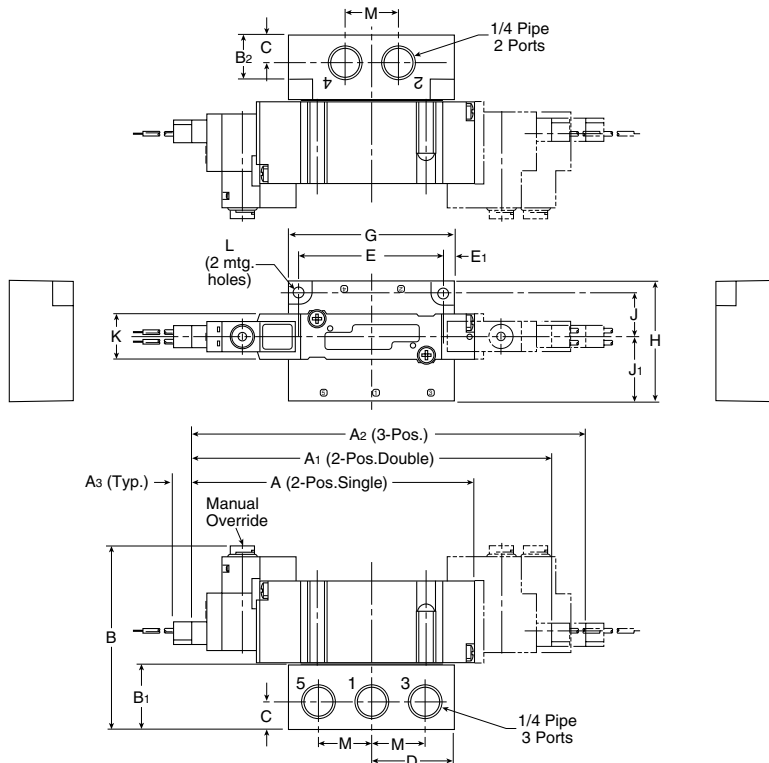





A12P – Subbase

A 3.68 (94)	A₁ 4.69 (119)	A₂ 5.12 (130)	A₃ .24 (6)	B 2.41 (61)
B₁ .87 (22)	B₂ .75 (19)	C .37 (10)	D 1.10 (28)	E 1.89 (48)
E₁ .16 (4)	G 2.20 (56)	H 1.59 (41)	J .57 (14.5)	J₁ .87 (22)
K .59 (15)	L Ø .17 Ø (4.3)	M .71 (18)		

Inches (mm)

A05

Manifold – Valve Inline

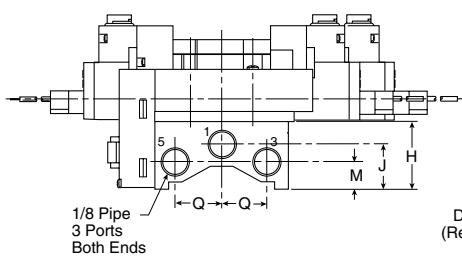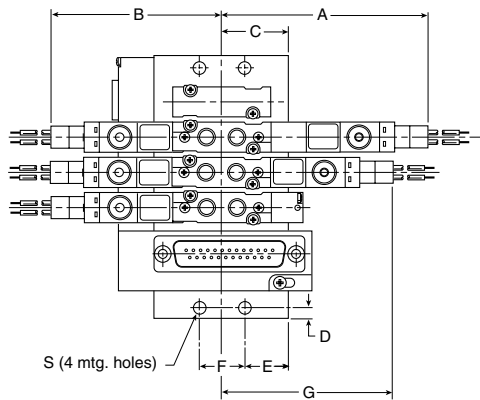

A05R - Manifold, Valve Inline





A 2.52 (64)	B 2.21 (56)	C .94 (24)	D .16 (4)	E .61 (16)	F .63 (16)
G 2.21 (56)	H .94 (24)	J .61 (16)	M .37 (10)	Q .63 (16)	S Ø .18 Ø (4.5)
T 1.34 (34)	T₁ .51 (13)	U .49 (12.5)	U₁ .41 (10.5)	V 2.32 (59)	W 1.36 (35)
W₁ .37 (9.5)	X 167 (43)	X₁ .68 (17.5)			

Inches (mm)

n = Number of stations.

A12

Manifold – Valve Inline

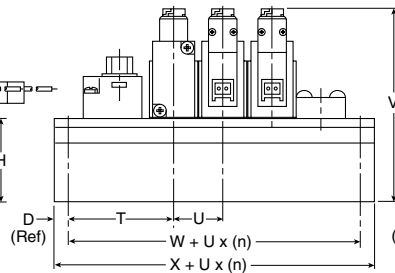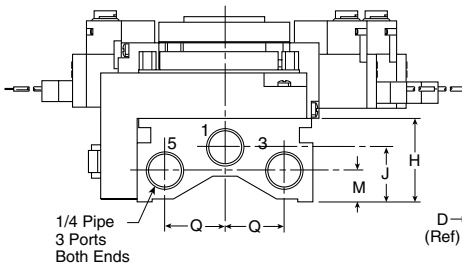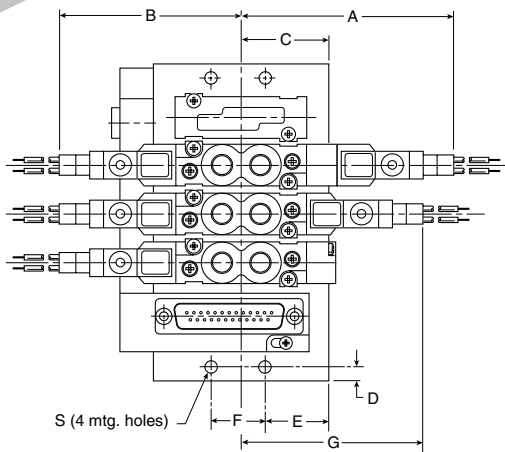

A12R - Manifold, Valve Inline

A 3.01 (77)	B 2.58 (66)	C 1.14 (29)	D .20 (5)	E .76 (19)	F .77 (19.6)
G 2.58 (66)	H 1.08 (28)	J .71 (18)	M .41 (11)	Q .77 (20)	S Ø .18 Ø (4.5)
T 1.48 (38)	T₁ .51 (13)	U .69 (17.5)	U₁ .63 (16)	V 2.74 (70)	W 1.34 (34)
W₁ .39 (10)	X 1.73 (44)	X₁ .79 (20)			

Inches (mm)




n = Number of stations.



A05

Manifold – Side Ports

A05P – Manifold, Side Ports

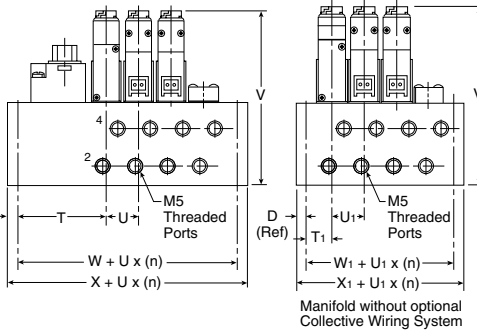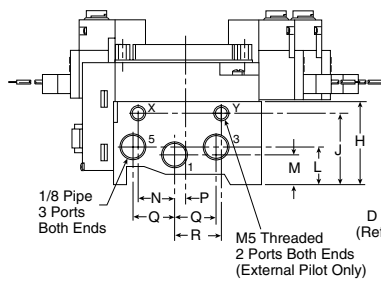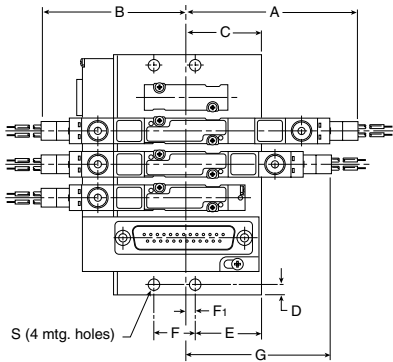

A	B	C	D	E	F
2.52 (64)	2.21 (56)	1.12 (29)	.16 (4)	1.00 (26)	.63 (16)
F ₁	G	H	J	L	M
.19 (5)	2.21 (56)	1.26 (32)	1.08 (28)	.59 (15)	.45 (11.5)
N	P	Q	R	S	T
.55 (14)	.13 (3)	.63 (16)	.71 (18)	Ø .18 (4.5)	1.34 (34)
T ₁	U	U ₁	V	W	W ₁
.39 (10)	.49 (12.5)	.41 (10.5)	2.64 (67)	1.32 (34)	.37 (10)
X	X ₁				
1.65 (42)	.67 (18)				




Inches (mm)

n = Number of stations.

A12

Manifold – Side Ports

A12P – Manifold, Side Ports

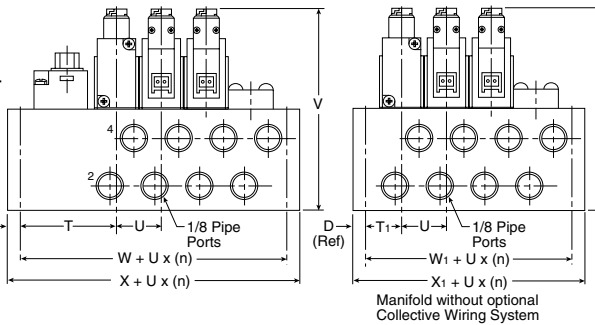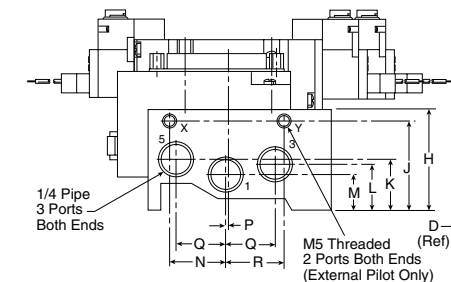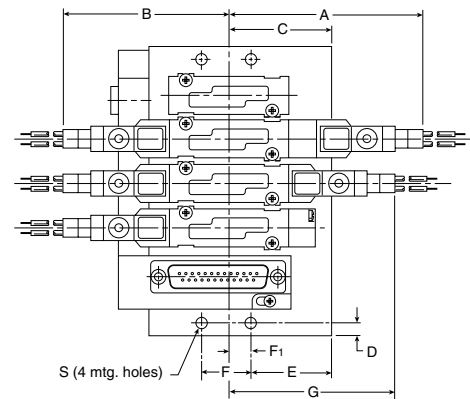

A	B	C	D	E	F
3.01 (77)	2.58 (66)	1.59 (40)	.20 (5)	1.25 (32)	.77 (20)
F	G	H	J	K	L
.34 (9)	2.58 (66)	1.57 (40)	1.38 (35)	.79 (20)	.71 (18)
M	N	P	Q	R	S
.55 (14)	.87 (22)	.04 (1)	.77 (20)	.91 (23)	Ø .18 (4.5)
T	T ₁	U	V	W	W ₁
1.48 (38)	.59 (13)	.69 (17.5)	3.09 (79)	1.34 (34)	.33 (9)
X	X ₁				
1.73 (44)	.73 (19)				

Inches (mm)

n = Number of stations.

D

Viking
Lite

Viking
Xtreme

B

ADEX

N



"N" Series

High Speed
Inline Poppet Valves
2 & 3-Way

Section D
www.parker.com/pneu/n



D

Viking
Lite

Viking
Xtreme

B

ADEX


N

Basic Valve Functions	D108	Solenoid & Parts Lists	D118-D120
"N" Series Basic Features	D109	Coil Information	D121
Common Part Numbers.....	D110-D111	Dimensions	
Model Number Index	D112-D113	Single Solenoid	D122-D125
Technical Information		Remote Operated.....	D126-D127
Pilot Supply	D114-D115		
Electrical Connections	D116		
Solenoid Characteristics	D117		

BOLD ITEMS ARE MOST POPULAR.



**Single Solenoid
 3-Way, 2-Position
 NC (NNP)**




Normal position – Pressure at inlet port marked “IN” blocked. Cylinder port connected to exhaust port (3-Way).

Energized position – Solenoid operator energized, pressurized “IN” port connects to cylinder port. Exhaust port is blocked (3-Way).

CAUTION:
 These are poppet valves, **Do Not** restrict the inlet.
Note: For 2-Way, Normally Closed, Exhaust Port is Plugged.

**Single Solenoid
 3-Way, 2-Position
 NO (NP)**




Normal position – Pressure at inlet port marked “IN” open to cylinder. Exhaust port is blocked (3-Way).

Energized position – Solenoid operator energized. Pressure at inlet port marked “IN” is blocked. Cylinder open to exhaust (3-Way).

CAUTION:
 These are poppet valves, **Do Not** restrict the inlet.
Note: For 2-Way, Normally Open, Exhaust Port is Plugged.

**Single Remote Pilot
 3-Way, 2-Position,
 NC (NNP)**




Normal position – Pressure at inlet port marked “IN” blocked. Cylinder port connected to exhaust port (3-Way).

Operated position – With maintained air signal at pilot port, pressurized “IN” port connects to cylinder port. Exhaust port is blocked (3-Way).

CAUTION:
 These are poppet valves, **Do Not** restrict the inlet.
Note: For 2-Way, Normally Closed, Exhaust Port is Plugged.

**Single Remote Pilot
 3-Way, 2-Position,
 NO (NP)**



Normal position – Pressure at inlet port marked “IN” open to cylinder. Exhaust port is blocked (3-Way).

Operated position – With maintained air signal at pilot port, pressure at inlet port marked “IN” is blocked. Cylinder open to exhaust (3-Way).

CAUTION:
 These are poppet valves, **Do Not** restrict the inlet.
Note: For 2-Way, Normally Open, Exhaust Port is Plugged.

D	Viking Lite
	Viking Xtreme
B	
ADEX	
N	

**For Information on Options that are no longer available
 and the Suggested Cross Reference or Kit Info, refer to
www.parker.com/pneumatic/classicvalves
 & Catalog N Series-E/USA**

"N" Series

Specifications

- 2-Way NC
- 3-Way NO & NC
- Selector Function

Flow

- 3/8" Body – 3.0 to 4.4 Cv
- 3/4" Body – 9.0 to 11.0 Cv
- 1-1/4" Body – 20.0 to 30.0 Cv

Port Sizes

- 3/8" Body – 3/8", 1/2" NPT
- 3/4" Body – 1/2", 3/4", 1" NPT
- 1-1/4" Body – 1", 1-1/4", 1-1/2" NPT
- BSPG "G" Threads Available

Operating Pressure


- 30 to 250 PSI (0 to 1000 kPa)
- Vacuum with External Pilot

Features


- Continuous Duty Rated Option
- Non-Lube Service
- Hi-Flow, Short Stroke Poppet
- Indicator Lights Available

Certification / Approval


- Approved to be CE Marked (Standard L-Pilot & P-Pilot)
- NEMA 4 Option
- Hazardous Duty Option

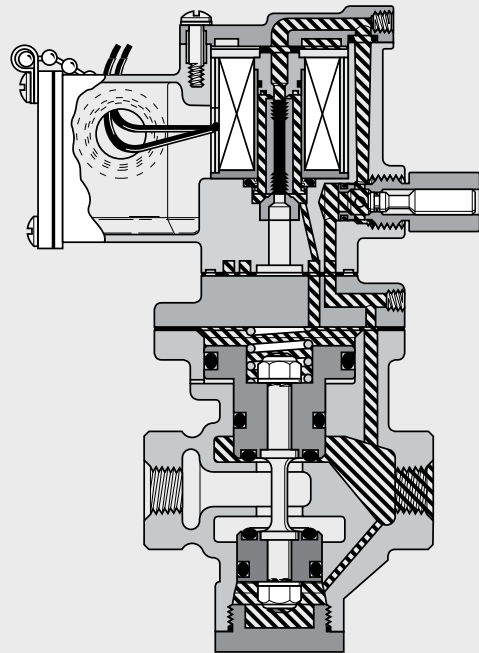

3/8" Solenoid Pilot De-Energized
Normally Closed

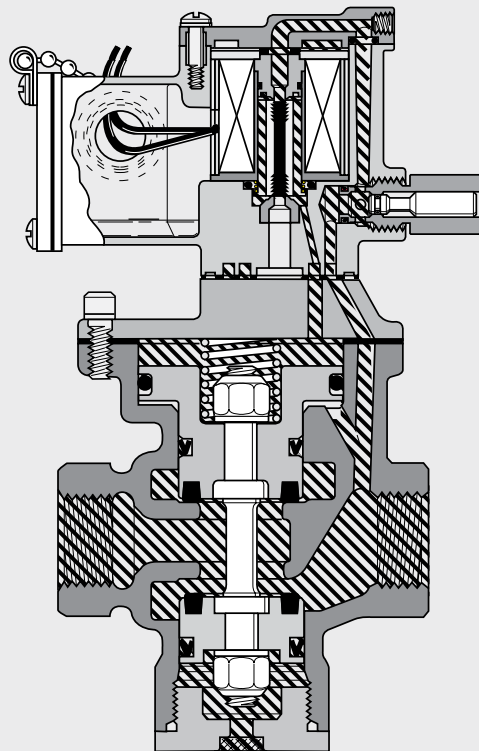

1-1/4" Solenoid Pilot De-Energized
Normally Open

 Pressure  Exhaust

D

Viking
Lite

Viking
Xtreme

B

ADEX

N

**Single Solenoid
Normally Closed**

2-Way, 2-Position
3-Way, 2-Position



**Single Solenoid
Normally Open**

3-Way, 2-Position



3/8" & 3/4" Body Size

	2-Way Normally Closed	3-Way Normally Closed	In/Cyl Ports	Exh. Port
3/8"	N3153904553	N3553904553	3/8"	1/2"
	N3154904553	N3554904553	1/2"	1/2"
3/4"	N3155904553	N3555904553	1/2"	3/4"
	N3156904553	N3556904553	3/4"	1"
	N3157904553	N3557904553	1"	1"

Locking Manual Override, Internal "P" Pilot 140 PSI, Standard Service, Junction Box w/ Light, 120VAC.

3/8" & 3/4" Body Size

	3-Way Normally Open	In/Cyl Ports	Exh Port
3/8"	N3753904553	3/8"	1/2"
	N3754904553	1/2"	1/2"
3/4"	N3755904553	1/2"	3/4"
	N3756904553	3/4"	1"
	N3757904553	1"	1"

Locking Manual Override, Internal "P" Pilot 140 PSI, Standard Service, Junction Box w/ Light, 120VAC.



1-1/4" Body Size

	2-Way Normally Closed	3-Way Normally Closed	In/Cyl Ports	Exh. Port
1-1/4"	N3257904753	N3657904753	1"	1-1/4"
	N3258904753	N3658904753	1-1/4"	1-1/2"
	N3259904753	N3659904753	1-1/2"	1-1/2"

Locking Manual Override, Internal "P" Pilot 125 PSI, Standard Service, P-Pilot Junction Box w/ Light, 120VAC.

1-1/4" Body Size

	3-Way Normally Open	In/Cyl Ports	Exh. Port
1-1/4"	N3857904753	1"	1-1/4"
	N3858904753	1-1/4"	1-1/2"
	N3859904753	1-1/2"	1-1/2"

Locking Manual Override, Internal "P" Pilot 125 PSI, Standard Service, P-Pilot Junction Box w/ Light, 120VAC.

D

Viking
Lite

Viking
Xtreme

B

ADEX

N

**Single Remote Pilot
Normally Closed**

2-Way, 2-Position

3-Way, 2-Position



3/8" & 3/4" Body Size

	2-Way Normally Closed	3-Way Normally Closed	In/Cyl Ports	Exh. Port
3/8"	N31431091	N35431091	3/8"	1/2"
	N31441091	N35441091	1/2"	1/2"
3/4"	N31451091	N35451091	1/2"	3/4"
	N31461091	N35461091	3/4"	1"
	N31471091	N35471091	1"	1"

1/4" NPT Remote Pilot Port with Internal Pilot Return.

**Single Remote Pilot
Normally Open**

3-Way, 2-Position



3/8" & 3/4" Body Size

	3-Way Normally Open	In/Cyl Ports	Exh. Port
3/8"	N37431091	3/8"	1/2"
	N37441091	1/2"	1/2"
3/4"	N37451091	1/2"	3/4"
	N37461091	3/4"	1"
	N37471091	1"	1"

1/4" NPT Remote Pilot Port with Internal Pilot Return.



1-1/4" Body Size

	2-Way Normally Closed	3-Way Normally Closed	In/Cyl Ports	Exh. Port
1-1/4"	N32471091	N36471091	1"	1-1/4"
	N32481091	N36481091	1-1/4"	1-1/2"
	N32491091	N36491091	1-1/2"	1-1/2"

1/4" NPT Remote Pilot Port with Internal Pilot Return.



1-1/4" Body Size

	3-Way Normally Open	In/Cyl Ports	Exh. Port
1-1/4"	N38471091	1"	1-1/4"
	N38481091	1-1/4"	1-1/2"
	N38491091	1-1/2"	1-1/2"

1/4" NPT Remote Pilot Port with Internal Pilot Return.

D

Viking
Lite

Viking
Xtreme

B

ADEX

N

"N" Series 3/8", 3/4" & 1-1/4" Body Sizes - Solenoid 'L' Pilot

N 315 3 9 0 45 53 —

Valve Function - Solenoid	
3/8" & 3/4" Body	
2-Way, Normally Closed	315
3-Way, Normally Closed	355
3-Way, Normally Open	375
1-1/4" Body	
2-Way, Normally Closed	325
3-Way, Normally Closed	365
3-Way, Normally Open	385

Options	
Blank	None
L	72" Leads - '51' Voltage Code Only
C	Chrysler Wiring - Enclosure 'J' & 'N'
F	Ford Wiring - Enclosure 'E', 'J', & 'N'
G	GM wiring - Enclosure 'J' & 'N'

Port Size / Thread Type	
3/8" Body Size	
3/8" Inlet & Cyl - 1/2" Exhaust - NPT	3
1/2" Inlet & Cyl - 1/2" Exhaust - NPT	4
1/2" Inlet & Cyl - 1/2" Exhaust - BSPP	N
3/4" Body Size	
1/2" Inlet & Cyl - 3/4" Exhaust - NPT	5
3/4" Inlet & Cyl - 1" Exhaust - NPT	6
3/4" Inlet & Cyl - 1" Exhaust - BSPP	Q
1" Inlet & Cyl - 1" Exhaust - NPT	7
1-1/4" Body Size	
1" Inlet & Cyl - 1 1/4" Exhaust - NPT	7
1-1/4" Inlet & Cyl - 1-1/2" Exhaust - NPT	8
1-1/4" Inlet & Cyl - 1-1/2" Exhaust - BSPP	S*
1-1/2" Inlet & Cyl - 1-1/2" Exhaust - NPT	9
1-1/2" Inlet & Cyl - 1-1/2" Exhaust - BSPP	T*

* Not available with Valve Function 325.
Note: BSPP is to the ISO 228 Standard, and requires an R-BSPT male fitting.

Solenoid Enclosure	
Basic Pilot	1
Basic Pilot NLMO	2
Basic Pilot LMO	3
Junction Box NLMO	5
Junction Box LMO	6
Junction Box NLMO w/ Light	8
Junction Box LMO w/ Light	9
Basic Pilot Ext. LMO	W
JIC NLMO w/Light - 3-Pin Automotive	E
JIC NLMO w/ Light - 4-Pin M12	J
JIC NLMO w/ Light - 5-Pin Automotive	N

"L" Pilot Code						
Code	Voltage			Solenoid Enclosure Options		
	AC 60hz	AC 50hz	DC	Standard Duty (01, 45)	Cont. Duty (04, 48)	200 PSI (46)
42	24	24	6	5, 6	6	
45			12	1, 5, 6		
49			24	1, 2, 3, 5, 6, 8, 9, W	6, 8, 9	9
51			48	1		
53	120	110		1, 2, 3, 5, 6, 8, 9, E, N, W	1, 6, 8, 9, N	8, 9, E
57	240	220		1, 3, W		
61			120	5, 6		
79			24	E, J	E, J	E, J

"L" Pilot Configuration	
01*	External Pilot, Std Service, 140 PSI
04*	External Pilot, Cont Duty, 140 PSI
45	Internal Pilot, Std Service, 140 PSI
46	Internal Pilot, Std Service, 200 PSI
48	Internal Pilot, Cont Duty, 140 PSI

* Not available with Valve Function 325, 365, and 385 (1-1/4" Body).

Solenoid Type	
0	Standard
5*	Hazardous Duty
8*	NEMA 4 Solenoid

* Available with Solenoid Enclosure 2 & 3, 'L' Pilot Configuration 04 & 48, and Voltage 49 & 53 ONLY.

BOLD OPTIONS ARE MOST POPULAR.



D
 Viking
 Lite
 Viking
 Xtreme
 B
 ADEX
 N

"N" Series 1-1/4" Body Sizes - Solenoid Hi-Flow 'P' Pilot

N 365 8 9 0 47 53

Valve Function - Solenoid	
1-1/4" Body	
2-Way, Normally Closed	325
3-Way, Normally Closed	365
3-Way, Normally Open	385

Port Size / Thread Type	
1-1/4" Body Size	
1" Inlet & Cyl - 1 1/4" Exhaust - NPT	7
1-1/4" Inlet & Cyl - 1-1/2" Exhaust - NPT	8
1-1/4" Inlet & Cyl - 1-1/2" Exhaust - BSPP	S
1-1/2" Inlet & Cyl - 1-1/2" Exhaust - NPT	9
1-1/2" Inlet & Cyl - 1-1/2" Exhaust - BSPP	T

Note: BSPP is to the ISO 228 Standard, and requires an R-BSPT male fitting.

Solenoid Enclosure	
Junction Box NLMO	5
Junction Box LMO	6
Junction Box NLMO w/ Light	8
Junction Box LMO w/ Light	9

"P" Pilot Code				
Code	Voltage			Enclosure Options
	AC 60hz	AC 50hz	DC	
49			24	5, 6
53	120	110		5, 6, 8, 9

"P" Pilot Configuration	
02	External Pilot, Std Service, 125 PSI
47	Internal Pilot, Std Service, 125 PSI

Solenoid Type	
0	Standard

"N" Series 3/8", 3/4" & 1-1/4" Body Sizes - Remote Pilot

N 314 3 0 91

Valve Function - Solenoid	
3/8" & 3/4" Body	
2-Way, Normally Closed	314
3-Way, Normally Closed	354
3-Way, Normally Open	374
1-1/4" Body	
2-Way, Normally Closed	324
3-Way, Normally Closed	364
3-Way, Normally Open	384

Port Size / Thread Type	
3/8" Body Size	
3/8" Inlet & Cyl - 1/2" Exhaust - NPT	3
1/2" Inlet & Cyl - 1/2" Exhaust - NPT	4
1/2" Inlet & Cyl - 1/2" Exhaust - BSPP	N
3/4" Body Size	
1/2" Inlet & Cyl - 3/4" Exhaust - NPT	5
1/2" Inlet & Cyl - 3/4" Exhaust - BSPP	P
3/4" Inlet & Cyl - 1" Exhaust - NPT	6
3/4" Inlet & Cyl - 1" Exhaust - BSPP	Q
1" Inlet & Cyl - 1" Exhaust - NPT	7
1-1/4" Body Size	
1" Inlet & Cyl - 1 1/4" Exhaust - NPT	7
1-1/4" Inlet & Cyl - 1-1/2" Exhaust - NPT	8
1-1/4" Inlet & Cyl - 1-1/2" Exhaust - BSPP	S*
1-1/2" Inlet & Cyl - 1-1/2" Exhaust - NPT	9
1-1/2" Inlet & Cyl - 1-1/2" Exhaust - BSPP	T*

Pilot Configuration	
089	External Pilot Return
091	Internal Pilot Return

* Not available with Valve Function 325.

Note: BSPP is to the ISO 228 Standard, and requires an R-BSPT male fitting.

BOLD OPTIONS ARE MOST POPULAR.



Operating Pressure

Internal Pilot – Solenoid Valves 3/8" & 3/4" Body

- 20 to 140 PSIG (standard)

1-1/4" Body

- 25 to 140 PSIG (200 PSIG option available)

Internal Pilot – Remote Pilot Valve

Operating Pressure Limitations			
Air Pressure Thru Valve	Remote Pilot Pressure (PSI)		
	3/8" Basic	3/4" Basic	1-1/4" Basic
25 PSI	30-250	30-250	30-250
50 PSI	50-250	50-250	50-250
75 PSI	70-250	75-250	70-250
100 PSI	95-250	95-250	90-250
150 PSI	140-250	145-250	130-250
200 PSI	175-250	185-250	175-250
250 PSI	215-250	230-250	205-250

Solenoid Valves: External Supply

3/8" & 3/4" Basic

Air Pressure Thru Valve (PSI)	External Pilot Pressure Required (PSI)*	
	3/8" Basic	3/4" Basic
25 PSI	35-200	35-200
50 PSI	45-200	40-200
75 PSI	55-200	50-200
100 PSI	65-200	65-200

Vacuum up to 1" HG, less than a perfect vacuum.

* With 200 PSI option.

Do not exceed 140 PSI with standard pilots.

D

Viking
Lite

Viking
Xtreme

B

ADEX

N



3/8" & 3/4" Body
**Single Solenoid External Pilot
Normally Closed**



3/8" & 3/4" Body
**Single Solenoid External Pilot
Normally Open**



3/8" & 3/4" Body
**Remote Operated External Return
Normally Closed**



1-1/4" Body



3/8" & 3/4" Body



1-1/4" Body

**Remote Operated External Return
Normally Open**

External Pilot supply should be used when the main valve needs to operate below the Minimum Operating Pressure or at Vacuum. A Selector function can also be achieved (pressurizing the IN and EXHAUST ports) with an External Pilot Supply. Refer to charts for required external pilot pressure.

Flow

Basic Valve Size	Inlet Port Size	Exhaust Port Size	Cv Inlet to Cylinder	Cv Cylinder to Exhaust
3/8" 3-Way Normally Closed	3/8" Pipe	1/2" Pipe	3.6	4.2
	1/2" Pipe	1/2" Pipe	3.8	4.3
3/8" 3-Way Normally Open	3/8" Pipe	1/2" Pipe	3.6	4.1
	1/2" Pipe	1/2" Pipe	3.9	4.5
3/4" 3-Way Normally Closed	1/2" Pipe	3/4" Pipe	8.2	9.2
	3/4" Pipe	1" Pipe	9.3	10.8
3/4" 3-Way Normally Open	1/2" Pipe	3/4" Pipe	7.7	6.6
	3/4" Pipe	1" Pipe	9.6	11.4
1-1/4" 3-Way Normally Closed	1" Pipe	1-1/4" Pipe	19.5	23.5
	1-1/4" Pipe	1-1/2" Pipe	23.3	26.9
	1-1/2" Pipe	1-1/2" Pipe	23.3	26.9
1-1/4" 3-Way Normally Open	1" Pipe	1-1/4" Pipe	20.4	24.8
	1-1/4" Pipe	1-1/2" Pipe	25.0	29.1
	1-1/2" Pipe	1-1/2" Pipe	26.7	29.9

Temperature Rating

Operating Temperature Range:

Operator Type	Duty Cycle*	Minimum Ambient Temperature	Maximum Ambient Temperature
Standard Service	Intermittent	0°F (-18°C)	125°F (52°C)
Solenoid	Continuous	0°F (-18°C)	100°F (38°C)
Special Service	Intermittent	0°F (-18°C)	125°F (52°C)
Solenoid	Continuous	0°F (-18°C)	125°F (52°C)
Remote Pilot	Not Applicable	0°F (-18°C)	200°F (93°C)

* Applications with pilot valves energized for ten (10) minutes or longer with a duty cycle greater than 70% are considered to be continuously energized.

$$\text{Duty cycle} = \frac{\text{Time energized}}{\text{Time energized} + \text{time off}} \times 100\% = \% \text{ Duty Cycle}$$

Materials of Construction

- Valve BodyCast Aluminum
- Poppet Assembly..... Aluminum and Stainless Steel
- Pilot Valve.....Zinc, Stainless Steel, Brass, Copper, Zinc Plated Steel
- SealsNitrile

Selection

Although reasonable safety factors are designed into each speed poppet valve, it is important that application requirements do not exceed the rated limitation of the valve. This precaution insures a sufficient safety factor.

Life Expectancy

Normal multimillion cycle life expectancy of high speed poppet series valves is based on the use of properly filtered and lubricated air at room temperature. In actual laboratory tests, the high speed poppet valves provide maintenance-free service life in excess of 20,000,000 cycles.

Lubrication

The high speed poppet valves are pre-lubricated to permit use with non-lubricated air. However, air should be lubricated to assure maximum seal life.

F442 lubricating oil is recommended. This oil is specially formulated to provide peak performance and maximum service life from air-operated equipment.

Other good air line lubricating oils may be used provided they atomize readily and are of the medium aniline type. Aniline point range must be between 180°F - 220°F. Viscosity SUS @ 100°F of 140-170. High aniline oils will shrink seals; low aniline oils will swell seals, reducing operating life and expectancy.

Installation

Valves should be installed with reasonable accessibility for service whenever possible. Care should be taken to hold piping length to a minimum and to protect valves from exposure to extreme heat, dirt and moisture. Piping should be clean and clear of dirt and chips. Threads should be the correct size and undamaged. Pipe joint compound should be used sparingly and only on pipe threads, never in the valve body. Care should be taken in installation to avoid undue strain on valve.

For the small port size options, it is recommended that an air reservoir is located close to the valve inlet as to not starve the valve of air pressure.

⚠ CAUTION: DO NOT RESTRICT THE INLET TO POPPET VALVES

Restriction of the inlet can starve the air supply to the pilot section of internally piloted poppet valves and result in slow shifting or failure of the valve to shift properly. Always connect the supply line directly to the inlet of the valve using the full pipe size of the valve inlet. Never use a quick coupling to connect a poppet valve to the air supply. On valves with a small inlet port, use of an upstream surge tank may be required at lower operating pressures to insure an adequate air supply and proper operation.

D


Viking Lite

Viking Xtreme

B

ADEX

N

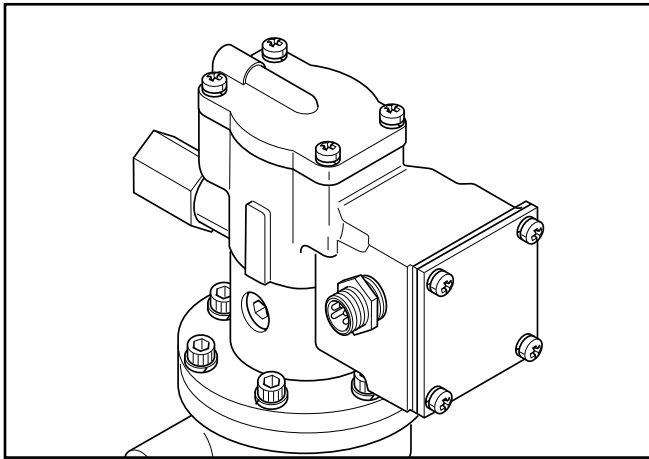

Automotive Connections

- 3-Pin & 5-Pin "Mini" (7/8 UNF Thread)
- 4-Pin "Micro" (M12 Thread)


Solenoid Configurations

"E", "J", "N"


Wiring Connections

Chrysler Connection

4-Pin Male/Single Solenoid
 (Encl. Option J, Wiring Option C)




5-Pin Male/Single Solenoid
 (Encl. Option N, Wiring Option C)




Ford Connection


3-Pin Male/Single Solenoid
 (Encl. Option E, Wiring Option F)



4-Pin Male/Single Solenoid
 (Encl. Option J, Wiring Option F)




5-Pin Male/Single Solenoid
 (Encl. Option N, Wiring Option F)




GM Connection

4-Pin Male/Single Solenoid
 (Encl. Option J, Wiring Option G)



5-Pin Male/Single Solenoid
 (Encl. Option N, Wiring Option G)



D

Viking
Life

Viking
Xtreme

B

ADEX

N

Solenoid Characteristics Chart
Voltage Range +10/-15% of Nominal

3/8" & 3/4" Basic – L-Pilot					
Voltage/ Cycles	Amps Inrush	Amps Holding	Resistance Ohms	Watts	Insulation Class
120/60VAC	.29	.18	122	12	B
110/50VAC	.21	.14	122	12	B
240/60VAC	.18	.12	610	12	B
24/60VAC	1.6	1.0	4.5	9.5	B
24/50VAC	1.2	.75	6.4	9.5	B
6VDC	–	1.4	4.5	7.6	B
12VDC	–	.66	17.7	9	B
24VDC	–	.32	71	9	B
48VDC	–	.22	216	11	B

1-1/4" Basic – P-Pilot					
Voltage/ Cycles	Amps Inrush	Amps Holding	Resistance Ohms	Watts	Insulation Class
120/60VAC	.46	.25	35	18.5	B
110/50VAC	.36	.19	48	12	B
230/60VAC	.26	.15	125	19.5	B
220/50VAC	.20	.11	191	15	B
24/60VAC	2.3	1.4	1.3	20	B
24/50VAC	1.6	.9	2.1	12	B
12VDC	–	.7	17	8	B
24VDC	–	.33	68	8	B
48VDC	–	.16	275	7.5	B

NOTE:Continuous duty type service is for applications where pilot valve is energized more than ten (10) minutes.

Hazardous Duty Solenoid Listing

Valves with solenoid operators designed for hazardous locations are UL & CSA Approved as follows:

National Electric Code	Ambient Conditions	NEMA Classification
Class I Div. 1 Group C	Ethyl, Ether, Etc. Gases & Vapors	VII (7)
Class I Div. 1 Group D	Gasoline, Etc. Gases & Vapors	VII (7)
Class I Div. 2 Group B	Butadiene, Etc., Liquid, Fluid or Vapor Normally Contained, or Atmosphere Ventilated	VII (7)
Class II Div. 1 Group E	Metal Dust	IX (9)
Class II Div. 1 Group F	Coal, Coke, Carbon Black Dust	IX (9)
Class II Div. 1 Group G	Flour, Starch, Grain Dust	IX (9)


See Article 500 – Hazardous (Classified) Locations, National Electric Code.

Continuous Duty Pilots

Continuous duty pilots are designed for applications where cycling is infrequent and the pilot is to be energized for indefinite periods of time . . . hours, days or weeks. Typical uses include fail-safe or emergency shutdown circuits where the pilot is to be energized and the valve open as long as the main control is “live” in order to shut off air to equipment in the event of power failure.

The Continuous duty pilot operates satisfactorily in ambient temperatures up to 125°F, even when continuously energized and without the benefit of the cooling air which normally flows through the pilot during frequent cycling. Under certain conditions, satisfactory operation may be obtained at ambient temperatures above 125°F. **CONSULT FACTORY.**

Incorporating the performance-proven design features of the standard L-Pilot, the continuous duty pilot utilizes a bullet-shaped stem on the upper end of the plunger. This bullet-shaped stem, seating in a high-temperature rubber o-ring, provides both a bubble-tight seal and positive release.



Continuous Duty Pilot

D



Viking Lite

Viking Xtreme

B

ADEX




N

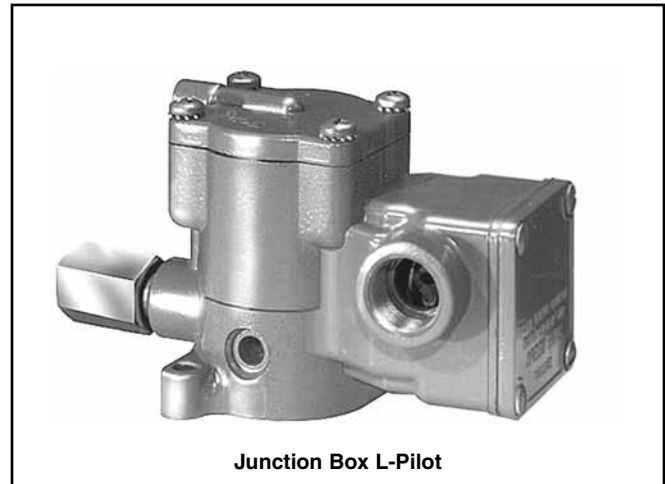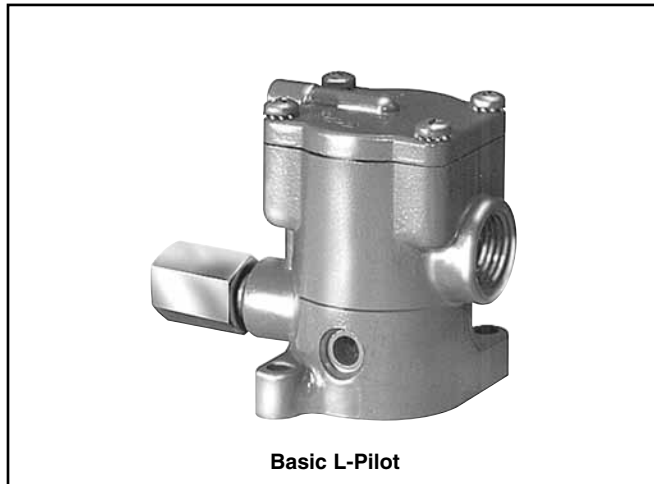


Replacement Pilots

Description	Standard L-Pilot		Continuous Duty L-Pilot	
	Locking	Non-Locking	Locking	Non-Locking
Basic with Override	K0653035**	K0652035**	K0853025**	K0852025**
JIC with Junction Box & Override	K0656035**	K0655035**	K0856025**	K0855025**
JIC Pilot with Junction Box & Override & Indicator Lights (120VAC Only)	K0659035**	K0658035**	K0859025**	K0858025**

** Voltage Code - (Reference Model Index for Availability)

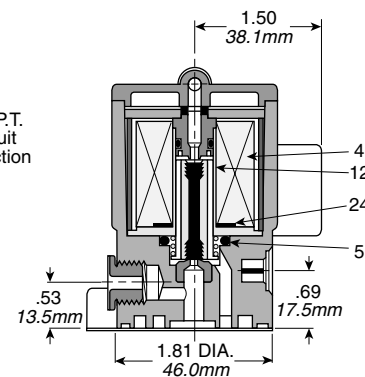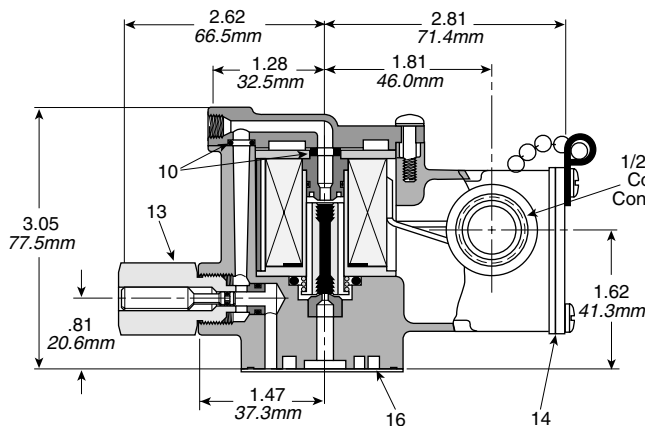

Standard Duty Pilot Only



Continuous Duty Pilot Only

Parts List

Item No.	Part Number	Description
4	K593025	Coil 120V 60Hz / 110V 50Hz
	K593035	Coil 240V 60Hz / 220V 50Hz
	K593003	Coil 6VDC / 24V 60Hz
	K593010	Coil 12VDC
	K593014	Coil 24VDC
	K593041	Coil 120VDC
5	H14213	Seal
6	K423006	Top Seat
	K423010	Top Seat (Continuous Duty)
8	K343002	Plunger (STD. Service)
	K343001	Plunger (Continuous Duty)
10*	H14201	Seal
11*	K41RB72011	O-Ring (STD. Service)
	H24969	O-Ring (Continuous Duty)

Item No.	Part Number	Description
12	K272004	Plunger Guide
13	K152003	Override Assembly
14	K183047	Cover Gasket
16*	K183001	Gasket
18*	H13473	O-Ring
20*	H13413	O-Ring
22	H19102	120 AC Only – Indicator Light
24	K183108	Gasket


Coil leads are 19" long.

* Parts included in Service Kit.


Continuous Duty Kit K352 366

Standard Service Kit K352 166

D
 Viking Lite
 Viking Xtreme
 B
 ADEX
 N

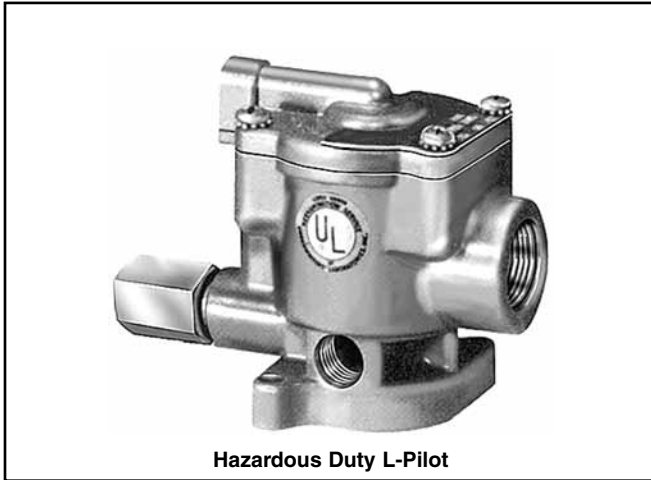

Hazardous Duty L-Pilot

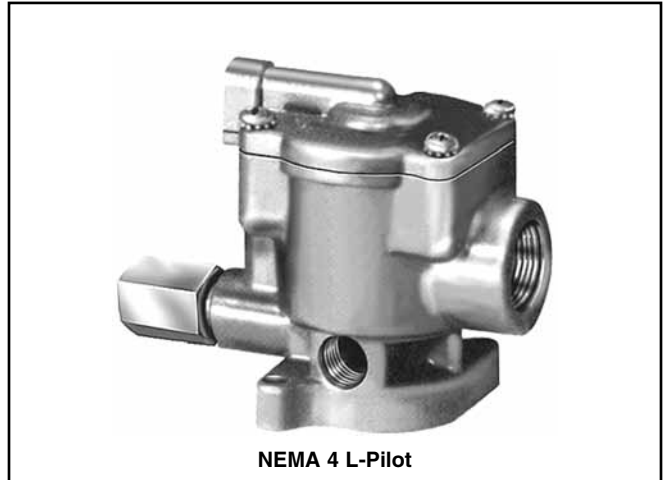


NEMA 4 L-Pilot

Replacement Pilots

Description	Continuous Duty L-Pilot	
Hazardous Duty L-Pilot - UL & CSA	K0451025**	—
Override Type	Locking	Non-Locking
Hazardous Duty with Override	K0453025**	K0452025**
NEMA 4 with Override	K2553025**	K255202549

** Voltage Code - 49 & 53

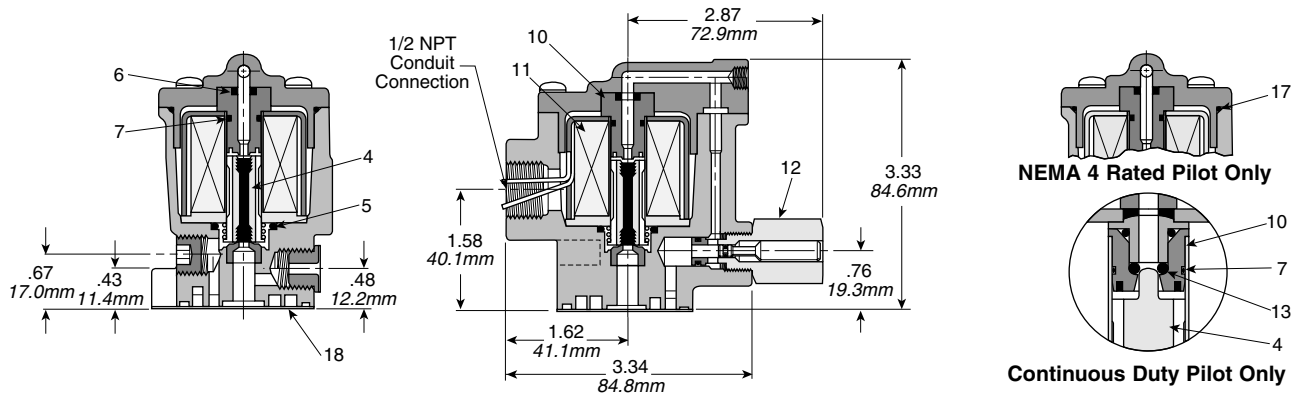

Parts List


Item No.	Part Number	Description
4*	K343002	Plunger (STD. Service)
	K343001	Plunger (Continuous Duty)
5*	K14213	Seal
6*	K41RB72009	O-Ring
	K41RB72008	O-Ring (STD. Service)
7*	K41RB72011	O-Ring (STD. Service)
	H24969	O-Ring (Continuous Duty)
10	K423001	Top Seat
	K423002	Top Seat (Continuous Duty)
11	K593025	Coil 120V 60Hz / 110V 50Hz
	K593035	Coil 240V 60Hz / 220V 50Hz
	K593003	Coil 6VDC / 24V 60Hz
	K593010	Coil 12VDC
	K593014	Coil 24VDC
	K593041	Coil 120VDC

Item No.	Part Number	Description
12	K152003	Override Assembly
13*	H13473	O-Ring
17*	H13716	Gasket (NEMA 4 Rated Pilot Only)
18*	K183001	Gasket

Coil leads are 19" long.

* Parts included in Service Kit.
 Continuous Duty Kit K352 366
 Standard Service Kit K352 166



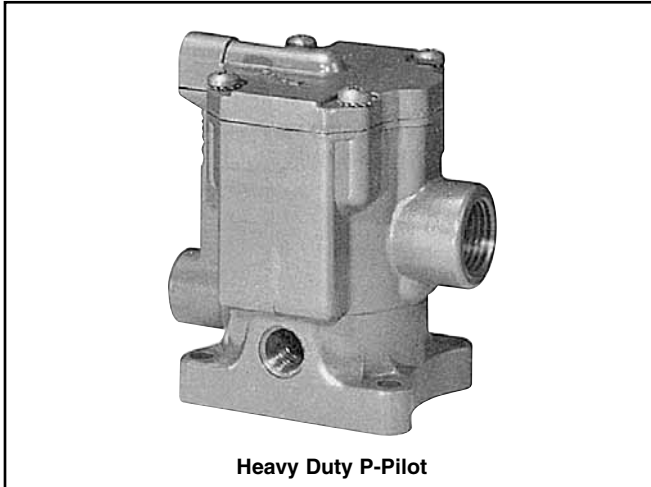


Heavy Duty P-Pilot

D

Replacement Pilots

Description	Standard P-Pilot		
	No Override	Non-Locking	Locking
Basic with Override	K1351045**	N/A	N/A
JIC with Junction Box & Override	N/A	K1355045**	K1356045**
JIC Pilot with Junction Box & Override & Indicator Lights (120VAC Only)	N/A	K135804553	K135904553

** Voltage Code - 49 & 53

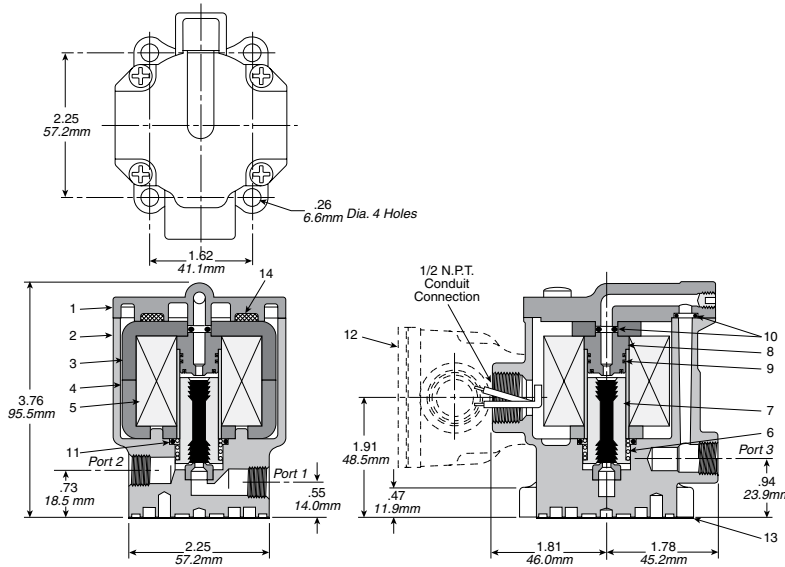

Parts List

Item No.	Part Number	Description
1	K062005	Cover Assy
2	K112045	Body, Man. Mtd. (1/8" Bottom Seal)
	K112046	Body, Man. Mtd. (3/16" Bottom Seal)
3	K013001	Magnet Bar
4	K272002	Sleeve Sub Assy
5*	K593108	Coil (115V 60Hz)
	K593112	Coil (230V 60Hz)
	K593097	Coil 24VDC
	K593107	Coil 115VDC

Item No.	Part Number	Description
6	K473010	Spring N.O. Valve
	K473011	Spring N.C. Valve
• 7	K343042	Plunger
8	K423020	Top Seat (1/8" Orifice)
	K423022	Top Seat (3/16" Orifice)
• 9	H13436	Seal
• 10	H14202	Seal
• 11	H14215	Seal
12	K322004	Junction Box Kit
• 13	K183012	Gasket

* Coil leads are 19" long.

• Parts included in Seal Kit K352 064.



Viking Life
 Viking Xtreme
 B
 ADEX
 N

Coils for L-Pilot Operated Valves

Voltage Code **	Voltage			Coil	
	60Hz	50Hz	DC	19" Leads	72" Leads
40	12	—	—	K593007	—
41,42	24	—	6	K593003	—
45*	—	—	12	K593010	—
49*	—	—	24 (Standard)	K593014	—
79	—	—	24 (Arc Suppressed)	K593271	—
51*	—	—	48	—	K593185
53*	120	110	—	K593025	—
57*	240	240	—	K593035	—
60	240	220	—	K593035	—
61	—	—	120	K593041	—

* Indicates voltages approved for solenoid operators designed for use in hazardous locations.

Coils for P-Pilot Operated Valves

Voltage Code **	Voltage			Coil	
	60Hz	50Hz	DC	19" Leads	72" Leads
42	24	—	—	K593099	—
43	—	24	—	K593098	—
45	—	—	12	K593094	—
49	—	—	24	K593097	—
51	—	—	48	—	K593254
53	115	—	—	K593108	—
58	—	230	—	K593111	—

N □ □ □ □ □ □ * * _____ Voltage Code

D

Viking Lite

Viking Xtreme

B

ADEX



N

Exhaust
Pressure

Top view indicates flow through 3-Way valve with coil de-energized.

NOTE: For normal valve operation, override must be in "out" position.



Normally Closed

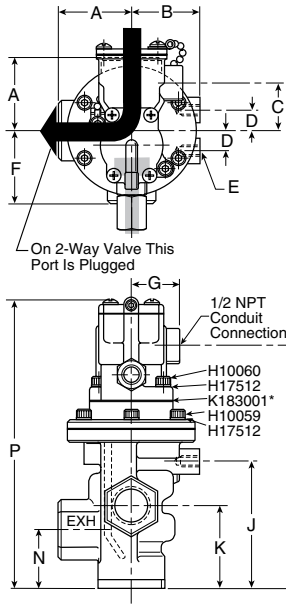

Dimensions

Key	3/8" Body		3/4" Body	
	Inch	mm	Inch	mm
A	1.56	40	2.13	54
B	1.50	38	1.94	49
C	1.81	46	1.34	34
D	.56	14	.56	14
E	3/8-16UNC 7/16" deep		3/8-16UNC 9/16" deep	
F	1.75	44	2.25	57
G	1.50	38	1.50	38
H	5.92	150	7.14	181
J	3.19	81	3.75	95
K	1.88	47	2.44	62
N	1.44	37	1.78	45
P	7.36	196	8.58	218
Q	2.31	59	3.09	84

Normally Open

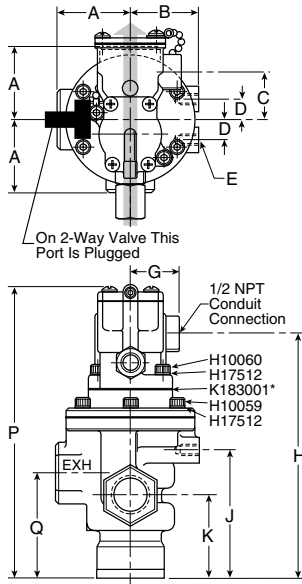

Service Kits

Include all parts normally required for in-service maintenance:

- 3/8" Basic Valve with standard service L-Pilots.....**K352076**
- 3/8" Basic Valve with continuous duty L-Pilots**K352276**
- 3/4" Basic Valve with standard service L-Pilots.....**K352077**
- 3/4" Basic Valve with continuous duty L-Pilots**K352277**

Key	3/8" Valve	3/4" Valve	Description
1	—	1/2" Tap K053075	Body (N.C.)
	3/8" Tap K053022	3/4" Tap K053076	
	1/2" Tap K053023	1" Tap K053220	
1A	—	3/4" Tap K053077	Body (N.O.)
	3/8" Tap K053025	3/4" Tap K053078	
	1/2" Tap K053026	1" Tap K053218	
2	K212001	K212002	Upper Piston Assy
3*	H13648	H13728	Seal
4*	H14510	H13676	U-Cup (3/8), O-Ring (3/4)

Key	3/8" Valve	3/4" Valve	Description
5	K493002	K493009	Stem
6	K202001	K202002	Lower Piston Assy.
7*	H14509	H13676	U-Cup (3/8), O-Ring (3/4)
8	H17811	H17813	Washer (2)
9	H06326	H06332	Stop Nut (2)
10	K103035	K103053	Bottom Cap (N.C.)
10A	K092020	K092034	Bottom Cap Assy. (N.O.)
11*	K183049	K183057	Gasket
12	K473014	K473015	Spring
13	K563015	K563017	Adapter
14*	K41RB72121	K41RB72221	O-Ring

* Parts included in seal kit

D


Viking Lite

Viking Xtreme

B

ADEX

N






Exhaust
Pressure



Top view indicates flow through 3-Way valve with coil de-energized.

NOTE: For normal valve operation, override must be in "out" position.

Normally Closed

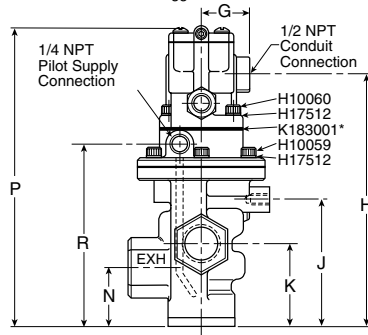

Normally Open

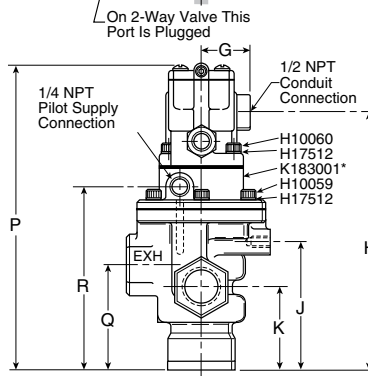

Dimensions

Key	3/8" Body		3/4" Body	
	Inch	mm	Inch	mm
A	1.56	40	2.13	54
B	1.50	38	1.94	49
C	1.81	46	1.34	34
D	.56	14	.56	14
E	3/8-16UNC 7/16" deep		3/8-16UNC 9/16" deep	
F	1.75	44	2.25	57
G	1.50	38	1.50	38
H	6.42	163	7.45	189
J	3.19	81	3.75	95
K	1.88	47	2.44	62
N	1.44	37	1.78	45
P	7.86	200	8.89	226
Q	2.31	59	3.09	84
R	4.34	110	5.38	137

Service Kits

Include all parts normally required for in-service maintenance:

- 3/8" Basic Valve with standard service L-Pilots.....**K352076**
- 3/8" Basic Valve with continuous duty L-Pilots**K352276**
- 3/4" Basic Valve with standard service L-Pilots.....**K352077**
- 3/4" Basic Valve with continuous duty L-Pilots**K352277**

Key	3/8" Valve	3/4" Valve	Description
1	—	1/2" Tap K053067	Body (N.C.)
	3/8" Tap K053019	3/4" Tap K053069	
	1/2" Tap K053157	1" Tap K053221	
1A	—	3/4" Tap K053065	Body (N.O.)
	3/8" Tap K053018	3/4" Tap K053070	
	1/2" Tap K053064	1" Tap K053219	
2	K212001	K212002	Upper Piston Assy
3*	H13648	H13728	Seal
4*	K41RB72211	H13676	O-Ring

Key	3/8" Valve	3/4" Valve	Description
5	K493002	K493009	Stem
6	K202001	K202002	Lower Piston Assy.
7*	K41RB72210	H13676	O-Ring
8	H17811	H17813	Washer (2)
9	H06326	H06332	Stop Nut (2)
10	K103035	K103053	Bottom Cap (N.C.)
10A	K092020	K092034	Bottom Cap Assy. (N.O.)
11	K473014	K473015	Spring
12*	K183049	K183057	Gasket
13	K563016	K563021	Adapter
14*	K41RB72121	K41RB72221	O-Ring

* Parts included in seal kit



D

Viking Lite

Viking Xtreme

B

ADEX

N

Exhaust
Pressure




Top view indicates flow through 3-Way valve with coil de-energized.

NOTE: For normal valve operation, override must be in "out" position.




Dimensions

Key	1-1/4" Body	
	Inch	mm
H	9.30	236
J	5.34	136
K	3.44	87
N	2.31	59
P	11.14	283
Q	4.56	116

Normally Closed



Normally Open



Service Kits

Includ e all parts normally required for in-service maintenance:

1-1/4" Basic Valve with standard service P-Pilot **K352078**

Key	1-1/4" Valve	Description
1	1" Tap K053111	Body (N.C.)
	1-1/4" Tap K053112	
	1-1/2" Tap K053113	
1A	1" Tap K053114	Body (N.O.)
	1-1/4" Tap K053115	
	1-1/2" Tap K053116	
2	K313029	Upper Piston Assy
3*	H13752	O-Ring
4*	H13728	Seal

Key	1-1/4" Valve	Description
5	K493016	Stem
6	K313028	Lower Piston
7*	H13728	Seal
8	H17817	Washer
9	H06338	Stop Nut
10	K092046	Bottom Cap (N.C.)
10A	K103061	Bottom Cap (N.O.)
11*	K183058	Gasket
12	K473016	Spring
13	K012003	Adapter
14*	K41RB72143	O-Ring

* Parts included in seal kit

D

Viking Lite





Viking Xtreme

B



ADEX

N

Normally Closed

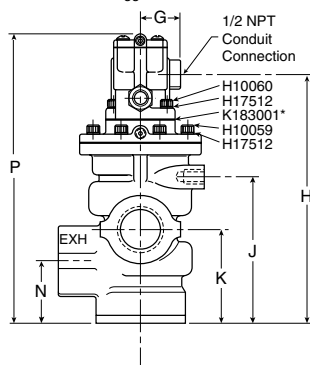

Normally Open



Exhaust
Pressure

Top view indicates flow through 3-Way valve with coil de-energized.

NOTE: For normal valve operation, override must be in "out" position.

Dimensions

Key	1-1/4" Body	
	Inch	mm
A	3.00	76
B	2.25	57
C	1.34	34
D	1.19	30
E	1/2-13 UNC 3/4 Deep	
F	3.13	80
G	1.50	38
H	9.02	229
J	5.34	136
K	3.44	87
N	2.31	59
P	10.45	265
Q	4.56	116

Service Kits

Include all parts normally required for in-service maintenance:

1-1/4" Basic Valve with continuous duty L-Pilot.....**K352080**

Key	1-1/4" Valve	Description
1	1" Tap K053111	Body (N.C.)
	1-1/4" Tap K053112	
	1-1/2" Tap K053113	
1A	1" Tap K053114	Body (N.O.)
	1-1/4" Tap K053115	
	1-1/2" Tap K053116	
2	K313029	Upper Piston Assy
3*	H13752	O-Ring
4*	H13728	Seal

Key	1-1/4" Valve	Description
5	K493016	Stem
6	K313028	Lower Piston
7*	H13728	Seal
8	H17817	Washer
9	H06338	Stop Nut
10	K092046	Bottom Cap (N.C.)
10A	K103061	Bottom Cap (N.O.)
11*	K183058	Gasket
12	K473016	Spring
13	K012003	Adapter
14*	K41RB72143	O-Ring

* Parts included in seal kit



Exhaust
Pressure




Top view indicates flow through 3-Way valve.

NOTE: For normal valve operation, override must be in "out" position.




Dimensions

Key	3/8" Body		3/4" Body		1-1/4" Body	
	Inch	mm	Inch	mm	Inch	mm
H	3.19	81	3.75	95	5.34	136
J	1.88	48	2.44	62	3.44	87
M	1.44	37	1.78	45	2.66	67
N	4.22	107	5.31	135	7.19	183
Q	2.31	59	3.09	78	4.56	116

Normally Closed



Normally Open



Service Kits

Include all parts normally required for in-service maintenance:

- 3/8" Basic Valve **K352073**
- 3/4" Basic Valve **K352074**
- 1-1/4" Basic Valve **K352075**

Key	3/8" Valve	3/4" Valve	1-1/4" Valve	Description
1	—	1/2" Tap K053075	1" Tap K053111	Body (N.O.)
	3/8" Tap K053022	3/4" Tap K053076	1-1/4" Tap K053112	
	1/2" Tap K053023	1" Tap K053220	1-1/2" Tap K053113	
1A	—	1/2" Tap K053077	1" Tap K053114	Body (N.C.)
	3/8" Tap K053025	3/4" Tap K053078	1-1/4" Tap K053115	
	1/2" Tap K053026	1" Tap K053218	1-1/2" Tap K053116	
2	K212001	K212002	K313029	Upper Piston Assy
3*	H13648	H13728	H13752	Seal
4*	H14510	H13676	H13728	Seal

Key	3/8" Valve	3/4" Valve	1-1/4" Valve	Description
5	K493002	K493009	K493016	Stem
6	K202001	K202002	K313028	Lower Piston Assy.
7*	H13499	H13676	H13728	Seal
8	H17811	H17813	H17817	Washer (2)
9	H06326	H06332	H06338	Stop Nut (2)
10	K092020	K092034	K092046	Bottom Cap (N.C.)
10A	K103035	K103053	K103061	Bottom Cap (N.O.)
11*	K183049	K183057	K183058	Gasket
12	K473014	K473015	K473016	Spring
14*	K41RB72121	K41RB72221	K41RB72143	O-Ring
21	K123018	K123021	K123024	Cover

* Parts included in seal kit

D

Viking
Lite

Viking
Xtreme



B

ADEX



N



Normally Closed

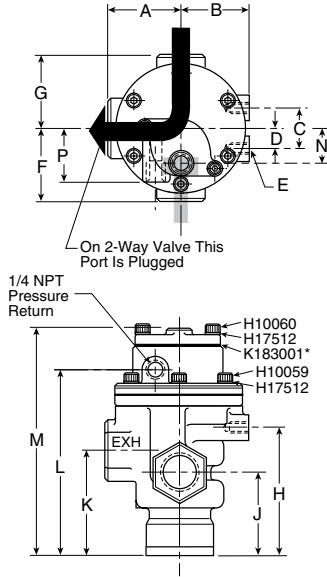

Normally Open

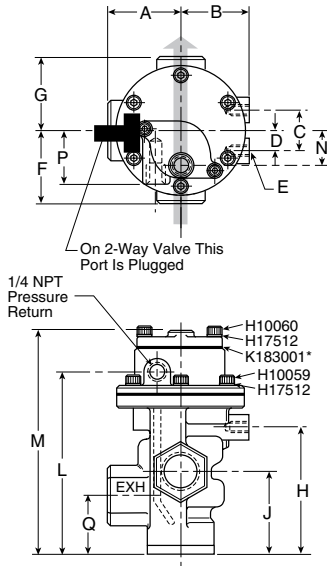

Exhaust
Pressure

Top view indicates flow through 3-Way valve.

NOTE: For normal valve operation, override must be in "out" position.

Dimensions

	3/8" Body		3/4" Body		1-1/4" Body	
Key	Inch	mm	Inch	mm	Inch	mm
A	1.56	40	2.13	54	3.00	76
B	1.50	38	1.94	49	2.25	57
C	1.13	29	1.13	29	2.38	60
D	.56	14	.56	14	1.19	30
E	3/8-16UNC 7/16" deep		3/8-16UNC 9/16" deep		1/2-13UNC 3/4" deep	
F	1.75	44	2.25	57	3.13	79
G	1.56	40	2.13	54	3.13	79
H	3.19	81	3.75	95	5.34	136
J	1.88	48	2.44	62	3.44	87
K	2.31	59	3.09	78	4.56	116
L	4.34	110	5.38	137	7.31	186
M	5.31	135	6.34	161	7.88	200
N	Left of center .53 13		On center 1.00 25			
Q	1.44	37	1.78	45	2.31	59

Service Kits

Include all parts normally required for in-service maintenance:

- 3/8" Basic Valve **K352031**
- 3/4" Basic Valve **K352056**
- 1-1/4" Basic Valve **K352083**

Key	3/8" Valve	3/4" Valve	1-1/4" Valve	Description
1	1/4" Tap K053011	1/2" Tap K053067	1" Tap K053143	Body (N.O.)
	—	3/4" Tap K053069	1-1/4" Tap K053110	
	1/2" Tap K053157	1" Tap K053221	1-1/2" Tap K053146	
1A	1/4" Tap K053010	1/2" Tap K053065	1" Tap K053159	Body (N.C.)
	—	3/4" Tap K053070	1-1/4" Tap K053144	
	1/2" Tap K053064	1" Tap K053219	1-1/2" Tap K053145	
2	K212001	K212002	K313029	Upper Piston Assy
3*	H13648	H13728	H13752	Seal
4*	H13529	H13676	H13728	Seal

Key	3/8" Valve	3/4" Valve	1-1/4" Valve	Part
5	K493002	K493009	K493016	Stem
6	K202001	K202002	K313028	Lower Piston Assy.
7*	H13499	H13676	H13728	Seal
8	H17811	H17813	H17817	Washer (2)
9	H06326	H06332	H06338	Stop Nut (2)
10	K092020	K092034	K092046	Bottom Cap Assy. (N.C.)
10A	K103035	K103053	K103061	Bottom Cap (N.O.)
11*	K183049	K183057	K183058	Gasket
12	K473014	K473015	K473016	Spring
13	K563016	K563021	K563027	Adapter
14*	K41RB72121	K41RB72221	K41RB72143	O-Ring
21	K323027	K323027	Not used	Cover

* Parts included in seal kit



D

Viking Lite

Viking Xtreme

B

ADEX

N

Notes

D
Viking Lite
Viking Xtreme
B
ADEX
N

Safety Guide For Selecting And Using Pneumatic Division Products And Related Accessories

WARNING:

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF PNEUMATIC DIVISION PRODUCTS, ASSEMBLIES OR RELATED ITEMS (“PRODUCTS”) CAN CAUSE DEATH, PERSONAL INJURY, AND PROPERTY DAMAGE. POSSIBLE CONSEQUENCES OF FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THESE PRODUCTS INCLUDE BUT ARE NOT LIMITED TO:

- Unintended or mistimed cycling or motion of machine members or failure to cycle
- Work pieces or component parts being thrown off at high speeds.
- Failure of a device to function properly for example, failure to clamp or unclamp an associated item or device.
- Explosion
- Suddenly moving or falling objects.
- Release of toxic or otherwise injurious liquids or gasses.

Before selecting or using any of these Products, it is important that you read and follow the instructions below.

1. GENERAL INSTRUCTIONS

- 1.1. Scope:** This safety guide is designed to cover general guidelines on the installation, use, and maintenance of Pneumatic Division Valves, FRLs (Filters, Pressure Regulators, and Lubricators), Vacuum products and related accessory components.
- 1.2. Fail-Safe:** Valves, FRLs, Vacuum products and their related components can and do fail without warning for many reasons. Design all systems and equipment in a fail-safe mode, so that failure of associated valves, FRLs or Vacuum products will not endanger persons or property.
- 1.3. Relevant International Standards:** For a good guide to the application of a broad spectrum of pneumatic fluid power devices see: ISO 4414:1998, Pneumatic Fluid Power – General Rules Relating to Systems. See www.iso.org for ordering information.
- 1.4. Distribution:** Provide a copy of this safety guide to each person that is responsible for selection, installation, or use of Valves, FRLs or Vacuum products. Do not select, or use Parker valves, FRLs or vacuum products without thoroughly reading and understanding this safety guide as well as the specific Parker publications for the products considered or selected.
- 1.5. User Responsibility:** Due to the wide variety of operating conditions and applications for valves, FRLs, and vacuum products Parker and its distributors do not represent or warrant that any particular valve, FRL or vacuum product is suitable for any specific end use system. This safety guide does not analyze all technical parameters that must be considered in selecting a product. The user, through its own analysis and testing, is solely responsible for:
 - Making the final selection of the appropriate valve, FRL, Vacuum component, or accessory.
 - Assuring that all user's performance, endurance, maintenance, safety, and warning requirements are met and that the application presents no health or safety hazards.
 - Complying with all existing warning labels and / or providing all appropriate health and safety warnings on the equipment on which the valves, FRLs or Vacuum products are used; and,
 - Assuring compliance with all applicable government and industry standards.
- 1.6. Safety Devices:** Safety devices should not be removed, or defeated.
- 1.7. Warning Labels:** Warning labels should not be removed, painted over or otherwise obscured.
- 1.8. Additional Questions:** Call the appropriate Parker technical service department if you have any questions or require any additional information. See the Parker publication for the product being considered or used, or call 1-800-CPARKER, or go to www.parker.com, for telephone numbers of the appropriate technical service department.

2. PRODUCT SELECTION INSTRUCTIONS

- 2.1. Flow Rate:** The flow rate requirements of a system are frequently the primary consideration when designing any pneumatic system. System components need to be able to provide adequate flow and pressure for the desired application.
- 2.2. Pressure Rating:** Never exceed the rated pressure of a product. Consult product labeling, Pneumatic Division catalogs or the instruction sheets supplied for maximum pressure ratings.
- 2.3. Temperature Rating:** Never exceed the temperature rating of a product. Excessive heat can shorten the life expectancy of a product and result in complete product failure.
- 2.4. Environment:** Many environmental conditions can affect the integrity and suitability of a product for a given application. Pneumatic Division products are designed for use in general purpose industrial applications. If these products are to be used in unusual circumstances such as direct sunlight and/or corrosive or caustic environments, such use can shorten the useful life and lead to premature failure of a product.
- 2.5. Lubrication and Compressor Carryover:** Some modern synthetic oils can and will attack nitrile seals. If there is any possibility of synthetic oils or greases migrating into the pneumatic components check for compatibility with the seal materials used. Consult the factory or product literature for materials of construction.
- 2.6. Polycarbonate Bowls and Sight Glasses:** To avoid potential polycarbonate bowl failures:
 - Do not locate polycarbonate bowls or sight glasses in areas where they could be subject to direct sunlight, impact blow, or temperatures outside of the rated range.
 - Do not expose or clean polycarbonate bowls with detergents, chlorinated hydro-carbons, ketones, esters or certain alcohols.
 - Do not use polycarbonate bowls or sight glasses in air systems where compressors are lubricated with fire resistant fluids such as phosphate ester and di-ester lubricants.

2.7. Chemical Compatibility: For more information on plastic component chemical compatibility see Pneumatic Division technical bulletins Tec-3, Tec-4, and Tec-5

2.8. Product Rupture: Product rupture can cause death, serious personal injury, and property damage.

- Do not connect pressure regulators or other Pneumatic Division products to bottled gas cylinders.
- Do not exceed the maximum primary pressure rating of any pressure regulator or any system component.
- Consult product labeling or product literature for pressure rating limitations.

3. PRODUCT ASSEMBLY AND INSTALLATION INSTRUCTIONS

3.1. Component Inspection: Prior to assembly or installation a careful examination of the valves, FRLs or vacuum products must be performed. All components must be checked for correct style, size, and catalog number. DO NOT use any component that displays any signs of nonconformance.

3.2. Installation Instructions: Parker published Installation Instructions must be followed for installation of Parker valves, FRLs and vacuum components. These instructions are provided with every Parker valve or FRL sold, or by calling 1-800-CPARKER, or at www.parker.com.

3.3. Air Supply: The air supply or control medium supplied to Valves, FRLs and Vacuum components must be moisture-free if ambient temperature can drop below freezing

4. VALVE AND FRL MAINTENANCE AND REPLACEMENT INSTRUCTIONS

4.1. Maintenance: Even with proper selection and installation, valve, FRL and vacuum products service life may be significantly reduced without a continuing maintenance program. The severity of the application, risk potential from a component failure, and experience with any known failures in the application or in similar applications should determine the frequency of inspections and the servicing or replacement of Pneumatic Division products so that products are replaced before any failure occurs. A maintenance program must be established and followed by the user and, at minimum, must include instructions 4.2 through 4.10.

4.2. Installation and Service Instructions: Before attempting to service or replace any worn or damaged parts consult the appropriate Service Bulletin for the valve or FRL in question for the appropriate practices to service the unit in question. These Service and Installation Instructions are provided with every Parker valve and FRL sold, or are available by calling 1-800-CPARKER, or by accessing the Parker web site at www.parker.com.

4.3. Lockout / Tagout Procedures: Be sure to follow all required lockout and tagout procedures when servicing equipment. For more information see: OSHA Standard – 29 CFR, Part 1910.147, Appendix A, The Control of Hazardous Energy – (Lockout / Tagout)

4.4. Visual Inspection: Any of the following conditions requires immediate system shut down and replacement of worn or damaged components:

- Air leakage: Look and listen to see if there are any signs of visual damage to any of the components in the system. Leakage is an indication of worn or damaged components.
- Damaged or degraded components: Look to see if there are any visible signs of wear or component degradation.
- Kinked, crushed, or damaged hoses. Kinked hoses can result in restricted air flow and lead to unpredictable system behavior.
- Any observed improper system or component function: Immediately shut down the system and correct malfunction.
- Excessive dirt build-up: Dirt and clutter can mask potentially hazardous situations.

Caution: Leak detection solutions should be rinsed off after use.

4.5. Routine Maintenance Issues:

- Remove excessive dirt, grime and clutter from work areas.
- Make sure all required guards and shields are in place.

4.6. Functional Test: Before initiating automatic operation, operate the system manually to make sure all required functions operate properly and safely.

4.7. Service or Replacement Intervals: It is the user's responsibility to establish appropriate service intervals. Valves, FRLs and vacuum products contain components that age, harden, wear, and otherwise deteriorate over time. Environmental conditions can significantly accelerate this process. Valves, FRLs and vacuum components need to be serviced or replaced on routine intervals. Service intervals need to be established based on:

- Previous performance experiences.
- Government and / or industrial standards.
- When failures could result in unacceptable down time, equipment damage or personal injury risk.

4.8. Servicing or Replacing of any Worn or Damaged Parts: To avoid unpredictable system behavior that can cause death, personal injury and property damage:

- Follow all government, state and local safety and servicing practices prior to service including but not limited to all OSHA Lockout Tagout procedures (OSHA Standard – 29 CFR, Part 1910.147, Appendix A, The Control of Hazardous Energy – Lockout / Tagout).
- Disconnect electrical supply (when necessary) before installation, servicing, or conversion.
- Disconnect air supply and depressurize all air lines connected to system and Pneumatic Division products before installation, service, or conversion.
- Installation, servicing, and / or conversion of these products must be performed by knowledgeable personnel who understand how pneumatic products are to be applied.
- After installation, servicing, or conversions air and electrical supplies (when necessary) should be connected and the product tested for proper function and leakage. If audible leakage is present, or if the product does not operate properly, do not put product or system into use.
- Warnings and specifications on the product should not be covered or painted over. If masking is not possible, contact your local representative for replacement labels.

4.9. Putting Serviced System Back into Operation: Follow the guidelines above and all relevant Installation and Maintenance Instructions supplied with the valve FRL or vacuum component to insure proper function of the system.

The goods, services or work (referred to as the "Products") offered by **Parker-Hannifin Corporation**, its subsidiaries, groups, divisions, and authorized distributors ("Seller") are offered for sale at prices indicated in the offer, or as may be established by Seller. The offer to sell the Products and acceptance of Seller's offer by any customer ("Buyer") is contingent upon, and will be governed by all of the terms and conditions contained in this Offer of Sale. Buyer's order for any Products specified in Buyer's purchase document or Seller's offer, proposal or quote ("Quote") attached to the purchase order, when communicated to Seller verbally, or in writing, shall constitute acceptance of this offer.

- 1. Terms and Conditions.** Seller's willingness to offer Products for sale or accept an order for Products is subject to the terms and conditions contained in this Offer of Sale or any newer version of the same, published by Seller electronically at www.parker.com/saleterms/. Seller objects to any contrary or additional terms or conditions of Buyer's order or any other document or other communication issued by Buyer.
- 2. Price; Payment.** Prices stated on Seller's Quote are valid for thirty (30) days, except as explicitly otherwise stated therein, and do not include any sales, use, or other taxes or duties unless specifically stated. Seller reserves the right to modify prices to adjust for any raw material price fluctuations. Unless otherwise specified by Seller, all prices are F.C.A. Seller's facility (INCOTERMS 2010). Payment is subject to credit approval and payment for all purchases is due thirty (30) days from the date of invoice (or such date as may be specified by Seller's Credit Department). Unpaid invoices beyond the specified payment date incur interest at the rate of 1.5% per month or the maximum allowable rate under applicable law.
- 3. Shipment; Delivery; Title and Risk of Loss.** All delivery dates are approximate. Seller is not responsible for damages resulting from any delay. Regardless of the manner of shipment, delivery occurs and title and risk of loss or damage pass to Buyer, upon placement of the Products with the shipment carrier at Seller's facility. Unless otherwise stated, Seller may exercise its judgment in choosing the carrier and means of delivery. No deferment of shipment at Buyers' request beyond the respective dates indicated will be made except on terms that will indemnify, defend and hold Seller harmless against all loss and additional expense. Buyer shall be responsible for any additional shipping charges incurred by Seller due to Buyer's acts or omissions.
- 4. Warranty.** Seller warrants that the Products sold hereunder shall be free from defects in material or workmanship for a period of twelve (12) months from the date of delivery or 2,000 hours of normal use, whichever occurs first. All prices are based upon the exclusive limited warranty stated above, and upon the following disclaimer: **DISCLAIMER OF WARRANTY: THIS WARRANTY IS THE SOLE AND ENTIRE WARRANTY PERTAINING TO PRODUCTS PROVIDED. SELLER DISCLAIMS ALL OTHER WARRANTIES, EXPRESS AND IMPLIED, INCLUDING DESIGN, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**
- 5. Claims; Commencement of Actions.** Buyer shall promptly inspect all Products upon receipt. No claims for shortages will be allowed unless reported to the Seller within ten (10) days of delivery. No other claims against Seller will be allowed unless asserted in writing within thirty (30) days after delivery. Buyer shall notify Seller of any alleged breach of warranty within thirty (30) days after the date the defect is or should have been discovered by Buyer. Any claim or action against Seller based upon breach of contract or any other theory, including tort, negligence, or otherwise must be commenced within twelve (12) months from the date of the alleged breach or other alleged event, without regard to the date of discovery.
- 6. LIMITATION OF LIABILITY.** IN THE EVENT OF A BREACH OF WARRANTY, SELLER WILL, AT ITS OPTION, REPAIR OR REPLACE A DEFECTIVE PRODUCT, OR REFUND THE PURCHASE PRICE WITHIN A REASONABLE PERIOD OF TIME. **IN NO EVENT IS SELLER LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF, OR AS THE RESULT OF, THE SALE, DELIVERY, NON-DELIVERY, SERVICING, USE OR LOSS OF USE OF THE PRODUCTS OR ANY PART THEREOF, OR FOR ANY CHARGES OR EXPENSES OF ANY NATURE INCURRED WITHOUT SELLER'S WRITTEN CONSENT, WHETHER BASED IN CONTRACT, TORT OR OTHER LEGAL THEORY. IN NO EVENT SHALL SELLER'S LIABILITY UNDER ANY CLAIM MADE BY BUYER EXCEED THE PURCHASE PRICE OF THE PRODUCTS.**
- 7. User Responsibility.** The user, through its own analysis and testing, is solely responsible for making the final selection of the system and Product and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application and follow applicable industry standards and Product information. If Seller provides Product or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the Products or systems.
- 8. Loss to Buyer's Property.** Any designs, tools, patterns, materials, drawings, confidential information or equipment furnished by Buyer or any other items which become Buyer's property, will be considered obsolete and may be destroyed by Seller after two (2) consecutive years have elapsed without Buyer ordering the items manufactured using such property. Seller shall not be responsible for any loss or damage to such property while it is in Seller's possession or control.
- 9. Special Tooling.** A tooling charge may be imposed for any special tooling, including without limitation, dies, fixtures, molds and patterns, acquired to manufacture Products. Such special tooling shall be and remain Seller's property notwithstanding payment of any charges by Buyer. In no event will Buyer acquire any interest in apparatus belonging to Seller which is utilized in the manufacture of the Products, even if such apparatus has been specially converted or adapted for such manufacture and notwithstanding any charges paid by Buyer. Unless otherwise agreed, Seller has the right to alter, discard or otherwise dispose of any special tooling or other property in its sole discretion at any time.
- 10. Buyer's Obligation; Rights of Seller.** To secure payment of all sums due or otherwise, Seller retains a security interest in all Products delivered to Buyer and this agreement is deemed to be a Security Agreement under the Uniform Commercial Code. Buyer authorizes Seller as its attorney to execute and file on Buyer's behalf all documents Seller deems necessary to perfect its security interest.
- 11. Improper Use and Indemnity.** Buyer shall indemnify, defend, and hold Seller harmless from any losses, claims, liabilities, damages, lawsuits, judgments and costs

- (including attorney fees and defense costs), whether for personal injury, property damage, patent, trademark or copyright infringement or any other claim, brought by or incurred by Buyer, Buyer's employees, or any other person, arising out of: (a) improper selection, application, design, specification or other misuse of Products purchased by Buyer from Seller; (b) any act or omission, negligent or otherwise, of Buyer; (c) Seller's use of patterns, plans, drawings, or specifications furnished by Buyer to manufacture Products; or (d) Buyer's failure to comply with these terms and conditions. Seller shall not indemnify Buyer under any circumstance except as otherwise provided.
- 12. Cancellations and Changes.** Buyer may not cancel or modify or cancel any order for any reason, except with Seller's written consent and upon terms that will indemnify, defend and hold Seller harmless against all direct, incidental and consequential loss or damage. Seller may change Product features, specifications, designs and availability.
- 13. Limitation on Assignment.** Buyer may not assign its rights or obligations under this agreement without the prior written consent of Seller.
- 14. Force Majeure.** Seller does not assume the risk and is not liable for delay or failure to perform any of Seller's obligations by reason of events or circumstances beyond its reasonable control (hereinafter "Events of Force Majeure"). Events of Force Majeure shall include without limitation: accidents, strikes or labor disputes, acts of any government or government agency, acts of nature, delays or failures in delivery from carriers or suppliers, shortages of materials, or any other cause beyond Seller's reasonable control.
- 15. Waiver and Severability.** Failure to enforce any provision of this agreement will not invalidate that provision; nor will any such failure prejudice Seller's right to enforce that provision in the future. Invalidation of any provision of this agreement by legislation or other rule of law shall not invalidate any other provision herein. The remaining provisions of this agreement will remain in full force and effect.
- 16. Termination.** Seller may terminate this agreement for any reason and at any time by giving Buyer thirty (30) days prior written notice. Seller may immediately terminate this agreement, in writing, if Buyer: (a) breaches any provision of this agreement (b) appoints a trustee, receiver or custodian for all or any part of Buyer's property (c) files a petition for relief in bankruptcy on its own behalf, or one if filed by a third party (d) makes an assignment for the benefit of creditors; or (e) dissolves its business or liquidates all or a majority of its assets.
- 17. Governing Law.** This agreement and the sale and delivery of all Products are deemed to have taken place in, and shall be governed and construed in accordance with, the laws of the State of Ohio, as applicable to contracts executed and wholly performed therein and without regard to conflicts of laws principles. Buyer irrevocably agrees and consents to the exclusive jurisdiction and venue of the courts of Cuyahoga County, Ohio with respect to any dispute, controversy or claim arising out of or relating to this agreement.
- 18. Indemnity for Infringement of Intellectual Property Rights.** Seller is not liable for infringement of any patents, trademarks, copyrights, trade dress, trade secrets or similar rights except as provided in this Section. Seller will defend and indemnify Buyer against allegations of infringement of U.S. patents, U.S. trademarks, copyrights, trade dress and trade secrets ("Intellectual Property Rights"). Seller will defend at its expense and will pay the cost of any settlement or damages awarded in an action brought against Buyer based on an allegation that a Product sold pursuant to this agreement infringes the Intellectual Property Rights of a third party. Seller's obligation to defend and indemnify Buyer is contingent on Buyer notifying Seller within ten (10) days after Buyer becomes aware of such allegations of infringement, and Seller having sole control over the defense of any allegations or actions including all negotiations for settlement or compromise. If a Product is subject to a claim that it infringes the Intellectual Property Rights of a third party, Seller may, at its sole expense and option, procure for Buyer the right to continue using the Product, replace or modify the Product so as to make it noninfringing, or offer to accept return of the Product and refund the purchase price less a reasonable allowance for depreciation. Notwithstanding the foregoing, Seller is not liable for claims of infringement based on information provided by Buyer, or directed to Products delivered hereunder for which the designs are specified in whole or part by Buyer, or infringements resulting from the modification, combination or use in a system of any Product sold hereunder. The foregoing provisions of this Section constitute Seller's sole and exclusive liability and Buyer's sole and exclusive remedy for infringement of Intellectual Property Rights.
- 19. Entire Agreement.** This agreement contains the entire agreement between the Buyer and Seller and constitutes the final, complete and exclusive expression of the terms of sale. All prior or contemporaneous written or oral agreements or negotiations with respect to the subject matter are herein merged. The terms contained herein may not be modified unless in writing and signed by an authorized representative of Seller.
- 20. Compliance with Laws.** Buyer agrees to comply with all applicable laws, regulations, and industry and professional standards of care, including those of the United Kingdom, the United States of America, and the country or countries in which Buyer may operate, including without limitation the U. K. Bribery Act, the U.S. Foreign Corrupt Practices Act ("FCPA"), the U.S. Anti-Kickback Act ("Anti-Kickback Act") and the U.S. Food Drug and Cosmetic Act ("FDCA"), each as currently amended, and the rules and regulations promulgated by the U.S. Food and Drug Administration ("FDA"), and agrees to indemnify and hold harmless Seller from the consequences of any violation of such provisions by Buyer, its employees or agents. Buyer acknowledges that it is familiar with the provisions of the U. K. Bribery Act, the FCPA, the FDA, and the Anti-Kickback Act, and certifies that Buyer will adhere to the requirements thereof. In particular, Buyer represents and agrees that Buyer will not make any payment or give anything of value, directly or indirectly to any governmental official, any foreign political party or official thereof, any candidate for foreign political office, or any commercial entity or person, for the purpose of influencing such person to purchase Products or otherwise benefit the business of Seller.